

# PRODUCT CATALOGUE





# TECNOLIGHT<sup>®</sup>

*the Art of illumination*


*Over 17 Years of experience in production  
and customized lighting.*


# **We work on** *reaching the passion* **your vision,** *wherever you are*

Over a period of 17 years Tecnolight earned the reputation as one of the largest independent luminaire technologies in Italy.




Our core belief of providing the highest quality products backed up by unrivaled customer service remains the key driving force for achieving our future goals. Diversity within the Tecnolight product range is central to its success. Custom made LED lighting solution as a package enables us to offer techno commercially competitive, energy efficient, environment friendly and sustainable products with market leading warranty.

# TABBLE OF CONTENTS

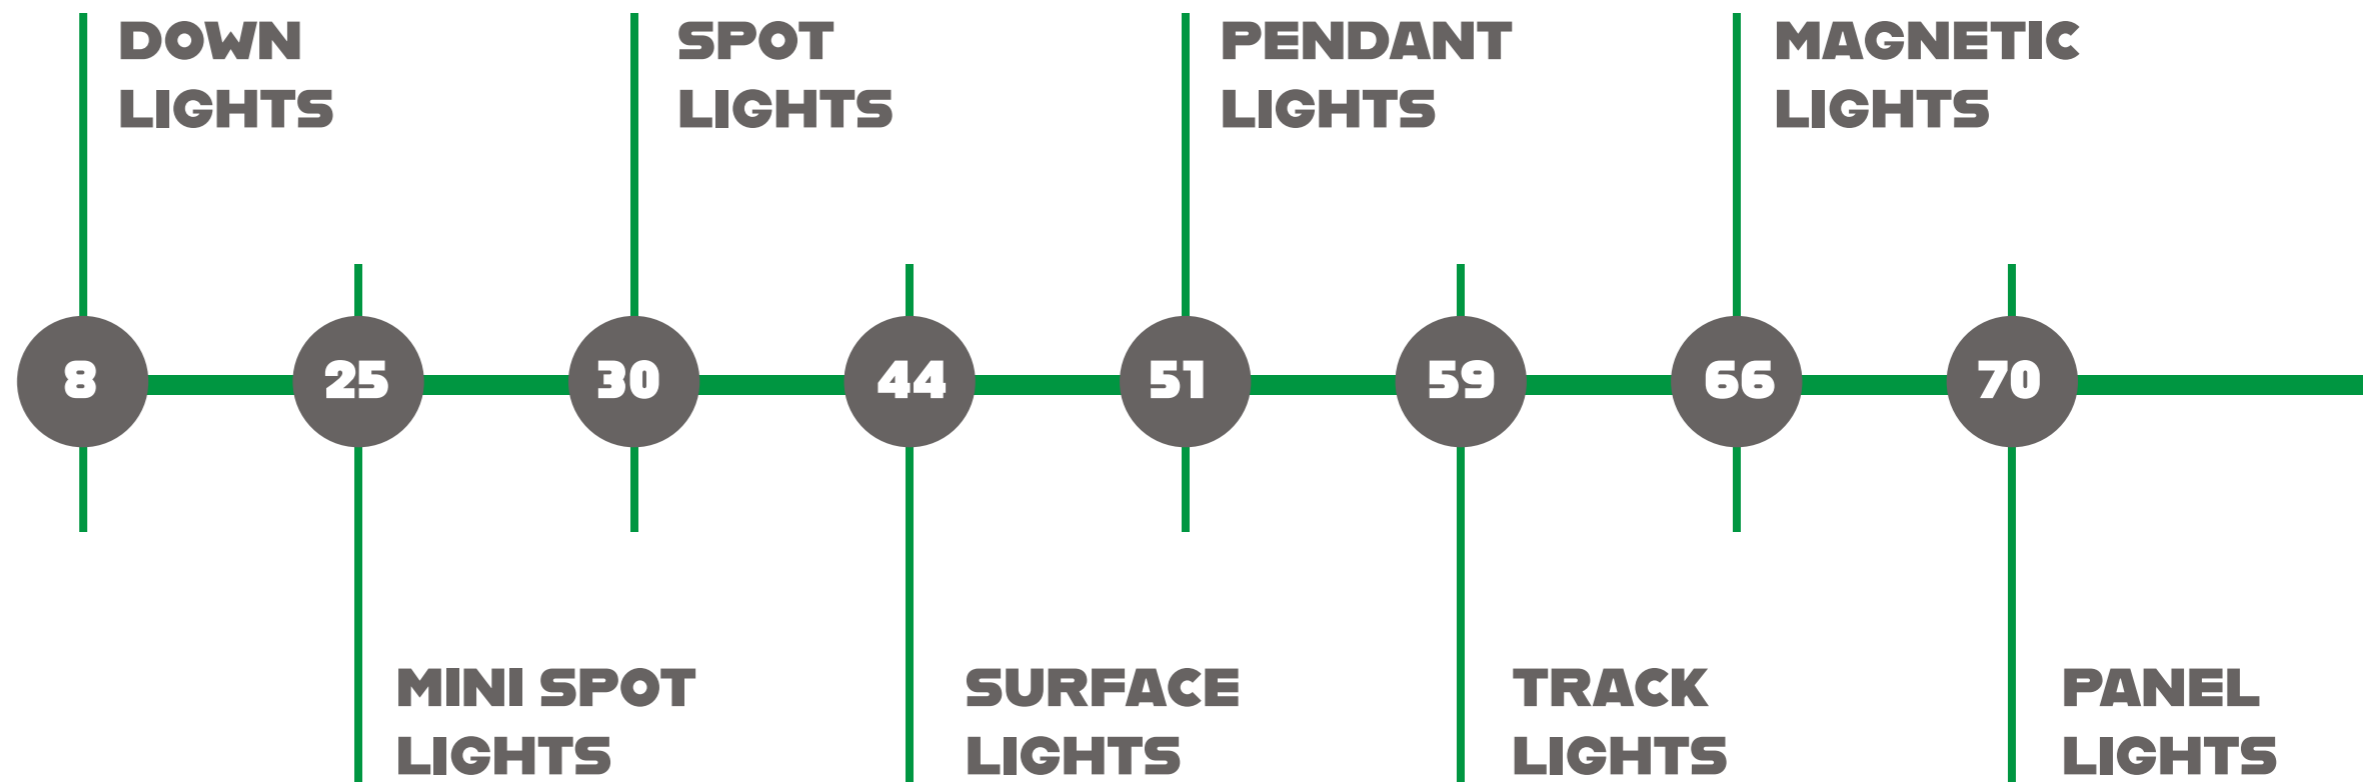

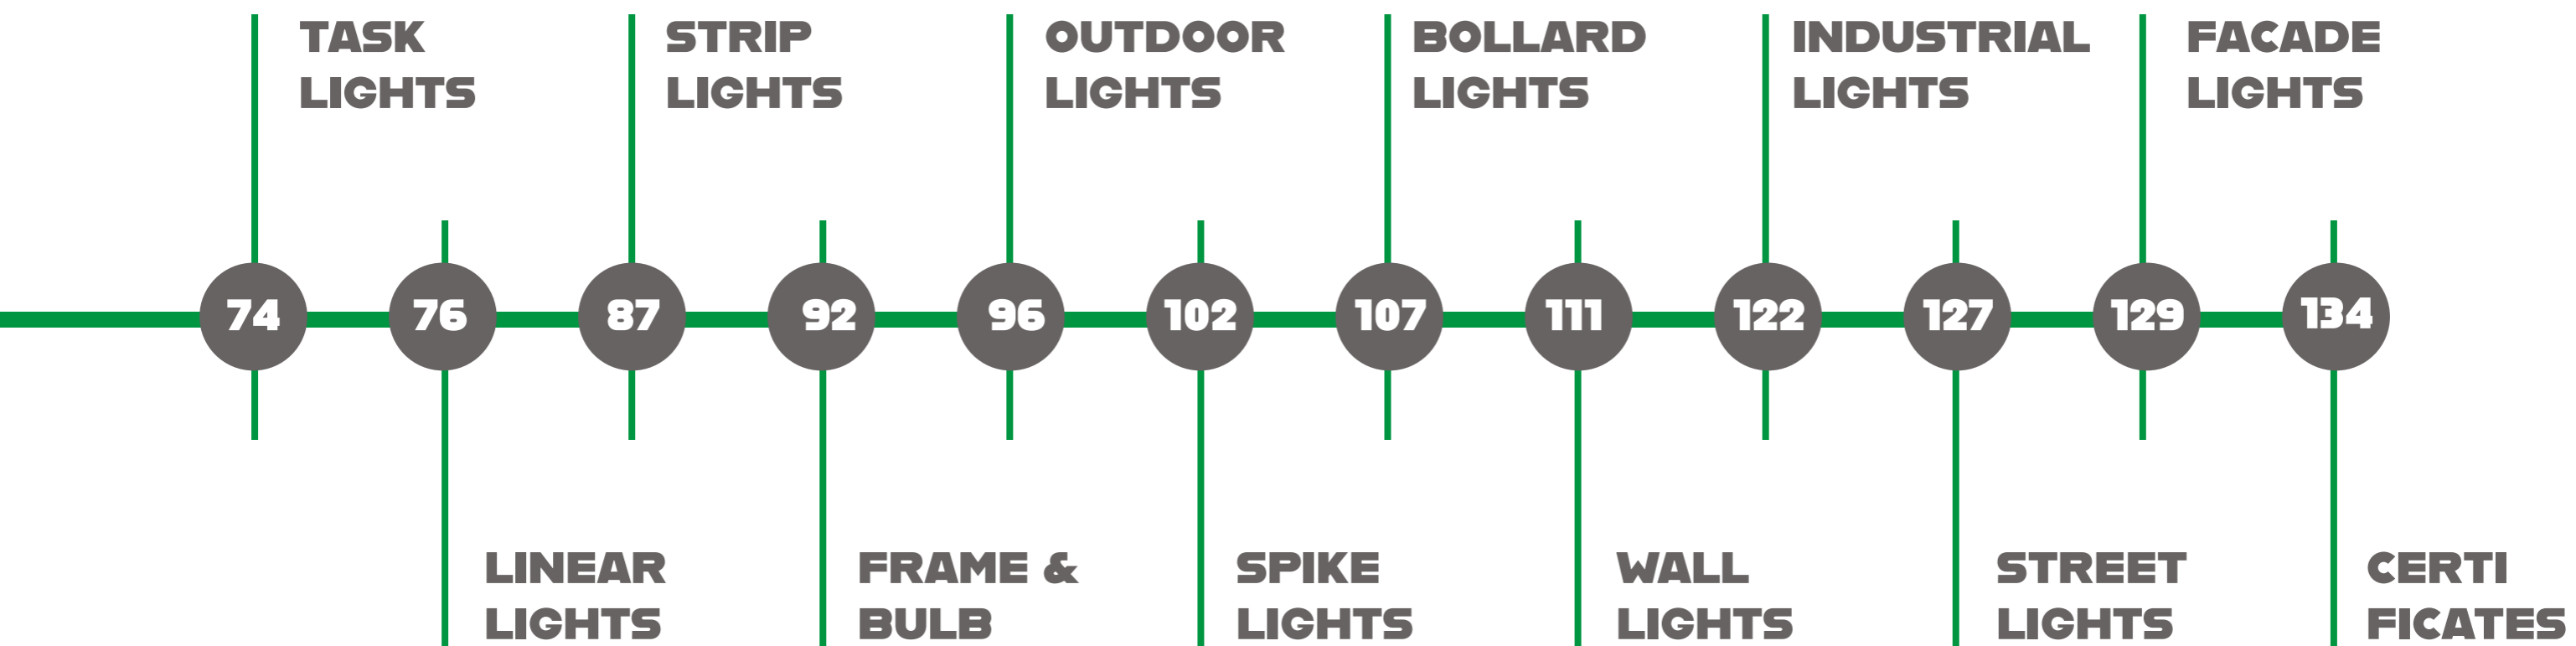

## BEAM SPREAD

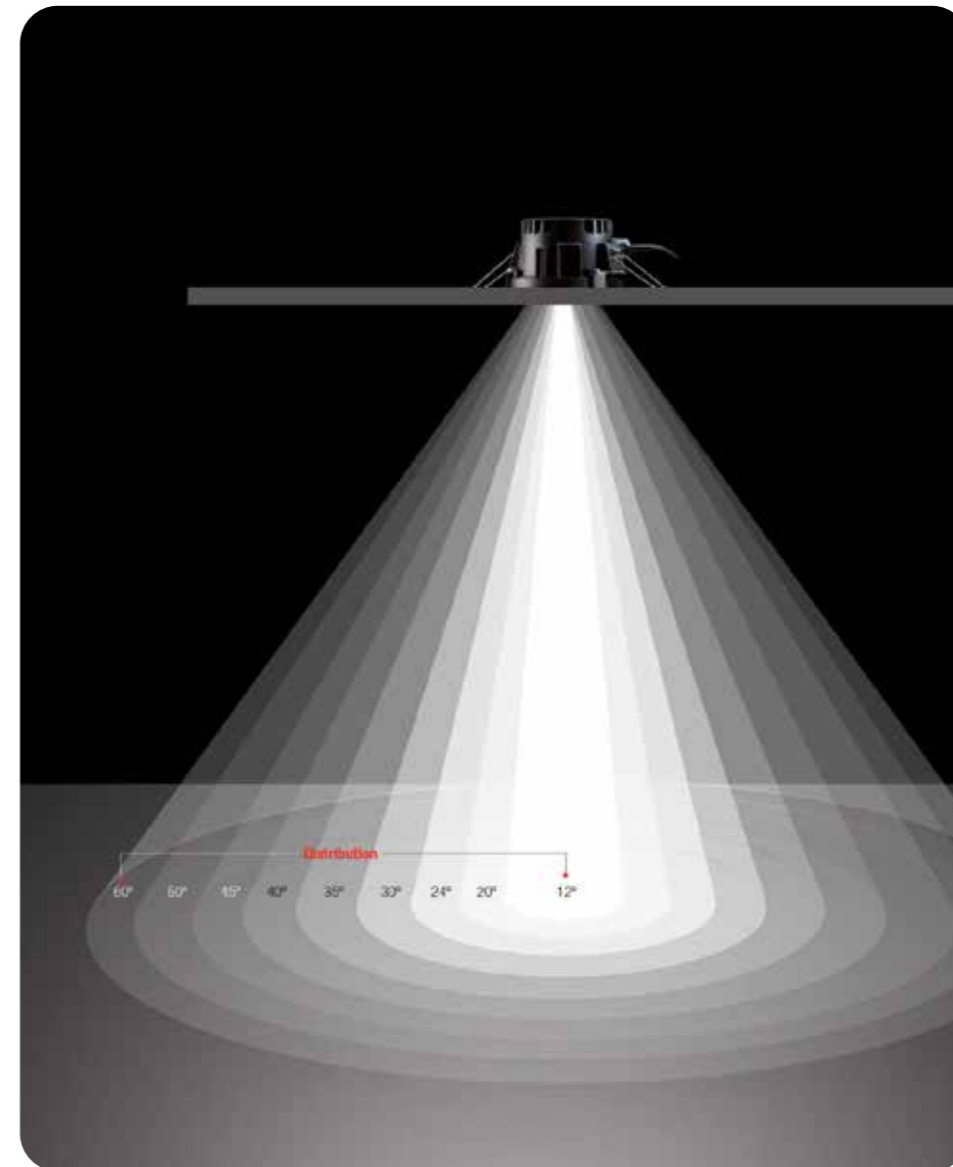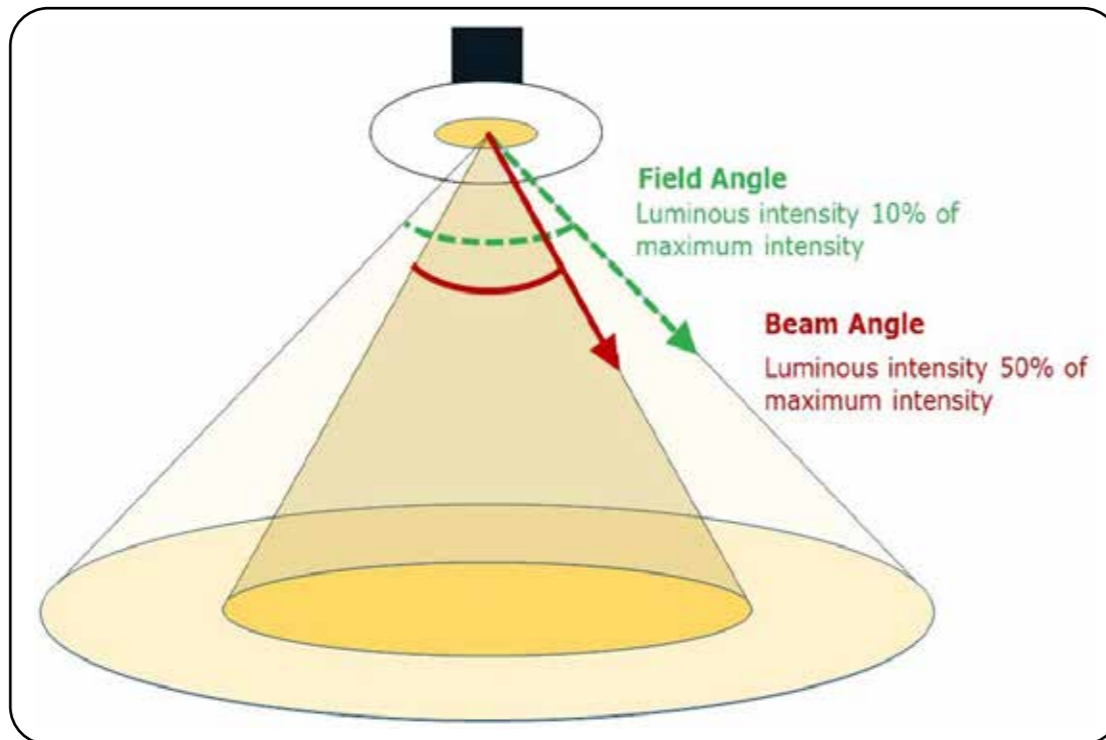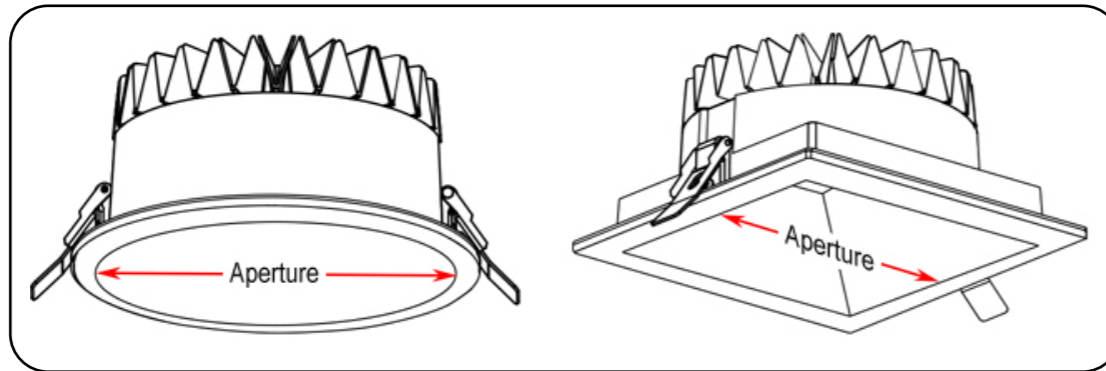

Downlights, also known as recessed lights or recessed fixtures, are light fixtures that are installed in hollow openings in ceilings. They are typically used to provide general lighting in a room, but they can also be used for task lighting or accent lighting.

Downlights come in a variety of shapes and sizes, and they can be made from a variety of materials. The most common type of downlight is the LED downlight, which is energy-efficient and long-lasting.

*If you are looking for a versatile, energy-efficient, and long-lasting light fixture for your home, then downlights are a great option.*

**Downlights offer a number of advantages over other types of light fixtures. They are:**

- **Discreet:** Downlights are recessed into the ceiling, so they do not take up any space. This makes them ideal for rooms with low ceilings or small spaces.
- **Versatile:** Downlights can be used to create a variety of lighting effects. They can be used to provide general lighting, task lighting, or accent lighting.
- **Energy-efficient:** LED downlights are very energy-efficient, which can save you money on your energy bills.
- **Long-lasting:** LED downlights have a lifespan of up to 7 years, which means you will not have to replace them as often as other types of light fixtures.

**Here are some of the most common types of downlights:**

- **Integrated downlights:** These downlights have the light source and the housing built into one unit. They are the most common type of downlight and are easy to install.
- **Retrofit downlights:** These downlights are designed to fit into existing ceiling voids. They are a good option if you do not want to damage your ceiling during installation.
- **Adjustable downlights:** These downlights can be moved to direct the light where you want it. They are a good option for task lighting or accent lighting.
- **Fire-rated downlights:** These downlights are designed to prevent the spread of fire in the event of a fire. They are required in some buildings, such as hotels and office buildings.

**When choosing downlights for your home, it is important to consider the following factors:**

- **The size and shape of the room:** You will need to choose downlights that are the right size for the room and that will create the desired lighting effect.
- **The type of ceiling:** If you have a low ceiling, you will need to choose downlights that are low-profile.
- **The light source:** You can choose from halogen, incandescent, or LED downlights. LED downlights are the most energy-efficient option.
- **The finish:** Downlights come in a variety of finishes, such as white, black, and chrome. Choose a finish that will complement the décor of your room.

# DOWN LIGHTS

## WHEEL | 99640.000

RECESSED ANTI GLARE DOWNLIGHT



IP44 CRI≥90 50,000 Hrs | LM80 | B10 UGR<19

Wheel is a discreet and gentle light source that does not cause any glare. Introducing our Die Cast Aluminium LED downlight. Sleek design, Cree chip for brilliant illumination. Black or white, customizable colors. 36-degree beam angle, optional request. CCT from 2700K to 6500K. Perfect for versatile lighting.

### Related Family & Dimension

Rated Power	7W
D-H (mm)	95-36
Surface Cutout (MM)	76

Rated Power	12W
D-H (mm)	135-36
Surface Cutout (MM)	106

For More Details Scan QR Code



## CELIO | 91140.000

RECESSED ANTI GLARE DOWNLIGHT



IP40 CRI≥90 50,000 Hrs | LM80 | B10 UGR<19

Introducing Celio which is Die Cast Aluminium LED Downlight. Powered by Cree chip, it boasts an anodized Aluminium reflector and optic lens diffuser for optimal lighting. The body is customizable in white, black, or your preferred finish. Choose from 24, 40, or 60-degree beam angles, with options available upon request. Enjoy a versatile color temperature from 2700K to 6500K. Illuminate your space with style and precision.

### Related Family & Dimension

Rated Power	12W
D-H (mm)	120-87
Surface Cutout (mm)	102

Rated Power	20W
D-H (mm)	140-100
Surface Cutout (mm)	120

Rated Power	30W
D-H (mm)	160-110
Surface Cutout (mm)	138

Rated Power	40W
D-H (mm)	183-127
Surface Cutout (mm)	163

For More Details Scan QR Code



## HORUS | 91260.000

RECESSED ANTI GLARE DOWNLIGHT



IP40 CRI≥90 50,000 Hrs | LM80 | B10 UGR<19

Introducing "Horus," our Die Cast Aluminium LED downlight. Powered by Cree and Luminus chips, it features a Mirrored Chrome reflector and Textured Convex Lens for precision lighting. Customizable in white, black, or your preferred finish, it offers a 36 or 60-degree beam angle, with options available on request. Choose a color temperature from 2700K to 6500K. Illuminate with style and versatility.

### Related Family & Dimension

Rated Power	9W
D-H (mm)	87-84
Surface Cutout (mm)	73

Rated Power	12W
D-H (mm)	112-68
Surface Cutout (mm)	100

Rated Power	20W   30W
D-H (mm)	164-112
Surface Cutout (mm)	150

Rated Power	40W
D-H (mm)	218-112
Surface Cutout (mm)	196

For More Details Scan QR Code



## ZIBRA | 94900.000

RECESSED ANTI GLARE DOWNLIGHT



IP44 | CRI≥90 | 50,000 Hrs | LM80 | B10 | UGR<19

Elevate your space with our versatile Die Cast Aluminium Downlight Zibra, available in a range of color temperatures from warm 2700K to cool 6000K. Its sleek aluminium chrome reflector and optic lens diffuser cast a focused beam of light, while its black, white, or customized body seamlessly blends into any décor. Choose from 36 or 60-degree beam angles to suit your specific lighting needs.

### Related Family & Dimension

Rated Power	20W/30W
D-H (mm)	213-66
Surface Cutout (mm)	197

For More Details Scan QR Code



## ACCENT | 94540.000

RECESSED ANTI GLARE DOWNLIGHT



IP44 | CRI≥90 | 50,000 Hrs | LM80 | B10 | UGR<19

Introducing "Accent," our Cree-powered Die Cast Aluminium LED downlight. Anti-Glare Aluminium reflector, Clear Glass with Honeycomb Louvre diffuser, customizable finish in white, black, or your choice. Choose 24 and 45-degree beam angles. Accent offers versatile lighting from 2700K to 6500K. Illuminate with style and precision.

### Related Family & Dimension

Rated Power	10W
D-H (mm)	95-130
Surface Cutout (mm)	87
Rated Power	15W
D-H (mm)	115-176
Surface Cutout (mm)	107
Rated Power	25W
D-H (mm)	135-174
Surface Cutout (mm)	125
Rated Power	30W
D-H (mm)	155-168
Surface Cutout (mm)	135

For More Details Scan QR Code



## LEVA R | 93590.000

RECESSED TRIMLESS ANTIGLARE DOWNLIGHT




IP40 | CRI≥90 | 50,000 Hrs | LM80 | B10 | UGR<19

Enhance your space with our versatile Die Cast Aluminium Downlight Leva R, offering a range of color temperatures from warm 2700K to cool 6000K. Its sleek chrome mirror reflector and optic lens diffuser provide a focused beam of light, while its black, white, or customized body blends effortlessly into any décor. Choose from 36-degree beam angles or customize to suit your specific lighting needs.

### Related Family & Dimension

Rated Power	12W
Diameter (mm)	103
Height (mm)	84
Rated Power	20W
Diameter (mm)	130
Height (mm)	110

For More Details Scan QR Code



## LOURVE | 96070.000

RECESSED TRIMLESS ANTIGLARE DOWNLIGHT



IP40 CRI≥85 50,000 Hrs | LM80 | B10 RoHS

Meet Lourve, the Trimless Spotlight with Cree power, and Anodized Aluminium reflector for precise illumination. Available in white, black, or custom finishes. Lourve's CCT ranges from 2700K to 6500K, providing versatile and customizable lighting in a sleek design.

### Related Family & Dimension

Rated Power	8W
Diameter (mm)	54
Height (mm)	75
Surface Cutout	96

Rated Power	12W
Diameter (mm)	71
Height (mm)	95
Surface Cutout	113

Rated Power	20W
Diameter (mm)	93
Height (mm)	121
Surface Cutout	137

For More Details Scan QR Code



## LEVA SQ | 93600.000

RECESSED TRIMLESS ANTIGLARE DOWNLIGHT



IP40 CRI≥90 50,000 Hrs | LM80 | B10 UGR<19

Transform your surroundings with our versatile Die Cast Aluminium Downlight Leva SQ, featuring a spectrum of color temperatures ranging from warm 2700K to cool 6000K. Its sophisticated chrome mirror reflector and optic lens diffuser cast a concentrated beam of light, while its black, white, or customizable body effortlessly blends into any interior design. Select from 36-degree beam angles or customize to tailor your lighting requirements.

### Related Family & Dimension

Rated Power	12W
Length (mm)	101
Width (mm)	101
Height (mm)	82

Rated Power	20W
Length (mm)	130
Width (mm)	130
Height (mm)	110

For More Details Scan QR Code



## LEVA PRIME SQ

RECESSED SLIM TRIM ANTIGLARE DOWNLIGHT



IP40 CRI≥90 50,000 Hrs | LM80 | B10 RoHS

Meet "Leva Prime SQ," our Die Cast Aluminium LED Downlight. Powered by a Cree chip, it features a Deep Anti Glare Reflector and Optic Lens for precise lighting. Choose from white, black, or a customizable finish to suit your style. With a 60-degree beam angle and options available on request, Leva Prime SQ offers versatility in illuminating your space. Select a color temperature from 2700K to 6500K for the perfect ambiance.

### Related Family & Dimension

Rated Power	2 X 20W
Length (mm)	210
Width (mm)	110
Height (mm)	129

For More Details Scan QR Code



## MYSTRO | 96750.000

RECESSED SLIM TRIM DOWNLIGHT



IP54 CRI≥90 50,000 Hrs | LM80 | B10 RoHS

Introducing Mystro: a sleek die-cast aluminium downlight powered by Luminus. Choose white, black, or customize the finish. It comes with optic lens diffuser deliver a focused 40-degree beam angle, adjustable on request. With a color temperature range of 2700K to 6500K, Mystro blends style and functionality effortlessly.

### Related Family & Dimension

Rated Power	6W
Diameter (mm)	65
Height (mm)	41
Surface Cutout	53
Rated Power	12W
Diameter (mm)	85
Height (mm)	65
Surface Cutout	75
Rated Power	20W
Diameter (mm)	115
Height (mm)	76
Surface Cutout	105
Rated Power	30W
Diameter (mm)	135
Height (mm)	95
Surface Cutout	125

For More Details Scan QR Code



## CANEX | 91680.000

RECESSED SLIM TRIM DOWNLIGHT



IP40 CRI≥90 RoHS 50,000 Hrs | LM80 | B10

Meet Canex, a sleek luminaire powered by Cree with a die-cast aluminium body. Customize the finish in white, black, or your preference. The optic lens with aluminium reflector for stunning effects. Choose from beam angles of 15, 24, 38, and 60 degrees. With color temperatures from 2700K to 6500K, Canex effortlessly combines style and versatility.

### Related Family & Dimension

Power Rated	8.5W
Diameter (mm)	83
Height (mm)	95
Power Rated	13.5W
Diameter (mm)	83
Height (mm)	118
Power Rated	20W
Diameter (mm)	83
Height (mm)	142

For More Details Scan QR Code



## CANTEX | 93080.000

RECESSED SLIM TRIM DOWNLIGHT



IP44 CRI≥90 50,000 Hrs | LM80 | B10 UGR<19

Meet "Cantex," our Cree-powered Die Cast Aluminium LED downlight. Frosted glass diffuser, customizable finish in white, black, or your choice. Choose from 24, 38, and 60-degree beam angles, with optional adjustments. Cantex provides versatile lighting from 2700K to 6500K. Illuminate your space with precision and style.

### Related Family & Dimension

Rated Power	20W
D-H (mm)	87-97
Surface Cutout (mm)	78

For More Details Scan QR Code



## TESTO | 91110.000

RECESSED DOWNLIGHT



IP44 CRI≥90 50,000 Hrs | LM80 | B10 RoHS

Introducing “Testo,” our Cree-powered Die Cast Aluminium LED downlight. With an Anodized Aluminium reflector and Clear Glass diffuser, Testo offers clear illumination. Choose from white, black, or customizable finishes. Opt for 24, 36, 40, and 60-degree beam angles, with optional adjustments. Testo provides versatile lighting at color temperatures from 2700K to 6500K. Illuminate your space with precision and style.

### Related Family & Dimension

Rated Power	12W	Rated Power	60W
D-H (mm)	115-75	D-H (mm)	230-96
Surface Cutout (mm)	95	Surface Cutout (mm)	196

Rated Power	22W
D-H (mm)	175-100
Surface Cutout (mm)	152

Rated Power	30W
D-H (mm)	195-105
Surface Cutout (mm)	170

Rated Power	36W
D-H (mm)	230-125
Surface Cutout (mm)	196

For More Details Scan QR Code



## SLEEK | 93560.000

RECESSED DOWNLIGHT



IP40 CRI≥90 50,000 Hrs | LM80 | B10 RoHS

Meet “Sleek,” our Cree-powered Die Cast Aluminium LED downlight. Anodized Aluminium reflector, Clear Glass diffuser, customizable finish in white, black, or your choice. Opt for 45 and 60-degree beam angles. Sleek offers versatile lighting from 2700K to 6500K. Illuminate with style and precision.

### Related Family & Dimension

Rated Power	30W
D-H (mm)	130-125
Surface Cutout (mm)	110

Rated Power	40W
D-H (mm)	160-157
Surface Cutout (mm)	134

Rated Power	50W
D-H (mm)	185-158
Surface Cutout (mm)	153

For More Details Scan QR Code



## ARTERIALS FR | 91220.000

RECESSED DOWNLIGHT



IP44 CRI≥90 50,000 Hrs | LM80 | B10 RoHS

Meet “ARTERIALS FR,” our Cree-powered Die Cast Aluminium LED Fixture. Clear Glass diffuser, customizable finish in white, black, or your choice. Choose 15, 30, and 45-degree beam angles for versatile lighting. ARTERIALS FR illuminates with precision from 2700K to 6500K, combining style and functionality.

### Related Family & Dimension

Rated Power	15W
D-H (mm)	140-88
Surface Cutout (mm)	120

Rated Power	30W
D-H (mm)	175-100
Surface Cutout (mm)	155

Rated Power	40W
D-H (mm)	195-105
Surface Cutout (mm)	175

For More Details Scan QR Code



## ARTERIONS DR | 91230.000

RECESSED DOWNLIGHT



IP44 CRI>90 50,000 Hrs | LM80 | B10 RoHS

Introducing "ARTERIONS DR," our Cree-powered Die Cast Aluminium LED Downlight. Clear Glass diffuser, customizable finish in white, black, or your choice. Choose 15, 30, and 45-degree beam angles. ARTERIONS DR offers versatile lighting from 2700K to 6500K. Illuminate with precision and style.

### Related Family & Dimension

Rated Power	15W
D-H (mm)	140-88
Surface Cutout (mm)	120
Rated Power	30W
D-H (mm)	175-100
Surface Cutout (mm)	155
Rated Power	40W
D-H (mm)	195-105
Surface Cutout (mm)	175

For More Details Scan QR Code



**LIGHT CREATES  
AMBIANCE & FEEL OF  
A PLACE, AS WELL AS  
THE EXPRESSION OF  
A STRUCTURE.**

## CIANA | 91460.000

RECESSED ADJUSTABLE TRIMLESS DOWNLIGHT



IP40 CRI≥90 50,000 Hrs | LM80 | B10 RoHS

Meet "Ciana," our Die Cast Aluminium LED downlight, powered by Cree for exceptional performance. With an Anodized Aluminium reflector and Clear Glass diffuser, Ciana offers customizable illumination in white, black, or a customizable finish. Choose your preferred 24 or 36-degree beam angle. Ciana provides versatile lighting at color temperatures from 2700K to 6500K. Illuminate with precision and style.

### Related Family & Dimension

Rated Power	15W/20W
Length (mm)	155
Width (mm)	71
Height (mm)	119

For More Details Scan QR Code



## ELAPHROS | 96330.000

RECESSED 360° ADJUSTABLE TRIMLESS DOWNLIGHT



IP44 CRI≥90 50,000 Hrs | LM80 | B10 RoHS

Meet "Elaphros," our Cree-powered Die Cast Aluminium LED downlight. With an Optic Lens diffuser and customizable finish in white, black, or your choice, Elaphros offers adjustable illumination. Choose between 24 and 36-degree beam angles. Elaphros delivers versatile lighting at color temperatures from 2700K to 6500K. Illuminate your space with style and precision.

### Related Family & Dimension

Rated Power	10W
Length (mm)	00
Width (mm)	00
Height (mm)	00

For More Details Scan QR Code



## CIANA PRIME SQ | 90220.000

RECESSED ADJUSTABLE TRIMLESS DOWNLIGHT




IP40 CRI≥90 50,000 Hrs | LM80 | B10 RoHS

Introducing "Ciana Prime SQ," our sleek Die Cast Aluminium LED downlight powered by Cree. Featuring an Anodized Aluminium reflector and Clear Glass diffuser, it offers clear illumination. Choose from white, black, or customize the finish. With 24 and 36-degree beam angles and optional adjustments, Ciana Prime SQ provides versatile lighting at 2700K to 6500K. Illuminate your space with style and precision.

### Related Family & Dimension

Rated Power	10W
Length (mm)	133
Width (mm)	71
Height (mm)	103
Rated Power	20W
Length (mm)	119
Width (mm)	100
Height (mm)	162

For More Details Scan QR Code



## REMI | 98030.000

RECESSED ADJUSTABLE TRIMLESS DOWNLIGHT



IP40 CRI≥90 50,000 Hrs | LM80 | B10 RoHS

Introducing Remi, a sleek luminaire crafted from die-cast aluminium, powered by Cree. Its optic lens diffuser ensures optimal light dispersion. Customize the body finish in white, black, or your preferred choice. Explore color temperatures from 2700K to 6500K, as Remi seamlessly combines style and functionality in a compact design.

### Related Family & Dimension

Rated Power	12W
Length (mm)	115
Width (mm)	185
Height (mm)	95
Rated Power	2 X 12W
Length (mm)	190
Width (mm)	185
Height (mm)	112

For More Details Scan QR Code



## ERATO | 91610.000

RECESSED ADJUSTABLE TRIMLESS DOWNLIGHT



IP40 CRI≥90 50,000 Hrs | LM80 | B10 RoHS

Introducing "Erato," our Die Cast Aluminium LED downlight, powered by Samsung. Featuring an Anodized Aluminium reflector and Clear diffuser, Erato offers customizable lighting in white, black, or your choice. With a focused 36-degree beam angle and optional adjustments, Erato provides versatile illumination at color temperatures from 2700K to 6500K. Illuminate with style and precision.

### Related Family & Dimension

Rated Power	12W
Length (mm)	103
Width (mm)	103
Height (mm)	85

For More Details Scan QR Code



## ZARA | 91650.000

RECESSED ADJUSTABLE TRIMLESS DOWNLIGHT




IP40 CRI≥90 50,000 Hrs | LM80 | B10 RoHS

Introducing "Zara," our Die Cast Aluminium LED downlight powered by Samsung. Clear and customizable, with an Anodized Aluminium reflector and Clear diffuser. Choose white, black, or customize the finish. Enjoy a focused 36-degree beam angle and color temperatures from 2700K to 6500K for versatile illumination.

### Related Family & Dimension

Rated Power	15W
Length (mm)	123
Width (mm)	140
Height (mm)	123
Rated Power	2 X 15W
Length (mm)	265
Width (mm)	140
Height (mm)	155

For More Details Scan QR Code



## DENO | 95920.000

RECESSED RETRACTABLE TRIM/TRIMLESS DOWNLIGHT



IP40 CRI≥90 50,000 Hrs | LM80 | B10 RoHS

Introducing “Deno,” our Die Cast Aluminium LED downlight, powered by Samsung for reliable performance. With an Anodized Aluminium reflector and Clear diffuser, Deno offers customizable lighting in white, black, or your choice. Choose from beam angles of 15, 24, 38, and 50 degrees, with optional adjustments. Deno provides versatile illumination at color temperatures from 2700K to 6500K. Illuminate with precision and style.

### Related Family & Dimension

Rated Power	20W
Length (mm)	146
Width (mm)	146
Height (mm)	148


Rated Power	2 X 20W
Length (mm)	265.5
Width (mm)	146
Height (mm)	148

For More Details Scan QR Code



## TRYLAC | 93260.000

RECESSED TRIMLESS DOWNLIGHT

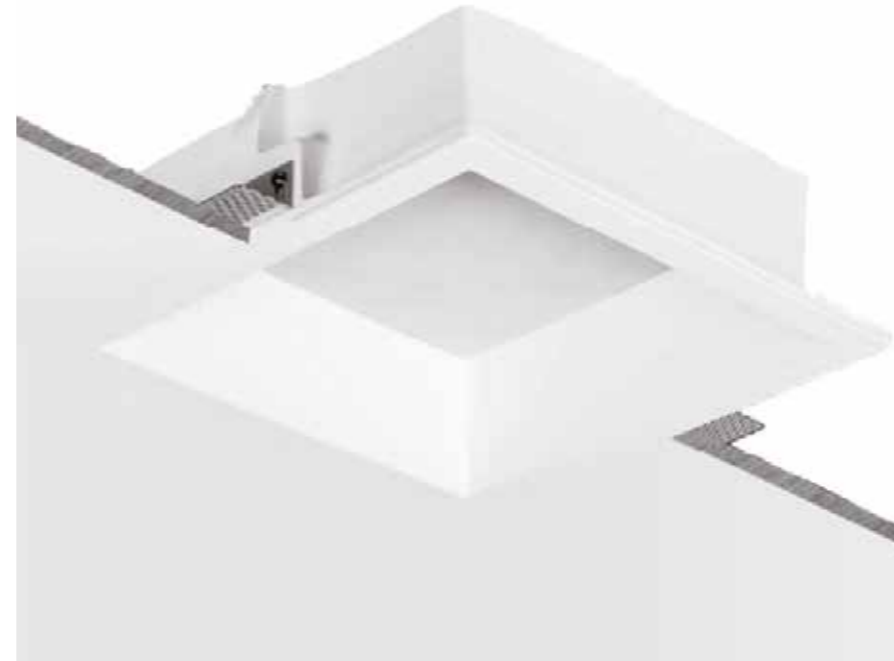

IP44 CRI≥90 UGR<19 50,000 Hrs | LM80 | B10

Introducing “Trylac,” our Die Cast Aluminium LED downlight, powered by Samsung. With an Opal diffuser and customizable finish in white, black, or your choice, Trylac offers soft and ambient illumination. The 90-degree beam angle, with optional adjustments, provides versatile lighting. Choose color temperatures from 2700K to 6500K for the perfect ambiance. Illuminate your space with Trylac’s sleek design and reliable performance.

### Related Family & Dimension

Rated Power	24W
W X L - H (mm)	170 X 170 - 55
Surface Cutout (MM)	156 X 156

For More Details Scan QR Code



## BRENTA | 91690.000

RECESSED DOWNLIGHT



IP40 50,000 Hrs | LM80 | B10 CRI≥90 UGR<19

Introducing “Brenta,” our Die Cast Aluminium LED downlight, powered by Samsung or Epistar for reliable performance. The Opal diffuser ensures a soft, ambient glow. Choose from white, black, or customize the finish to complement your space. With a broad 90-degree beam angle and optional adjustments, Brenta provides versatile lighting. Select a color temperature between 2700K to 6500K for the perfect ambiance.

### Related Family & Dimension

Rated Power	20W
WXW-H (mm)	190 X 190-55
Surface Cutout (mm)	158 X 158

For More Details Scan QR Code



## ARTERIALS SQ | 91240.000

RECESSED DOWNLIGHT



IP44 | CRI≥90 | 50,000 Hrs | LM80 | B10 | RoHS

Introducing “Arterials SQ,” our Die Cast Aluminium LED downlight. Powered by a Cree chip, it features an Anodized Aluminium reflector and Clear Glass diffuser for refined lighting. Customize the body finish in white, black, or your preferred option. With beam angles of 15, 30, and 45 degrees, and options available on request. Choose a color temperature from 2700K to 6500K for the perfect lighting ambience.

### Related Family & Dimension

Rated Power 15W  
WXW-H (mm) 140 X 140 - 88  
Surface Cutout (mm) 120 X 120

Rated Power 30W  
WXW-H (mm) 175 X 175 - 100  
Surface Cutout (mm) 155 X 155

Rated Power 40W  
WXW-H (mm) 195 X 195 - 105  
Surface Cutout (mm) 175 X 175

For More Details Scan QR Code



## SONIC PRIME | 96910.000

RECESSED ADJUSTABLE DOWNLIGHT



IP40 | CRI≥90 | 50,000 Hrs | LM80 | B10 | RoHS

“Sonic Prime” - Powered by Cree, this luminaire features Die Cast Aluminium construction, Clear Glass diffuser, and customizable finishes in white or black. With a 36-degree beam angle and a CCT range of 2700K to 6500K, it combines style with efficient lighting.

### Related Family & Dimension

Rated Power 15W  
W X W-H (mm) 105 X 105 - 110  
Surface Cutout (mm) 95 X 95

Rated Power 20W  
W X W-H (mm) 105 X 105 - 135  
Surface Cutout (mm) 95 X 95

Rated Power 2 X 15W  
WXW-H (mm) 105 X 205 - 135  
Surface Cutout (mm) 160 X 95

For More Details Scan QR Code



## PHOTINE PLUS | 98510.000

RECESSED ADJUSTABLE DOWNLIGHT



IP40 | CRI≥90 | 50,000 Hrs | LM80 | B10 | RoHS

Introducing “Photine Plus,” our Cree-powered Die Cast Aluminium LED downlight. With an Anodized Aluminium reflector and Clear Glass diffuser, Photine Plus delivers clear illumination. Choose from white, black, or customizable finishes. Opt for the 36-degree beam angle, with optional adjustments available. Photine Plus provides versatile lighting at color temperatures from 2700K to 6500K. Illuminate your space with precision and style.


### Related Family & Dimension

Rated Power 12W  
W X W - H(mm) 116 X 116 - 123  
Surface Cutout (mm) 100 X 100

Rated Power 15W  
W X W - H(mm) 116 X 116 - 123  
Surface Cutout (mm) 100 X 100

Rated Power 25W  
W X W - H(mm) 116 X 116 - 123  
Surface Cutout (mm) 100 X 100

For More Details Scan QR Code



## ASTO | 93770.000

RECESSED GIMBAL DOWNLIGHT



IP40 CRI≥90 50,000 Hrs | LM80 | B10 RoHS

Meet "Asto," our Cree-powered Die Cast Aluminium LED downlight. Anodized Aluminium reflector, Clear diffuser, customizable finish in white, black, or your choice. Opt for a focused 60-degree beam angle, with optional adjustments. Asto offers versatile lighting from 2700K to 6500K. Illuminate your space with style and functionality.

### Related Family & Dimension

Single Head	30W
Length (mm)	180
Width (mm)	180
Height (mm)	110
Double Head	2 X 30W
Length (mm)	180
Width (mm)	340
Height (mm)	110

For More Details Scan QR Code



## RUSLAN | 91840.000

RECESSED GIMBAL DOWNLIGHT



IP40 CRI≥90 50,000 Hrs | LM80 | B10 RoHS

Meet "Ruslan," our Cree-powered Die Cast Aluminium LED downlight. Anodized Aluminium reflector, Clear diffuser, customizable finish in white, black, or your choice. Opt for adjustable 36 and 60-degree beam angles. Ruslan offers versatile lighting from 2700K to 6500K. Illuminate your space with style and functionality.

### Related Family & Dimension

Single Head	50W
Length (mm)	164
Width (mm)	164
Height (mm)	145
Double Head	
Length (mm)	326
Width (mm)	164
Height (mm)	145
Triple Head	
Length (mm)	490
Width (mm)	164
Height (mm)	145

For More Details Scan QR Code



## ABNER | 95111.000

RECESSED GIMBAL DOWNLIGHT



IP44 CRI≥90 50,000 Hrs | LM80 | B10 RoHS

Meet "Abner," our Samsung-powered Die Cast Aluminium LED Ceiling Light. Anodized Aluminium reflector, Clear diffuser, customizable finish in white, black, or your choice. Opt for a broad 120-degree beam angle, with optional adjustments. Abner offers versatile lighting from 2700K to 6500K. Illuminate your space with style and functionality.

### Related Family & Dimension

Rated Power	15W
Length (mm)	207
Width (mm)	207
Height (mm)	105
Rated Power	2 X 15W
Length (mm)	355
Width (mm)	207
Height (mm)	105
Rated Power	3 X 15W
Length (mm)	500
Width (mm)	207
Height (mm)	105

For More Details Scan QR Code



## OPTON | 96170.000

RECESSED RETRACTABLE DOWNLIGHT



IP40 CRI≥90 50,000 Hrs | LM80 | B10 RoHS

Introducing "Opton," our Cree-powered Die Cast Aluminium LED downlight. With an Anodized Aluminium reflector and Clear Glass diffuser, Opton provides clear illumination. Choose from white, black, or customizable finishes. Opt for beam angles of 21, 34, and 51 degrees, with optional adjustments. Opton delivers versatile lighting at color temperatures from 2700K to 6500K. Illuminate with precision and style.

### Related Family & Dimension

Rated Power	34W
WXW-H(mm)	145X145 - 290
Diameter (MM)	95
Rated Power	2 X 34W
WXW-H(mm)	145X280 - 290
Diameter (MM)	95
Rated Power	3 X 34W
WXW-H(mm)	145X495 - 290
Diameter (MM)	95

For More Details Scan QR Code



## ZARA PLUS | 96300.000

RECESSED RETRACTABLE DOWNLIGHT



IP40 CRI≥90 50,000 Hrs | LM80 | B10 RoHS

Meet "Zara Plus," our Die Cast Aluminium LED Spotlight, powered by Samsung. With a sleek optic lens, Zara Plus offers customizable illumination in white, black, or your choice. Choose from 24, 36, or 60-degree beam angles and request custom options. Achieve the perfect ambiance with color temperatures from 2700K to 6500K. Illuminate with style and simplicity.

### Related Family & Dimension

Rated Power	20W
W X L-H(mm)	130X240 - 100
Rated Power	25W
W X L-H(mm)	130X240 - 100

For More Details Scan QR Code



## ELENA | 99870.000

RECESSED RETRACTABLE DOWNLIGHT



IP40 CRI≥90 50,000 Hrs | LM80 | B10 RoHS

Introducing "Elena," our Cree-powered Die Cast Aluminium LED downlight. With an optic lens, Elena offers clear illumination in white, black, or your choice. Choose a 36-degree beam angle, with options available. Elena delivers versatile lighting at color temperatures from 2700K to 6500K. Illuminate with style and precision.

### Related Family & Dimension

Rated Power	40W
Diameter (mm)	156
Height (mm)	224

For More Details Scan QR Code



## LATINUS | 91450.000

RECESSED RETRACTABLE DOWNLIGHT



IP40 CRI≥90 50,000 Hrs | LM80 | B10 RoHS

Introducing “Latinus,” our Cree-powered Die Cast Aluminium LED downlight. With an Anodized Aluminium reflector and Clear Glass diffuser, Latinus offers clear illumination. Choose from white, black, or customizable finishes. Opt for the 24 or 36-degree beam angle, with optional adjustments available. Latinus provides versatile lighting at color temperatures from 2700K to 6500K. Illuminate with precision and style.

### Related Family & Dimension

Rated Power	30W
Diameter (mm)	190
Height (mm)	165
Surface Cutout (mm)	172

For More Details Scan QR Code



## MARTINO | 91270.000

RECESSED ADJUSTABLE DOWNLIGHT



IP40 CRI≥90 50,000 Hrs | LM80 | B10 RoHS

Introducing “Martino,” our Cree-powered Die Cast Aluminium LED downlight. With an Anodized Aluminium reflector, optic lens and Clear Glass diffuser, Martino delivers clear illumination. Choose from white, black, or customizable finishes. Opt for the 36-degree beam angle, with optional adjustments available. Martino provides versatile lighting at color temperatures from 2700K to 6500K. Illuminate with precision and style.

### Related Family & Dimension

Rated Power	15W
Diameter (mm)	120
Height (mm)	90
Surface Cutout (mm)	100
Rated Power	20W
Diameter (mm)	120
Height (mm)	90
Surface Cutout (mm)	100

For More Details Scan QR Code



## TESTO AD | 91130.000

RECESSED 360° ADJUSTABLE DOWNLIGHT



IP40 CRI≥90 50,000 Hrs | LM80 | B10 RoHS

Introducing “Testo,” our Cree-powered Die Cast Aluminium LED downlight. Featuring an Anodized Aluminium reflector and Clear Glass diffuser, Testo offers clear illumination in white, black, or customizable finishes. Choose a 36-degree beam angle with optional adjustments. Testo provides versatile lighting at color temperatures from 2700K to 6500K. Illuminate your space with precision and style.

### Related Family & Dimension

Rated Power	24W
Diameter (mm)	172
Height (mm)	119
Surface Cutout (mm)	150
Rated Power	45W
Diameter (mm)	172
Height (mm)	119
Surface Cutout (mm)	150

For More Details Scan QR Code



## ORDI | 93780.000

RECESSED ADJUSTABLE DOWNLIGHT



IP40 CRI≥90 50,000 Hrs | LM80 | B10 RoHS

Introducing “Ordi,” our Cree-powered Die Cast Aluminium LED downlight. Featuring an Anodized Aluminium reflector and Optic Lens diffuser, Ordi offers precise illumination. Choose from white, black, or customizable finishes. Opt for the 36-degree beam angle, with optional adjustments. Ordi provides versatile lighting at color temperatures from 2700K to 6500K. Illuminate your space with precision and style.

### Related Family & Dimension

Rated Power	36W
D-H (mm)	154-105
Surface Cutout (mm)	138
Rated Power	2 X 36W
L - W-H (mm)	310 -168-105
Surface Cutout (mm)	282 - 150

For More Details Scan QR Code



## NIKKO | 91410.000

RECESSED DOWNLIGHT



IP40 CRI≥90 50,000 Hrs | LM80 | B10 RoHS

Meet “Nikko,” our Samsung-powered Die Cast Aluminium LED downlight. Opal diffuser, customizable finish in white, black, or your choice. Opt for a wide 90-degree. Nikko offers versatile lighting from 2700K to 6500K. Illuminate your space with elegance and functionality.

### Related Family & Dimension

Rated Power	5W
D-H (mm)	108-35
Surface Cutout (mm)	74
Rated Power	9W
D-H (mm)	138-38
Surface Cutout (mm)	112
Rated Power	12W
D-H (mm)	180-45
Surface Cutout (mm)	146
Rated Power	20W
D-H (mm)	190-45
Surface Cutout (mm)	160
Rated Power	30W
D-H (mm)	240-55
Surface Cutout (mm)	200

For More Details Scan QR Code



## JAZZU | 91250.000

RECESSED DOWNLIGHT



IP44 CRI≥85 30,000 Hrs | LM80 | B10 RoHS

Meet “Jazzu,” our Samsung-powered Die Cast Aluminium LED downlight. Opal diffuser, customizable finish in white, black, or your choice. Opt for a wide 90-degree. Jazzu offers versatile lighting from 2700K to 6500K. Illuminate your space with elegance and functionality.

### Related Family & Dimension

Rated Power	21W
D-H (mm)	200-70
Surface Cutout (MM)	158
Rated Power	31W
D-H (mm)	230-85
Surface Cutout (MM)	182

For More Details Scan QR Code



## ECOSLIM SQ | 91560.000

RECESSED PANEL LIGHT



IP44 CRI≥85 30,000 Hrs | LM80 | B10 RoHS

Meet “Ecoslim SQ,” our Samsung-powered Die Cast Aluminium LED downlight. Opal diffuser, customizable finish in white. Opt for a broad 120-degree beam angle. Ecoslim SQ offers versatile lighting from 2700K to 6500K. Illuminate your space with style and functionality.

### Related Family & Dimension

Rated Power	6W
WXW-H (mm)	121 X 121-19
Surface Cutout (mm)	97 X 97
Rated Power	12W
WXW-H (mm)	169 X 169-19
Surface Cutout (mm)	151 X 151
Rated Power	15W
WXW-H (mm)	190 X 190-19
Surface Cutout (mm)	170 X 170
Rated Power	16W
WXW-H (mm)	170 X 170-19
Surface Cutout (mm)	148 X 148
Rated Power	18W
WXW-H (mm)	220 X 220-19
Surface Cutout (mm)	202 X 202
Rated Power	24W
WXW-H (mm)	300 X 300-19
Surface Cutout (mm)	278 X 278

For More Details Scan QR Code



## ECOSLIM ROUND | 91540.000

RECESSED PANEL LIGHT



IP44 CRI≥85 UGR<19 30,000 Hrs | LM80 | B10

Meet “Ecoslim Round,” our Samsung-powered Die Cast Aluminium LED downlight. Opal diffuser, customizable finish in white. Opt for a broad 120-degree beam angle, with optional adjustments. Ecoslim Round offers versatile lighting from 2700K to 6500K. Illuminate your space with style and functionality.

### Related Family & Dimension

Rated Power	6W
D-H (mm)	122-17
Surface Cutout (mm)	102
Rated Power	12W
D-H (mm)	173-17
Surface Cutout (mm)	150
Rated Power	16W
D-H (mm)	173-17
Surface Cutout (mm)	150
Rated Power	18W
D-H (mm)	220-17
Surface Cutout (mm)	195
Rated Power	24W
D-H (mm)	300-22
Surface Cutout (mm)	276

For More Details Scan QR Code



## COMELY PLUS | 91280.000

RECESSED IP RATED DOWNLIGHT



IP65 CRI≥90 50,000 Hrs | LM80 | B10 RoHS

Introducing “Comely Plus,” our Luminus-powered Die Cast Aluminium LED downlight. Clear Glass diffuser, customizable finish in white. Opt for a 36-degree beam angle, with optional adjustments. Comely Plus offers versatile lighting from 2700K to 6500K. Illuminate with style and precision.

### Related Family & Dimension

Rated Power	60W
Diameter (mm)	225
Height (mm)	169
Surface Cutout (mm)	200

For More Details Scan QR Code



## NURA | 91420.000

RECESSED IP RATED DOWNLIGHT




IP65 CRI≥90 50,000 Hrs | LM80 | B10 RoHS

Introducing “Nura,” our Luminus-powered Die Cast Aluminium LED downlight. Clear Glass diffuser, customizable finish in white, black, or your choice. Choose a 36-degree beam angle with optional adjustments. Nura offers versatile lighting from 2700K to 6500K. Illuminate with style and precision.

### Related Family & Dimension

Rated Power	20W
D-H (mm)	146-137
Surface Cutout (mm)	126

For More Details Scan QR Code



## SASSO | 94150.000

RECESSED IP RATED DOWNLIGHT



IP65 CRI≥90 50,000 Hrs | LM80 | B10 RoHS

Introducing “Sasso,” our Samsung-powered Die Cast Aluminium LED downlight. With Opal diffuser and customizable finishes in white, black, or your choice, Sasso provides soft illumination. Enjoy a wide 90-degree beam angle. Sasso delivers versatile lighting from 2700K to 6500K. Illuminate your space with elegance.

### Related Family & Dimension

Rated Power	9W
D - H(mm)	103 - 58
Surface Cutout(MM)	90
Rated Power	15W
D - H(mm)	144 - 71
Surface Cutout(MM)	130

For More Details Scan QR Code



## RICCO PLUS | 98960.000

RECESSED IP RATED DOWNLIGHT



IP65 CRI≥90 50,000 Hrs | LM80 | B10 RoHS

Meet “Ricco Plus,” our Samsung-powered Die Cast Aluminium LED downlight. Opal diffuser, customizable finish in white, black, or your choice. Opt for a wide 90-degree beam angle. Ricco Plus offers versatile lighting from 2700K to 6500K. Illuminate your space with elegance and functionality.

### Related Family & Dimension

Rated Power	20W
D-H (mm)	178-55
Surface Cutout (mm)	160
Rated Power	22W
D-H (mm)	196-60
Surface Cutout (mm)	140
Rated Power	30W
D-H (mm)	246-65
Surface Cutout (mm)	220

For More Details Scan QR Code



# MINI SPOTLIGHTS



## INK MINI | 99190.000

RECESSED ADJUSTABLE MINI SPOTLIGHT



IP40 CRI≥90 50,000 Hrs | LM80 | B10 RoHS

Ink Mini features a Die Cast Aluminium construction, powered by Cree, with a diffuser optic lens, and honeycomb louvre options. Available in customizable white or black finishes, it provides a range of beam angles from 19 to 62 degrees. The color temperature can be adjusted from 2700K to 6500K.

### Related Family & Dimension

Rated Power	6W   8W
Diameter (mm)	40
Height (mm)	88
Surface Cutout (mm)	35

For More Details Scan QR Code



## TRACY WH MINI | 90190.000

RECESSED ADJUSTABLE MINI SPOTLIGHT



IP40 CRI≥90 50,000 Hrs | LM80 | B10 RoHS

Tracy WH Mini features a Die Cast Aluminium construction, powered by Cree, with a diffuser optic lens, and honeycomb louvre options. Available in customizable white or black finishes, it provides a range of beam angles from 19 to 62 degrees. The color temperature can be adjusted from 2700K to 6500K.

### Related Family & Dimension

Rated Power	8W
Diameter (mm)	50
Height (mm)	102
Surface Cutout (mm)	45

For More Details Scan QR Code



## TARGET MINI | 99180.000

RECESSED ADJUSTABLE MINI SPOTLIGHT



IP40 CRI≥90 50,000 Hrs | LM80 | B10 RoHS

Target Mini features a Die Cast Aluminium construction, powered by Cree, with a diffuser optic lens, and honeycomb louvre options. Available in customizable white or black finishes, it provides a range of beam angles from 19 to 62 degrees. The color temperature can be adjusted from 2700K to 6500K.

### Related Family & Dimension

Rated Power	6W
Diameter (mm)	48
Height (mm)	67
Surface Cutout (mm)	43
Rated Power	8W
Diameter (mm)	48
Height (mm)	88
Surface Cutout (mm)	43

For More Details Scan QR Code



## TRACY MINI ADJ | 90160.000

RECESSED ADJUSTABLE MINI SPOTLIGHT



IP40 CRI≥90 50,000 Hrs | LM80 | B10 RoHS

Tracy Mini Adj features a Die Cast Aluminium construction, powered by Cree, with a diffuser optic lens, and honeycomb louvre options. Available in customizable white or black finishes, it provides a range of beam angles from 19 to 62 degrees. The color temperature can be adjusted from 2700K to 6500K.

### Related Family & Dimension

Rated Power	8W
Diameter (mm)	50
Height (mm)	102
Surface Cutout (mm)	45

For More Details Scan QR Code



## EYE MINI | 99220.000

RECESSED MINI SPOTLIGHT



IP40 CRI≥90 50,000 Hrs | LM80 | B10 RoHS

Eye Mini features a Die Cast Aluminium construction, powered by Cree, with a diffuser optic lens, and honeycomb louvre options. Available in customizable white or black finishes, it provides a range of beam angles from 19 to 62 degrees. The color temperature can be adjusted from 2700K to 6500K.

### Related Family & Dimension

Rated Power	6W
Diameter (mm)	41 & 43
Height (mm)	77 & 77
Surface Cutout (mm)	37 & 38
Rated Power	8W
Diameter (mm)	41 & 43
Height (mm)	97 & 97
Surface Cutout (mm)	37 & 38

For More Details Scan QR Code



## TRACY MINI | 90160.000

RECESSED MINI SPOTLIGHT



IP40 CRI≥90 50,000 Hrs | LM80 | B10 RoHS

Tracy Mini features a Die Cast Aluminium construction, powered by Cree, with a diffuser optic lens, and honeycomb louvre options. Available in customizable white or black finishes, it provides a range of beam angles from 19 to 62 degrees. The color temperature can be adjusted from 2700K to 6500K.

### Related Family & Dimension

Rated Power	8W
Diameter (mm)	45
Height (mm)	80
Surface Cutout (mm)	40

For More Details Scan QR Code



## NANO MINI | 96700.000

RECESSED MINI SPOTLIGHT



IP40 CRI≥90 50,000 Hrs | LM80 | B10 RoHS

Nano Mini features a Die Cast Aluminium construction, powered by Cree, with a diffuser optic lens, and honeycomb louvre options. Available in customizable white or black finishes, it provides a range of beam angles from 19 to 62 degrees. The color temperature can be adjusted from 2700K to 6500K.

### Related Family & Dimension

Rated Power	6W   8W
Diameter (mm)	35
Height (mm)	47
Surface Cutout (mm)	30

For More Details Scan QR Code



## NANO WH MINI | 98490.000

RECESSED MINI SPOTLIGHT



IP40 CRI≥90 50,000 Hrs | LM80 | B10 RoHS

Nano WH Mini features a Die Cast Aluminium construction, powered by Cree, with a diffuser optic lens, and honeycomb louvre options. Available in customizable white or black finishes, it provides a range of beam angles from 19 to 62 degrees. The color temperature can be adjusted from 2700K to 6500K.

### Related Family & Dimension

Rated Power	6W   8W
Diameter (mm)	40
Height (mm)	88
Surface Cutout (mm)	35

For More Details Scan QR Code



## SARCO | 98020.000

RECESSED SPOTLIGHT



IP40 CRI≥90 50,000 Hrs | LM80 | B10 RoHS

Meet Sarco, the Aluminium Mini Spotlight powered by Osram. Featuring a Polycarbonate diffuser and optic lens, Sarco is compact and versatile. Available in white, black, or custom finishes, with an optional 15-degree beam angle. Its CCT ranges from 2700K to 6500K, providing precise illumination in a sleek design.

### Related Family & Dimension

Rated Power	1W
Diameter (mm)	23
Height (mm)	29
Surface Cutout (mm)	20

For More Details Scan QR Code



## WALT SPOT | 98830.000

RECESSED ANTI GLARE MINI SPOTLIGHT



IP54 CRI≥90 50,000 Hrs | LM80 | B10 RoHS

Meet Walt Spot, a die-cast aluminium spotlight powered by Citizen. Its deep anti-glare anodized reflector and optic lens diffuser create a precise 36-degree beam. Choose from white, black, or customizable finishes. With a color temperature range of 2700K to 6500K, Walt Spot blends style seamlessly with functionality.

### Related Family & Dimension

Rated Power	6W
Diameter (mm)	50
Height (mm)	72
Surface Cutout (mm)	40

For More Details Scan QR Code



## LONNA | 92040.000

RECESSED ADJUSTABLE MINI SPOTLIGHT



IP40 CRI≥90 50,000 Hrs | LM80 | B10 RoHS

“Lonna” - Cree-powered luminaire with Die Cast Aluminium body with Optic Lens diffuser. Customizable finishes, 36-degree beam angle, and 2700K to 6500K color temperature. Elevate your space with style and dynamic lighting.

### Related Family & Dimension

Rated Power	3W
Diameter (mm)	26
Height (mm)	40
Surface Cutout (mm)	30
Rated Power	2 X 3W
Diameter (mm)	26
Height (mm)	40
Surface Cutout (mm)	30 X 60
Rated Power	8W
Diameter (mm)	40
Height (mm)	70
Surface Cutout (mm)	37

For More Details Scan QR Code



## PLATO | 91300.000

RECESSED ADJUSTABLE SPOTLIGHT



IP40 CRI≥90 50,000 Hrs | LM80 | B10 RoHS

Meet “Plato,” our Cree-powered LED Spotlight. Anodized Aluminium reflector, Clear/frosted Glass diffuser, customizable finish in white, black, or your choice. Opt for a versatile 36-degree beam angle. Plato provides versatile lighting from 2700K to 6500K, effortlessly blending style with functionality. Illuminate your space with the sleek and functional design of Plato.

### Related Family & Dimension

Rated Power	4W
Diameter (mm)	53
Height (mm)	23
Surface Cutout (mm)	41

For More Details Scan QR Code





**SPOTLIGHTS**

## VAVO | 97480.000

RECESSED TRIMLESS SPOTLIGHT



IP40 CRI≥90 50,000 Hrs | LM80 | B10 RoHS

Meet Vavo, the Aluminium Trimless Spotlight powered by Cree with a Clear Glass diffuser and Anodized Aluminium reflector. Available in white, black, or custom finishes, with an optional 24-degree beam angle. Vavo's CCT ranges from 2700K to 6500K, providing precise and customizable lighting in a sleek design.

### Related Family & Dimension

Rated Power	5W
Length (mm)	108
Diameter (mm)	60
Height (mm)	95
Rated Power	10W
Length (mm)	132
Diameter (mm)	82
Height (mm)	105

For More Details Scan QR Code



## CENTRS | 97860.000

RECESSED TRIMLESS RETRACTABLE SPOTLIGHT



IP44 CRI≥90 50,000 Hrs | LM80 | B10 RoHS

Introducing "Centrs," our Samsung-powered Die Cast Aluminium LED Spotlight. With Opal diffuser and customizable finish in white, black, or your choice, Centrs offers focused illumination at a 36-degree beam angle. Choose color temperatures from 2700K to 6500K for versatile lighting. Illuminate your space with Centrs' sleek design and precision.

### Related Family & Dimension

Rated Power	8W
Diameter(mm)	28
Height(mm)	400
Options	
Height(mm)	530
Height(mm)	600
Height(mm)	800
Height(mm)	1200

For More Details Scan QR Code



## LIUZ | 91400.000

RECESSED SLIM TRIM SPOTLIGHT



IP40 CRI≥90 50,000 Hrs | LM80 | B10 RoHS

"Liuz" - Crafted with Die Cast Aluminium and powered by Epistar, this luminaire boasts a optic lens. Available in white, black, and customizable finishes, it offers a beam angle of 24 and 36 degrees. The color temperature ranges from 2700K to 6500K, ensuring versatile illumination.

### Related Family & Dimension

Rated Power	9W
Diameter (mm)	99
Height (mm)	108
Surface Cutout	93
Rated Power	10W
Diameter (mm)	99
Height (mm)	108
Surface Cutout	93
Rated Power	12W
Diameter (mm)	99
Height (mm)	108
Surface Cutout	93

For More Details Scan QR Code



## TESTO SPOT | 91110.000

RECESSED SPOTLIGHT



IP40 CRI≥90 50,000 Hrs | LM80 | B10 RoHS

Testo Spot features a robust Die Cast Aluminium body, powered by Cree, with a sleek Anodized Aluminium reflector. Its versatile design includes both Clear and Frosted Glass diffusers, offering customizable white or black finishes. The spotlight's focused beam angle of 24 degree, with optional variations, and a color temperature range from 2700K to 6500K, make Testo Spot a versatile and stylish lighting solution.

### Related Family & Dimension

Rated Power	7W
Diameter (mm)	92
Height (mm)	62
Surface Cutout	80

For More Details Scan QR Code



## FREYA | 94650.000

RECESSED SPOTLIGHT



IP40 CRI≥90 50,000 Hrs | LM80 | B10 RoHS

Freya boasts a Die Cast Aluminium body, powered by Cree, and adorned with Anodized Aluminium. The Clear Glass diffuser complements its customizable white or black finish. With a versatile beam angle of 36 degree and optional variations, Freya offers a color temperature range from 2700K to 6500K.

### Related Family & Dimension

Rated Power	10W
Diameter (mm)	94
Height (mm)	40
Surface Cutout (mm)	72

For More Details Scan QR Code



## LEVA FA | 94350.000

RECESSED ADJUSTABLE SPOTLIGHT



IP40 CRI≥90 50,000 Hrs | LM80 | B10 RoHS

Introducing "Leva FA," our Die Cast Aluminium LED Spotlight. Powered by Cree or Luminus for reliable performance, it features a Mirrored Chrome reflector and Textured Convex lens. The body comes in white, black, or a customizable finish. Choose a 36-degree beam angle, with options available. Leva FA offers versatile lighting at color temperatures from 2700K to 6500K. Illuminate with precision and style.

### Related Family & Dimension

Rated Power	9W
Diameter(mm)	87
Height (mm)	84

For More Details Scan QR Code



## ZOLA | 91050.000

RECESSED ADJUSTABLE SPOTLIGHT



IP40 CRI≥90 50,000 Hrs | LM80 | B10 RoHS

“Zola” - A Citizen-powered LED Spotlight with Die Cast Aluminium body, Anodized Aluminium reflector, and Clear Glass diffuser. Customizable in white, black, or your choice. Features a focused 40-degree beam angle, with options available. CCT ranges from 2700K to 6500K, providing stylish and adjustable lighting.

### Related Family & Dimension

Rated Power	6W
Length (mm)	90
Width (mm)	62.7
Height (mm)	68-80

Rated Power	9W
Length (mm)	105
Width (mm)	72.7
Height (mm)	83-95

For More Details Scan QR Code



## LAXO | 91310.000

RECESSED ADJUSTABLE SPOTLIGHT



IP40 CRI≥90 50,000 Hrs | LM80 | B10 RoHS

Introducing “Laxo,” our Cree-powered LED Spotlight with an Anodized Aluminium reflector and Clear Glass diffuser. This spotlight, available in white, black, or customizable finishes, offers versatile lighting with a 36-degree beam angle. Laxo is designed to seamlessly integrate into any space, providing adjustable illumination from 2700K to 6500K. Elevate your ambiance with the stylish and functional design of Laxo.

### Related Family & Dimension

Rated Power	5W
Diameter (mm)	85
Height (mm)	37
Surface Cutout (mm)	71

For More Details Scan QR Code



## LEGERO | 91520.000

RECESSED ADJUSTABLE SPOTLIGHT



IP54 CRI≥90 50,000 Hrs | LM80 | B10 RoHS

Meet Legero, the Aluminium Spotlight powered by Luminus. With an Optics Lens diffuser and customizable white, black, or custom finishes, Legero offers focused illumination. Choose from optional 20 and 24-degree beam angles. Its CCT ranges from 2700K to 6500K, providing versatile lighting in a sleek design.

### Related Family & Dimension

Rated Power	6W
Diameter (mm)	60
Height (mm)	61.7

Rated Power	12W
Diameter (mm)	83
Height (mm)	83.8

For More Details Scan QR Code



## OVID | 91320.000

RECESSED ADJUSTABLE SPOTLIGHT



IP40 CRI≥90 50,000 Hrs | LM80 | B10 RoHS

Meet "Ovid," our Cree-powered LED Spotlight. Anodized Aluminium reflector, Clear Glass diffuser, customizable finish in white, black, or your choice. Opt for a precise 24 or 36-degree beam angle. Ovid provides versatile lighting from 2700K to 6500K, effortlessly blending style with functionality. Illuminate your space with the modern and functional design of Ovid.

### Related Family & Dimension

Rated Power	7W
Diameter (mm)	100
Height (mm)	40
Surface Cutout (mm)	85

Rated Power	9W
Diameter (mm)	100
Height (mm)	40
Surface Cutout (mm)	85

For More Details Scan QR Code



## LINOLITE | 91290.000

RECESSED ADJUSTABLE SPOTLIGHT



IP40 CRI≥90 50,000 Hrs | LM80 | B10 RoHS

Meet "Linolite," our Samsung-powered LED Spotlight. Anodized Aluminium reflector, semi frosted diffuser, customizable finish in white, black, or your choice. Opt for a versatile 36-degree beam angle. Linolite provides adjustable lighting from 2700K to 6500K, effortlessly merging style with functionality. Illuminate your space with the sleek design of Linolite.

### Related Family & Dimension

Rated Power	10W
Diameter (mm)	85
Height (mm)	62
Surface Cutout (mm)	65

For More Details Scan QR Code



## EUROSPOT | 91520.000

RECESSED ADJUSTABLE SPOTLIGHT



IP40 CRI≥90 50,000 Hrs | LM80 | B10 RoHS

"Eurospot" - A Cree-powered LED Spotlight with a Die Cast Aluminium body, Anodized Aluminium reflector, and Clear Glass diffuser. Customize in white, black, or your choice. Opt for a versatile 36-degree beam angle, offering adjustable lighting from 2700K to 6500K. Illuminate your space with Eurospot's modern design and powerful performance.

### Related Family & Dimension

Rated Power	10W
Diameter (mm)	85
Height (mm)	56
Surface Cutout (mm)	71

For More Details Scan QR Code



## COMELY | 91280.000

RECESSED ADJUSTABLE SPOTLIGHT



IP40 CRI≥90 50,000 Hrs | LM80 | B10 RoHS

Meet "Comely," our Cree-powered LED Spotlight. Anodized Aluminium reflector, Clear Glass diffuser, customizable finish in white, black, or your choice. Opt for a clear 45-degree beam angle. Comely provides versatile lighting from 2700K to 6500K, effortlessly blending style with functionality. Illuminate your space with the modern and elegant design of Comely.

### Related Family & Dimension

Rated Power  
10W / 12W / 15W  
Diameter (mm) 104  
Height (mm) 94  
Surface Cutout (mm) 92

For More Details Scan QR Code



## ELEA PRO | 91350.000

RECESSED ADJUSTABLE SPOTLIGHT



IP40 CRI≥90 50,000 Hrs | LM80 | B10 RoHS

Meet "Elea Pro," our Cree-powered LED Spotlight. Anodized Aluminium reflector, Clear Glass diffuser, customizable finish in white, black, or your choice. Opt for a versatile 36-degree beam angle. Elea Pro provides adjustable lighting from 2700K to 6500K, effortlessly blending style with functionality. Illuminate your space with the sleek and functional design of Elea Pro.

### Related Family & Dimension

Rated Power 8W | 10W  
Diameter (mm) 75  
Height (mm) 70  
Surface Cutout (mm) 60

For More Details Scan QR Code



## IVANA ROUND | 97990.000

RECESSED ADJUSTABLE SLIM TRIM SPOTLIGHT



IP44 CRI≥90 50,000 Hrs | LM80 | B10 RoHS

"Ivana Round" - A sleek luminaire powered by Cree, featuring Die Cast Aluminium construction, Optic Lens diffuser. Choose from white, black, or customizable finishes, with a focused 30-degree beam angle. CCT ranges from 2700K to 6500K, offering versatile and efficient lighting.

### Related Family & Dimension

Rated Power 12W  
Diameter (mm) 90  
Height (mm) 90  
Surface Cutout (mm) 86

For More Details Scan QR Code



## ARIN | 91390.000

RECESSED RETRACTABLE SPOTLIGHT



IP40 CRI≥90 50,000 Hrs | LM80 | B10 RoHS

Meet "Arin," our Samsung-powered LED Spotlight. Anodized Aluminium reflector, Clear Glass diffuser, customizable finish in white, black, or your choice. Opt for a versatile 24 or expansive 60-degree beam angle. Arin provides versatile lighting from 2700K to 6500K, effortlessly blending style with functionality. Illuminate your space with the modern and sleek design of Arin.

### Related Family & Dimension

Rated Power	10W
Diameter (mm)	90
Height (mm)	75
Surface Cutout (mm)	75

For More Details Scan QR Code



## ARIEL B | 97940.000

RECESSED RETRACTABLE SLIM TRIM SPOTLIGHT



IP44 CRI≥90 50,000 Hrs | LM80 | B10 RoHS

"Ariel B" - A sleek, Citizen-powered luminaire with Die Cast Aluminium body, optic lens diffuser. Customizable in white or black, it boasts beam angles of 24 and 36 degrees, with CCT ranging from 2700K to 6500K. Illuminate your space with Ariel B's modern design and versatile lighting options.

### Related Family & Dimension

Rated Power	8W
Length (mm)	98
Diameter (MM)	60
Height (mm)	63

For More Details Scan QR Code



## WALT PRIME | 98830.000

RECESSED ADJUSTABLE ANTI GLARE SLIM TRIM SPOTLIGHT



IP54 CRI≥90 50,000 Hrs | LM80 | B10 RoHS

"Walt Prime" - Die Cast Aluminium, powered by Cree or Citizen, boasts an Anti-Glare Anodized Aluminium Reflector, Optic Lens, and Honeycomb Louvre Diffuser. Customizable in white or black, it delivers a focused beam (24-36 degrees) with a color temperature range of 2700K to 6500K.

### Related Family & Dimension


Rated Power	8W
Diameter (mm)	85
Height (mm)	90
Surface Cutout	75

For More Details Scan QR Code



## LIUQ | 95940.000

RECESSED SPOTLIGHT

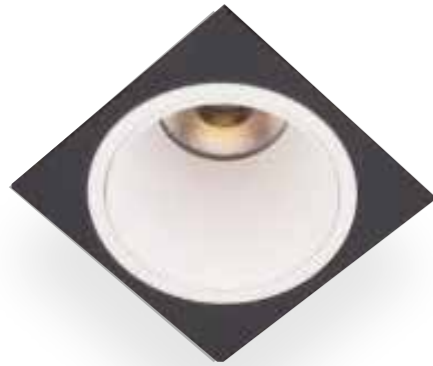


IP54 CRI≥90 50,000 Hrs | LM80 | B10 RoHS

Introducing "Liuq," our Die Cast Aluminium LED Spotlight, powered by Citizen. With a Black Louvre PC reflector and PMMA Lens, it delivers precise lighting. Choose from white, black, or a customizable finish to suit your style. The adjustable beam angles (15, 24, 36, and 55 degree) and optional requests offer flexibility. Liuq provides a color temperature range from 2700K to 6500K, ensuring the perfect illumination for any setting.

### Related Family & Dimension

Rated Power	10W   13W
A X A - B (mm)	85X85-94
Surface Cutout (mm)	68 X 68

For More Details Scan QR Code



## ABLAZE | 91600.000

RECESSED SPOTLIGHT



IP44 CRI≥90 50,000 Hrs | LM80 | B10 RoHS

Introducing Ablaze, a sleek die-cast aluminium luminaire powered by Samsung. Its opal diffuser ensures a soft glow, while the customizable body comes in white, black, or your preferred finish. With a focused 36-degree beam angle and optional customization, Ablaze adapts to your lighting needs. Explore the color spectrum from 2700K to 6500K, as Ablaze seamlessly combines form and function.

### Related Family & Dimension

Rated Power	10W
Length (mm)	90
Width (mm)	90
Height (mm)	104
Surface Cutout (mm)	74

For More Details Scan QR Code



## SONIC | 91620.000

RECESSED ADJUSTABLE SPOTLIGHT



IP40 CRI≥90 50,000 Hrs | LM80 | B10 RoHS

"Sonic" - Powered by Cree, this luminaire features a Die Cast Aluminium body, Anodized Aluminium reflector, and Clear Glass diffuser. Customizable finishes, a 36-degree beam angle, and a color temperature range from 2700K to 6500K. Illuminate your space with sophistication and versatility.

### Related Family & Dimension

Rated Power	10W
Length(mm)	94
Width (mm)	94
Height (mm)	60
Rated Power	2 X 10W
Length(mm)	94
Width (mm)	175
Height (mm)	60

For More Details Scan QR Code



## IVANA SQ | 98000.000

RECESSED ADJUSTABLE SLIM TRIM SPOTLIGHT



IP44 CRI≥90 50,000 Hrs | LM80 | B10 RoHS

“Ivana SQ” - A sleek luminaire powered by Cree, featuring Die Cast Aluminium construction, Anodized Aluminium reflector, and Optical Lens diffuser. Choose from white, black, or customizable finishes, with a focused 30-degree beam angle. CCT ranges from 2700K to 6500K, offering versatile and efficient lighting.

### Related Family & Dimension

Rated Power	12W
Length (mm)	91
Width (mm)	91
Height (mm)	90
Surface Cutout (mm)	84 X 84

Rated Power	2 X 12W
Length (mm)	172
Width (mm)	91
Height (mm)	93
Surface Cutout (mm)	165 X 84

For More Details Scan QR Code



## ANIKO | 98240.000

RECESSED ADJUSTABLE ANTI GLARE SPOTLIGHT



IP40 CRI≥90 50,000 Hrs | LM80 | B10 RoHS

Meet “Aniko,” our Cree-powered LED Spotlight. Anodized Aluminium reflector, Honeycomb Louvre Diffuser, customizable finish in white, black, or your choice. Opt for unique 24 or 38-degree beam angles. Aniko offers versatile lighting from 2700K to 6500K, seamlessly blending style with functionality. Illuminate your space with the modern and distinctive design of Aniko.

### Related Family & Dimension


Rated Power	10W   13W
Length (mm)	94
Width (mm)	94
Height (mm)	65
Surface Cutout (mm)	76

For More Details Scan QR Code



## INCLINE | 94610.000

RECESSED LINEAR SPOTLIGHT

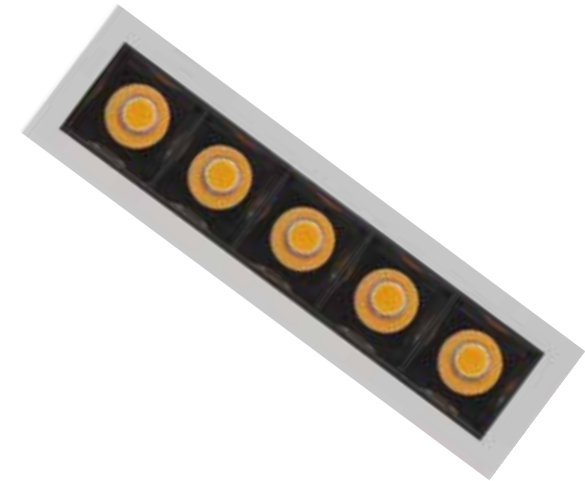

IP40 CRI≥90 50,000 Hrs | LM80 | B10 RoHS

Incline is a LED linear recessed spotlight, designed with an anti-glare feature, that offers high performance and longevity. This product emits high-intensity light to create a smooth atmosphere. Incline is versatile due to its range of sizes and reflectors. It's easy to assemble and features a stylish silky trim, adding a fashionable touch to the linear recessed spotlight.

### Related Family & Dimension

Rated Power	5 X 2W
Length (mm)	150
Width (mm)	46
Surface Cutout (mm)	33


Rated Power	10 X 2W
Length (mm)	280
Width (mm)	46
Surface Cutout (mm)	33

For More Details Scan QR Code



## INCLINE PRIME | 99780.000

RECESSED LINEAR SPOTLIGHT

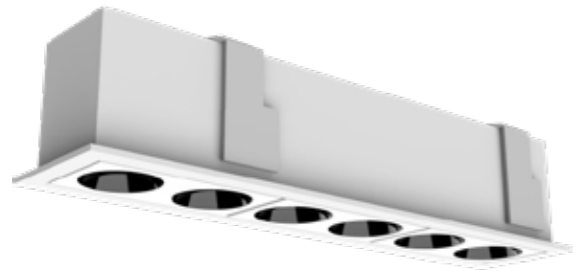

IP40 CRI≥90 50,000 Hrs | LM80 | B10 RoHS

Incline Prime is a LED linear recessed spotlight, designed with an anti-glare feature, that offers high performance and longevity. This product emits high-intensity light to create a smooth atmosphere. Incline Prime is versatile due to its range of sizes and reflectors. It's easy to assemble and features, adding a fashionable touch to the linear recessed spotlight.

### Related Family & Dimension

Rated Power	4W	Rated Power	36W
Length (mm)	80	Length (mm)	610
Width (mm)	46	Width (mm)	46
Height (mm)	60	Height (mm)	60

Rated Power	10W
Length (mm)	146
Width (mm)	46
Height (mm)	60

Rated Power	12W
Length (mm)	214
Width (mm)	46
Height (mm)	60

Rated Power	24W
Length (mm)	411
Width (mm)	46
Height (mm)	60

For More Details Scan QR Code



## INCLINE PRIME ADJ | 99780.000

RECESSED RETRACTABLE LINEAR SPOTLIGHT



IP40 CRI≥90 50,000 Hrs | LM80 | B10 RoHS

Incline Prime adj is a LED linear recessed spotlight, designed with an anti-glare feature, that offers high performance and longevity. This product emits high-intensity light to create a smooth atmosphere. Incline is versatile due to its range of sizes and reflectors. It's easy to assemble and features, adding a fashionable touch to the linear recessed spotlight.

### Related Family & Dimension

Rated Power	5 X 2W
Length (mm)	147
Width (mm)	45
Height (mm)	49

Rated Power	10 X 2W
Length (mm)	280
Width (mm)	45
Height (mm)	49

For More Details Scan QR Code



## AVALON | 94470.000

RECESSED ASYMMETRIC SPOTLIGHT



IP40 CRI≥90 50,000 Hrs | LM80 | B10 RoHS

Introducing Avalon, a die-cast aluminium spotlight powered by Cree. Available in white, black, or customizable finishes, Avalon offers a focused 36-degree beam angle with optional customization. With a color temperature range of 2700K to 6500K, it seamlessly combines style and functionality.

### Related Family & Dimension

Rated Power	10W
Diameter (mm)	164
Height (mm)	112
Surface Cutout (mm)	150

For More Details Scan QR Code



## ADELA | 98410.000

RECESSED ASYMMETRIC SPOTLIGHT



IP44 CRI≥90 50,000 Hrs | LM80 | B10 RoHS

Meet “Adela,” our Cree-powered LED Spotlight. Matte Black Aluminium reflector, Optic Lens diffuser, customizable finish in white, black, or your choice. Opt for precise 24 or 36-degree beam angles. Adela offers versatile lighting from 2700K to 6500K, effortlessly blending style with functionality. Illuminate your space with the modern and sleek design of Adela.

### Related Family & Dimension

Rated Power	10W   15W
Diameter (mm)	90
Height (mm)	108
Surface Cutout (mm)	74

For More Details Scan QR Code



## VISTRA | 94520.000

RECESSED ASYMMETRIC SPOTLIGHT



IP40 CRI≥90 50,000 Hrs | LM80 | B10 RoHS

Meet “Vistra,” our Luminus-powered LED Spotlight. Anodized Aluminium reflector, Frosted Glass diffuser, customizable finish in white, black, or your choice. Opt for a soft 30-degree beam angle. Vistra offers versatile lighting from 2700K to 6500K, effortlessly blending style with functionality. Illuminate your space with the modern and practical design of Vistra.

### Related Family & Dimension

Rated Power	10W
Diameter (mm)	80
Height (mm)	65

For More Details Scan QR Code



## SASHA | 98250.000

RECESSED ASYMMETRIC SPOTLIGHT



IP44 CRI≥90 50,000 Hrs | LM80 | B10 RoHS

Meet “Sasha,” our Luminus-powered LED Spotlight. Anodized Aluminium reflector, Frosted Glass diffuser, customizable finish in white, black, or your choice. Opt for a subtle 25-degree beam angle. Sasha offers versatile lighting from 2700K to 6500K, effortlessly blending style with functionality. Illuminate your space with the modern and practical design of Sasha.

### Related Family & Dimension

Rated Power	10W
Diameter (mm)	80
Height (mm)	62

For More Details Scan QR Code



## HAZEL | 98240.000

RECESSED ASYMMETRIC SPOTLIGHT



IP40 CRI≥90 50,000 Hrs | LM80 | B10 RoHS

Introducing “Hazel,” our Cree-powered LED Spotlight. Anodized Aluminium reflector, Prismatic Glass diffuser, customizable finish in white, black, or your choice. Opt for an adjustable 60-degree beam angle. Hazel provides versatile lighting from 2700K to 6500K, seamlessly merging aesthetics with functionality. Illuminate your space with the contemporary design of Hazel.

### Related Family & Dimension

Rated Power	10W
Diameter (mm)	80
Height (mm)	65

For More Details Scan QR Code



## LIUZ PLUS | 93080.000

RECESSED ASYMMETRIC SPOTLIGHT



IP40 CRI≥90 50,000 Hrs | LM80 | B10 RoHS

Meet “Liuz Plus,” our Luminus-powered LED Spotlight. Optic Lens diffuser, customizable finish in white, black, or your choice. Opt for a focused 30-degree beam angle. Liuz Plus offers versatile lighting from 2700K to 6500K, effortlessly combining style with functionality. Illuminate your space with the modern and practical design of Liuz Plus.

### Related Family & Dimension

Rated Power	12W
Diameter (mm)	103
Height (mm)	84

For More Details Scan QR Code



## RIO | 98880.000

RECESSED SLIM TRIM IP RATED MINI SPOTLIGHT



IP65 CRI≥90 50,000 Hrs | LM80 | B10 RoHS

Meet Rio, a die-cast aluminium luminaire powered by Epistar. Customize the body in white, black, or your preference. With a frosted prismatic glass diffuser, Rio adds sophistication. Opt for a focused 36-degree beam angle, with customization available. Explore color temperatures from 2700K to 6500K, effortlessly blending style and versatility.

### Related Family & Dimension

Rated Power	10W
Diameter (mm)	50
Height (mm)	70

For More Details Scan QR Code



## NIRO | 99030.000

RECESSED IP RATED SPOTLIGHT



IP65 CRI≥90 50,000 Hrs | LM80 | B10 RoHS

Introducing Niro, a die-cast aluminium luminaire powered by Cree. Customize the body finish in white, black, or your preference. With an anodized aluminium reflector and clear glass diffuser, Niro offers versatile style. Choose from beam angles of 24, 36, and 60 degrees, and explore color temperatures from 2700K to 6500K for a personalized touch.

### Related Family & Dimension

Rated Power	12W
Diameter (mm)	90
Height (mm)	52
Surface Cutout (mm)	72
Rated Power	15W
Diameter (mm)	110
Height (mm)	66
Surface Cutout (mm)	88

For More Details Scan QR Code



## VENTO | 98870.000

RECESSED IP RATED SPOTLIGHT



IP65 CRI≥90 50,000 Hrs | LM80 | B10 RoHS

Meet Vento, a die-cast aluminium luminaire powered by Cree. Customize the body in white, black, or your preference. With an anodized aluminium reflector and clear glass diffuser, Vento delivers a modern aesthetic. Opt for a focused 60-degree beam angle, with customization available. Explore color temperatures from 2700K to 6500K, seamlessly blending style and functionality.

### Related Family & Dimension

Rated Power	10W
Diameter (mm)	88
Height (mm)	88
Surface Cutout (mm)	68

For More Details Scan QR Code



## CRISTO | 98220.000

RECESSED FIRE RATED SPOTLIGHT



IP65 CRI≥90 50,000 Hrs | LM80 | B10 Fire Rated

“Cristo” features a Die Cast Aluminium body, powered by Cree. With an Optic Lens and Tempered Glass Diffuser, it offers a beam angle of 36 degrees, customizable in white or black, and fireproof. The color temperature ranges from 2700K to 6500K.

### Related Family & Dimension

Rated Power	10W
Diameter (mm)	88
Height (mm)	72
Surface Cutout (mm)	64

For More Details Scan QR Code



## NUWAN | 98210.000

RECESSED FIRE RATED SPOTLIGHT




IP65 | CRI≥90 | 50,000 Hrs | LM80 | B10 | Fire Rated

Nuwan boasts a Die Cast Aluminium build, powered by Cree, featuring an Optic Lens and Tempered Glass Diffuser. With customizable white or black finishes, it offers a versatile beam angle of 36 degrees. The color temperature ranges from 2700K to 6500K, and it comes with fireproof properties.

### Related Family & Dimension

Rated Power	10W
Diameter (mm)	88
Height (mm)	98
Surface Cutout (mm)	62

For More Details Scan QR Code

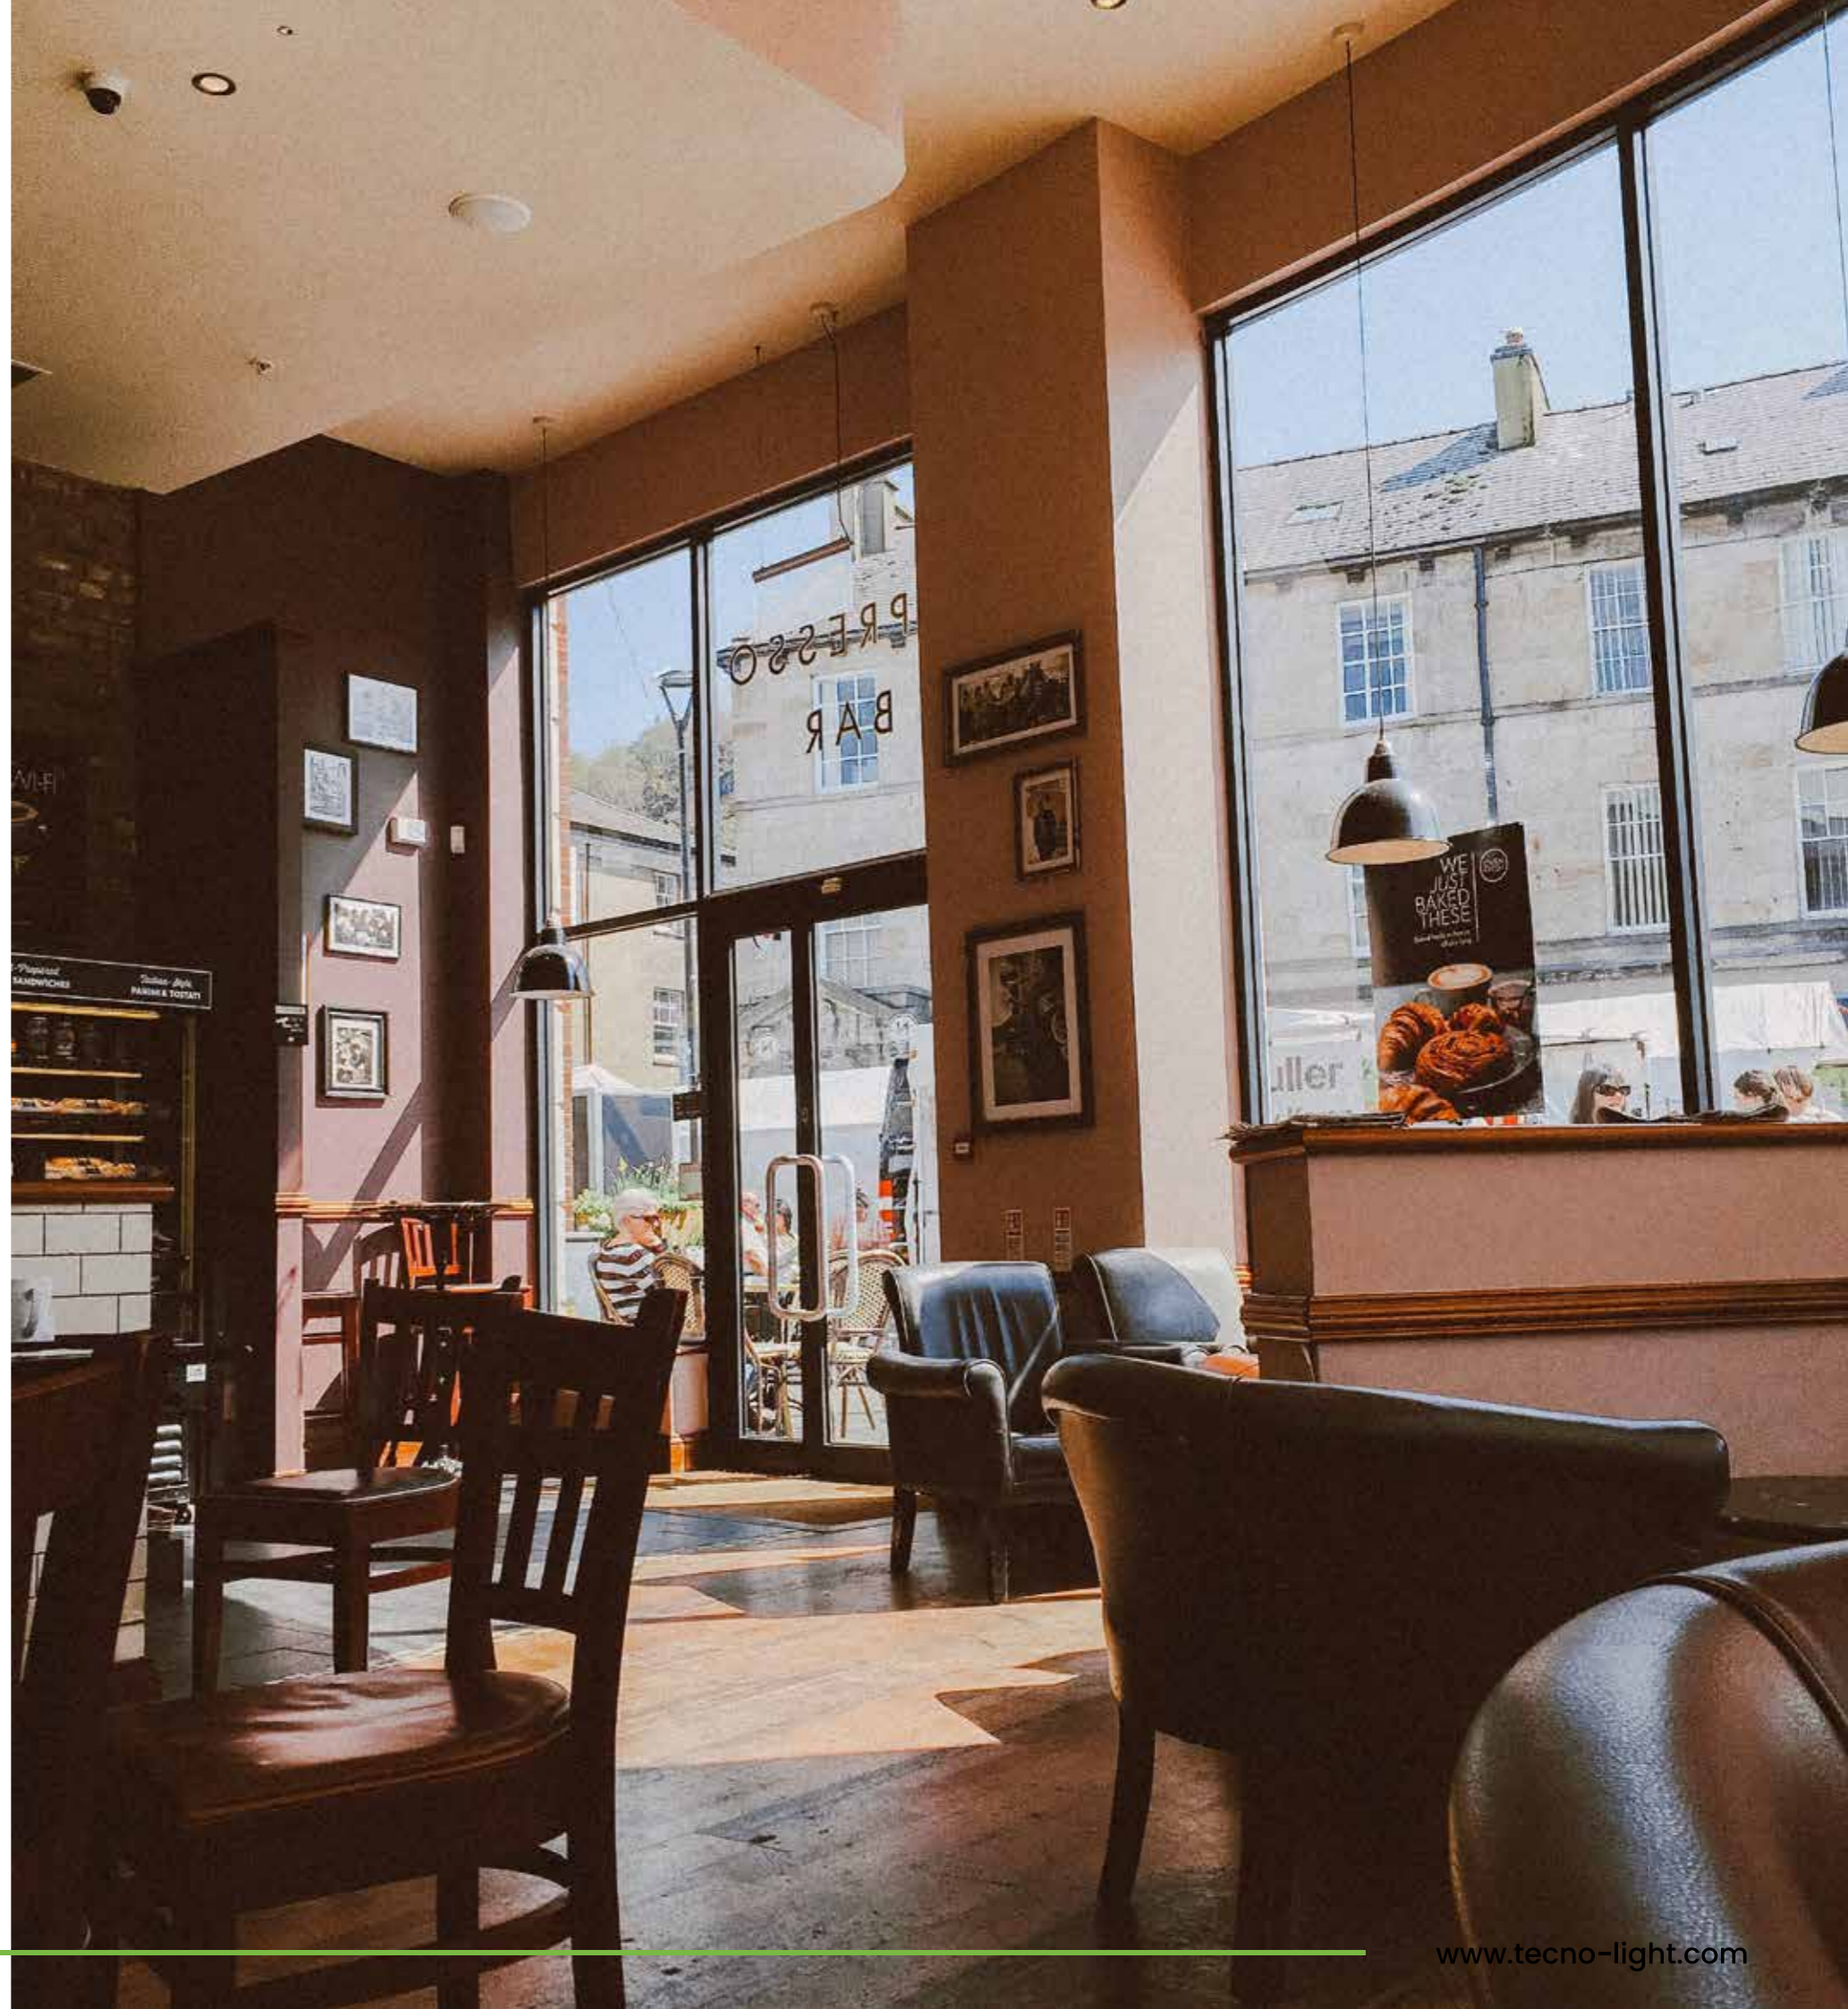



# SURFACE LIGHTS

## SENZA PLUS | 98040.000

SURFACE/ HANGING DOWNLIGHT



IP44 CRI≥90 50,000 Hrs | LM80 | B10 RoHS

Meet "Senza Plus," our Cree-powered Die Cast Aluminium LED downlight. Anodized Aluminium reflector, Clear Glass diffuser, customizable finish in white, black, or your choice. Opt for adjustable 36 and 60-degree beam angles. Senza Plus offers versatile lighting from 2700K to 6500K. Illuminate your space with style and functionality.

### Related Family & Dimension

Rated Power	6W
Diameter (mm)	70
Height (mm)	70
Rated Power	12W
Diameter (mm)	85
Height (mm)	85
Rated Power	15W
Diameter (mm)	100
Height (mm)	100

For More Details Scan QR Code



## LUMINA SURFACE | 94280.000

SURFACE DOWNLIGHT



IP40 CRI≥90 50,000 Hrs | LM80 | B10 RoHS

Meet "Lumina Surface," our versatile Die Cast Aluminium LED Wall Light powered by Citizen, Cree, or Luminus. Anodized Aluminium reflector, Clear Glass diffuser, customizable finish in white, black, or your choice. Opt for a focused 36-degree beam angle. Lumina Surface offers versatile lighting from 2700K to 6500K, illuminating your space with style and functionality.

### Related Family & Dimension

Rated Power	20W
Diameter (mm)	75
Height (mm)	200
Rated Power	30W
Diameter (mm)	100
Height (mm)	200
Rated Power	35W
Diameter (mm)	125
Height (mm)	258

For More Details Scan QR Code



## LUMINA PRIME | 95850.000

SURFACE DOWNLIGHT




IP40 CRI≥90 50,000 Hrs | LM80 | B10 RoHS

Meet "Lumina Prime," our Cree-powered LED downlight. Optic Glass diffuser, customizable finish in white, black, or your choice. Opt for a focused 36-degree beam angle. Lumina Prime offers versatile lighting from 2700K to 6500K. Illuminate your space with style and functionality.

### Related Family & Dimension

Rated Power	15W
Diameter (mm)	65
Height (mm)	145
Rated Power	20W
Diameter (mm)	85
Height (mm)	160

For More Details Scan QR Code



## SENZA | 92090.000

SURFACE DOWNLIGHT



IP40 CRI≥90 50,000 Hrs | LM80 | B10 RoHS

Meet “Senza HG,” our Cree-powered LED downlight. Anodized Aluminium reflector, Clear Glass diffuser, customizable finish in white, black, or your choice. Opt for an adjustable 60-degree beam angle. Senza HG offers versatile lighting from 2700K to 6500K. Illuminate your space with style and functionality.

### Related Family & Dimension

Rated Power 20W  
Diameter (mm) 140  
Height (mm) 140

Rated Power 25W  
Diameter (mm) 145  
Height (mm) 185

Rated Power 40W  
Diameter (mm) 180  
Height (mm) 164

For More Details Scan QR Code



## LORAL | 94360.000

SURFACE DOWNLIGHT



IP40 CRI≥90 30,000 Hrs | LM80 | B10 RoHS

Meet “Loral,” our Epistar-powered Die Cast Aluminium LED Ceiling Light. Opal diffuser, customizable finish in white, black, or your choice. Opt for a broad 120-degree beam angle, with optional adjustments. Loral offers versatile lighting from 2700K to 6500K. Illuminate your space with style and functionality.

### Related Family & Dimension

Rated Power 18W  
Diameter (mm) 300  
Height (mm) 85

Rated Power 30W  
Diameter (mm) 400  
Height (mm) 85

For More Details Scan QR Code



## ZION | 92150.000

SURFACE/ HANGING DOWNLIGHT



IP44 CRI≥90 50,000 Hrs | LM80 | B10 RoHS

Meet “Zion,” our LED Ceiling Light powered by Samsung or Epistar. Acrylic diffuser, customizable finish in white, black, or your choice. Opt for a broad 120-degree beam angle, with optional adjustments. Zion offers versatile lighting from 2700K to 6500K. Illuminate your space with style and functionality.

### Related Family & Dimension

Rated Power 42W  
Diameter (mm) 480  
Height (mm) 95

Rated Power 42W  
Diameter (mm) 500  
Height (mm) 50

Rated Power 55W  
Diameter (mm) 600  
Height (mm) 95

Rated Power 55W  
Diameter (mm) 750  
Height (mm) 95

Rated Power 96W  
Diameter (mm) 900  
Height (mm) 100

For More Details Scan QR Code



## DEJSA | 99990.000

SURFACE RETRACTABLE DOWNLIGHT



IP40 CRI≥90 50,000 Hrs | LM80 | B10 RoHS

Meet “Dejsa,” our Cree-powered Die Cast Aluminium LED downlight. Anodized Aluminium reflector, Clear Glass diffuser, customizable finish in white, black, or your choice. Opt for a focused 24-degree beam angle. Dejsa offers versatile lighting from 2700K to 6500K. Illuminate your space with style and functionality.

### Related Family & Dimension

Rated Power	20W
Diameter (mm)	100
Height (mm)	100

For More Details Scan QR Code



## DROP EDGE | 96220.000

SURFACE ADJUSTABLE DOWNLIGHT



IP40 CRI≥90 50,000 Hrs | LM80 | B10 RoHS

Meet Dropedge, the Aluminium Surface Adjustable Downlight powered by Luminus, Citizen, or Cree. With a Clear Glass diffuser, Chrome reflector, and optional 36-degree beam angle, Dropedge offers stylish versatility in white, black, or custom finishes. Its CCT ranges from 2700K to 6500K, providing adaptable lighting in a sleek design.

### Related Family & Dimension

Rated Power	10W
Diameter (mm)	65
Height (mm)	170

For More Details Scan QR Code



## LUMINA SURFACE | 92920.000

SURFACE RETRACTABLE DOWNLIGHT



IP40 CRI≥90 50,000 Hrs | LM80 | B10 RoHS

Meet “Lumina Surface Adj,” our versatile Die Cast Aluminium LED surface Light powered by Citizen, Cree, or Luminus. Anodized Aluminium reflector, Clear Glass diffuser, customizable finish in white, black, or your choice. Opt for a focused 36-degree beam angle. Lumina Surface offers versatile lighting from 2700K to 6500K, illuminating your space with style and functionality.

### Related Family & Dimension

Rated Power	10W
Diameter (mm)	55
Height (mm)	184
Rated Power	20W
Diameter (mm)	75
Height (mm)	195
Rated Power	30W
Diameter (mm)	100
Height (mm)	200

For More Details Scan QR Code



## CAMLUCE – SURFACE | 91920.000

SURFACE RETRACTABLE DOWNLIGHT



IP40 CRI≥90 50,000 Hrs | LM80 | B10 RoHS

Introducing “Camluce Surface,” our Cree-powered Die Cast Aluminium LED surface Light. Anodized Aluminium reflector, Frosted Lens diffuser, customizable finish in white, black, or your choice. Adjust the beam angle from 12 to 52 degrees for versatile lighting. Camluce Surface illuminates your space with style and functionality, offering a range from 2700K to 6500K.

### Related Family & Dimension

For More Details Scan QR Code

Before Zoom

Rated Power 10W  
D-H (mm) 55-215

Rated Power 20W  
D-H (mm) 75-238



After Zoom

Rated Power 10W  
D-H (mm) 55-235

Rated Power 20W  
D-H (mm) 75-252

## RYANA | 94170.000

SURFACE ADJUSTABLE DOWNLIGHT



IP40 CRI≥90 50,000 Hrs | LM80 | B10 RoHS

Meet “Ryana,” our Cree-powered Die Cast Aluminium LED downlight. Anodized Aluminium reflector, Clear Glass diffuser, customizable finish in white, black, or your choice. Opt for a focused 36-degree beam angle. Ryana offers versatile lighting from 2700K to 6500K. Illuminate your space with style and functionality.

### Related Family & Dimension


For More Details Scan QR Code

Rated Power 35W  
Diameter (mm) 115  
Height (mm) 230



## AARON | 91670.000

SURFACE DOWNLIGHT

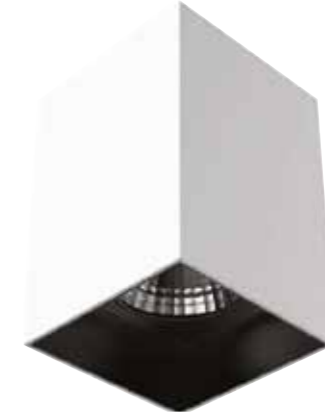

IP40 CRI≥90 50,000 Hrs | LM80 | B10 RoHS

Meet “Aaron,” our Cree-powered LED downlight. Anodized Aluminium reflector, Clear Glass diffuser, customizable finish in white, black, or your choice. Opt for an adjustable 60-degree beam angle. Aaron offers versatile lighting from 2700K to 6500K, effortlessly combining style with functionality. Illuminate your space with Aaron’s modern design.

### Related Family & Dimension

For More Details Scan QR Code

Rated Power 15W  
Length (mm) 100  
Width (mm) 100  
Height (mm) 145



## RIANO PRIME | 92290.000

SURFACE DOWNLIGHT



IP44 CRI≥90 50,000 Hrs | LM80 | B10 RoHS

Meet "Riano Prime," our Cree-powered LED downlight. Anodized Aluminium reflector, Clear Glass diffuser, customizable finish in white, black, or your choice. Opt for an adjustable 60-degree beam angle. Riano Prime offers versatile lighting from 2700K to 6500K, combining style with functionality. Illuminate your space with ease and elegance.

### Related Family & Dimension

Rated Power	1 X 15W
Length (mm)	100
Width (mm)	100
Height (mm)	136

Rated Power	2 X 15W
Length (mm)	200
Width (mm)	100
Height (mm)	136

Rated Power	2 X 20W
Length (mm)	200
Width (mm)	100
Height (mm)	136

For More Details Scan QR Code



## RIANO | 91660.000

SURFACE DOWNLIGHT



IP44 CRI≥90 50,000 Hrs | LM80 | B10 RoHS

Meet "Riano," our Cree-powered LED downlight. Anodized Aluminium reflector, Clear Glass diffuser, customizable finish in white, black, or your choice. Opt for an adjustable 60-degree beam angle. Riano offers versatile lighting from 2700K to 6500K, combining style with functionality. Illuminate your space effortlessly with Riano.

### Related Family & Dimension

Rated Power	1 X 11W
Length (mm)	100
Width (mm)	100
Height (mm)	140

Rated Power	2 X 11W
Length (mm)	198
Width (mm)	100
Height (mm)	140

For More Details Scan QR Code



## ONELIGHT | 99910.000

SURFACE ANTIGLARE DOWNLIGHT



IP44 CRI≥90 50,000 Hrs | LM80 | B10 RoHS

Meet "Onelight," our Cree-powered LED downlight. Chrome reflector, Optic Lens diffuser, customizable finish in white, black, or your choice. Opt for an adjustable 36-degree beam angle. Onelight offers versatile lighting from 2700K to 6500K, effortlessly blending style with functionality. Illuminate your space with Onelight's modern design.

### Related Family & Dimension

Rated Power	12W
Length (mm)	100
Width (mm)	100
Height (mm)	100

For More Details Scan QR Code



## INCLINE SR | 99410.000

LINEAR SURFACE ANTIGLARE DOWNLIGHT



IP40 CRI≥90 50,000 Hrs | LM80 | B10 RoHS

Meet "Incline SR," our Cree-powered LED downlight. Anodized Aluminium reflector, Clear Glass diffuser, customizable finish in white, black, or your choice. Opt for adjustable beam angles of 22, 36, and 45 degrees. Incline SR offers versatile lighting from 2700K to 6500K, blending style with functionality.

### Related Family & Dimension

Rated Power	5 X 2W
Length (mm)	137
Width (mm)	34.5
Height (mm)	80

Rated Power	10 X 2W
Length (mm)	285
Width (mm)	34.5
Height (mm)	80

Rated Power	15 X 2W
Length (mm)	410
Width (mm)	34.5
Height (mm)	80

For More Details Scan QR Code



## CENO | 96080.000

SURFACE TUNABLE IP RATED DOWNLIGHT



IP55 CRI≥90 50,000 Hrs | LM80 | B10 RoHS

Meet Ceno, the versatile Aluminium Surface Tunable Light powered by Samsung or Epistar. With an Acrylic diffuser, Ceno comes in white, black, or custom finishes. It offers customizable lighting with an optional 110-degree beam angle and adjustable wattage. Its CCT ranges from 2700K to 6500K, providing sleek and adaptable lighting in a compact design.

### Related Family & Dimension

Rated Power	10W - 15W
Diameter (mm)	280
Height (mm)	68

Rated Power	13W - 18W
Diameter (mm)	360
Height (mm)	72

Rated Power	22W - 32W
Diameter (mm)	410
Height (mm)	76

For More Details Scan QR Code



## SENZA PRO | 99560.000

SURFACE IP RATED DOWNLIGHT



IP65 CRI≥90 50,000 Hrs | LM80 | B10 RoHS

Meet "Senza Pro," our Cree-powered LED downlight. Anodized Aluminium reflector, Clear Glass diffuser, customizable finish in white, black, or your choice. Opt for an adjustable 60-degree beam angle. Senza Pro offers versatile lighting from 2700K to 6500K. Illuminate your space with style and functionality.

### Related Family & Dimension

Rated Power	15W
Diameter (mm)	100
Height (mm)	100

For More Details Scan QR Code





# PENDANT LIGHTS

## VESI | 71800.000

PENDANT LIGHT



IP40 CRI≥90 RoHS 30,000 Hrs | LM80 | B10

The Vesi Pendant Lamp is a stylish and elegant pendant lamp with a dome shaped exterior and glass. It is a stand-alone beauty in a room, transforming any setting into one of comfort and intimacy.

### Related Family & Dimension

Rated Power	7W
Diameter (mm)	230
Height (mm)	150

For More Details Scan QR Code



## DISC DICE | 94720.000

PENDANT LIGHT



IP40 CRI≥90 RoHS 30,000 Hrs | LM80 | B10

The DISC Dice pendant produces an even diffusive plane of light in a distinctive diminutive profile. A revolved sleek aluminium cap clasps the thin optic and is supported by a matching cloth cable. Excellent detailing and a refined finish offering are defining qualities of the contemporary fixture.

### Related Family & Dimension

Rated Power	8W
Option	
Diameter (mm)	250
Diameter (mm)	350
Diameter (mm)	480
Diameter (mm)	600

For More Details Scan QR Code



## ANORA | 93540.000

CYLINDRICAL PENDANT LIGHT



IP40 RoHS 50,000 Hrs | LM80 | B10 CRI≥90

Anora is a well-crafted LED hanging light that is designed to transform your space into a canvas of timeless light and enduring sophistication. With its sleek design, high output illumination, and smooth atmosphere, Anora casts a soft glow that highlights the beauty of your surroundings, creating a truly enchanting and inviting scene.

### Related Family & Dimension

Rated Power	12W
Diameter (mm)	75
Height (mm)	160

For More Details Scan QR Code



## SPINDLE | 92200.000

CYLINDRICAL PENDANT LIGHT



IP40 CRI≥90 RoHS 30,000 Hrs | LM80 | B10

Spindle is an architectural engineered LED pendant light with performance to create a long lasting reliable product. This product provide high output illumination a smooth atmosphere. Spindle is a good because of its range of sizes and reflectors. Easy to put together.

### Related Family & Dimension

Rated Power	5W
Diameter (mm)	50
Height (mm)	400
Rated Power	7W
Diameter (mm)	50
Height (mm)	400
Rated Power	10W
Diameter (mm)	50
Height (mm)	600
Rated Power	12W
Diameter (mm)	57
Height (mm)	600
Rated Power	15W
Diameter (mm)	50
Height (mm)	700

For More Details Scan QR Code



## LENCHURA | 97800.000

CYLINDRICAL PENDANT LIGHT



IP40 CRI≥90 RoHS 50,000 Hrs | LM80 | B10

Lenchura is a sleek and modern LED lamp for interiors that has a black aluminium finish. The lamp is suitable for various spaces, it is safe, energy-efficient and cost-effective. Lenchura is a great choice for adding a touch of elegance and brightness to any space.

### Related Family & Dimension

Rated Power	16W
Diameter (mm)	98
Height (mm)	380

For More Details Scan QR Code



## LUMINA HG | 94290.000

CYLINDRICAL PENDANT LIGHT



IP40 CRI≥90 RoHS 50,000 Hrs | LM80 | B10

Lumina HG is the perfect choice for anyone who wants to add a touch of luxury and sophistication to their space, without sacrificing versatility or durability. It is available in a range of sizes and reflectors, making it ideal for a wide range of indoor and outdoor spaces. It is also easy to install and maintain, making it a practical and functional choice for any commercial or residential setting.

### Related Family & Dimension

Rated Power	20W
Diameter (mm)	75
Height (mm)	200
Rated Power	30W
Diameter (mm)	98
Height (mm)	200

For More Details Scan QR Code



## SENZA HG | 93410.000

CYLINDRICAL PENDANT LIGHT



IP44 CRI≥90 30,000 Hrs | LM80 | B10 RoHS

Meet "Senza HG," our Cree-powered LED pendant light. Anodized Aluminium reflector, Clear Glass diffuser, customizable finish in white, black, or your choice. Opt for an adjustable 60-degree beam angle. Senza HG offers versatile lighting from 2700K to 6500K. Illuminate your space with style and functionality.

### Related Family & Dimension

Rated Power	25W
Diameter (mm)	146
Height (mm)	192

For More Details Scan QR Code



## MILA | 98690.000

CYLINDRICAL PENDANT LIGHT



IP40 CRI≥90 RoHS 50,000 Hrs | LM80 | B10

Imagine stepping into a room illuminated by Mila pendant lights. The soft glow of light casts a warm and inviting atmosphere, highlighting the unique features of your space. The Mila pendant lights themselves are a work of art, with their elegant design. They are the perfect addition to any home or business that seeks to create a space of timeless sophistication.

### Related Family & Dimension

Rated Power	30W   40W
Diameter (mm)	110
Height (mm)	1500 Max
Diameter (mm)	211
Height (mm)	1500 Max
Diameter (mm)	265
Height (mm)	1500 Max

For More Details Scan QR Code



## GIRO HP | 95860.000

RING PENDANT LIGHT



IP40 CRI≥90 RoHS 30,000 Hrs | LM80 | B10

Giro is a stylish and versatile suspension light fixture that creates both direct and indirect light emission. It features a unique pickled sheet metal cap and a turned aluminium structure with a gold or white finish. The light is diffused through a molded polycarbonate micro-prismatic diffuser that enhances the quality and uniformity of the illumination. Giro is a perfect choice for adding elegance and sophistication to any space.

### Related Family & Dimension

Rated Power	74W
Diameter (mm)	800
Height (mm)	250

For More Details Scan QR Code



## BRAVA | 92160.000

RING PENDANT LIGHT



IP40 CRI≥90 RoHS 30,000 Hrs | LM80 | B10

Brava is a well-crafted LED pendant light that is designed to transform your space into a canvas of timeless light and effortless sophistication. With its sleek design, high output illumination, and smooth atmosphere, Brava casts a soft glow that highlights the beauty of your surroundings, creating a truly enchanting and inviting scene.

### Related Family & Dimension

Rated Power	30W
Diameter (mm)	480MM
Rated Power	36W
Diameter (mm)	600MM
Rated Power	40W
Diameter (mm)	800MM
Rated Power	60W
Diameter (mm)	1000MM
Diameter (mm)	1200MM
Rated Power	72W
Diameter (mm)	1500MM
Rated Power	92W
Diameter (mm)	1800MM

For More Details Scan QR Code



## LUCETTA I | 92170.000

RING PENDANT LIGHT



IP44 CRI≥90 RoHS 50,000 Hrs | LM80 | B10

Lucetta is a type of light fixture that has multiple hanging lights that can be arranged to look like a collection of individual hanging pendants. It is a convenient option for rooms that only have one electrical outlet in the ceiling, and it is ideal for use above billiards tables, kitchen counters, work areas, and dining room tables.

### Related Family & Dimension

Rated Power	30W   40W   60W   75W   80W
Diameter (mm)	400
	600
	800
	1000

For More Details Scan QR Code



## LUCETTA III | 92170.000

RING PENDANT LIGHT



IP44 CRI≥90 RoHS 30,000 Hrs | LM80 | B10

Lucetta III have multiple hanging lights options that provide a look that is very similar to a collection of individual hanging pendants. This is a more convenient option for rooms that only contain a singular opening overhead for electricity. They are ideally used above billiards tables, kitchen counters, work areas and dining room tables.

### Related Family & Dimension

Rated Power	60W   75W   90W
Diameter	1000   800   600

For More Details Scan QR Code



## BEZEL | 93460.000

RING PENDANT LIGHT



IP40 CRI≥90 RoHS 50,000 Hrs | LM80 | B10

Bezel hanging lights have multiple hanging lights options, providing a look that is very similar to a collection of individual hanging pendants. This is a more convenient option for rooms that only contain a singular opening overhead for electricity. They are ideally used above billiards tables, kitchen counters, work areas, and dining room tables.

### Related Family & Dimension

Rated Power	25W
Diameter (mm)	450
Width (mm)	60
Height (mm)	70
Rated Power	30W
Diameter (mm)	600
Width (mm)	60
Height (mm)	70
Rated Power	40W
Diameter (mm)	800
Width (mm)	60
Height (mm)	70

For More Details Scan QR Code



## LOCERO | 93060.000

RING PENDANT LIGHT



IP40 CRI≥90 RoHS 50,000 Hrs | LM80 | B10

Locero is available in a range of sizes and reflectors, making it ideal for a wide range of indoor and outdoor spaces. It is also easy to install and maintain, making it a practical and functional choice for any commercial or residential setting.

### Related Family & Dimension

Rated Power	30W   40W   60W   75W   80W
Diameter (mm)	400
	600
	800
	1000

For More Details Scan QR Code



## CURVE 35 | 97850.000

CURVE PENDANT LIGHT



IP40 RoHS 50,000 Hrs | LM80 | B10 CRI≥85

Curve 35 by Tecnolight is a sophisticated and versatile suspension lighting fixture for interiors that delivers both direct and indirect light emission. It has a bended extruded aluminium structure with a variety of colours to choose from, such as white, black, bronze, mat brass or titanium poly-acrylic paint. The light is smoothly diffused through an extruded polycarbonate diffuser with an opaline finish.

### Related Family & Dimension

Rated Power	12W
Length (mm)	460
Width (mm)	460
Height (mm)	37

For More Details Scan QR Code



**VITARO | 98570.000**  
LINEAR ANTI GLARE PENDANT LIGHT



IP40 CRI≥90 RoHS 50,000 Hrs | LM80 | B10

Vitaro is a great option for anyone looking for a high-quality, stylish, and easy-to-use LED linear light with honeycomb louvre diffuser. It is perfect for both commercial and residential settings, and it will provide you with years of trouble-free service.

**Related Family & Dimension**

Rated Power	30W
Length (mm)	1500
Width (mm)	75
Height (mm)	105

For More Details Scan QR Code



**STOKES HP | 94710.000**  
LINEAR ANTI GLARE PENDANT LIGHT



IP40 CRI≥90 RoHS 50,000 Hrs | LM80 | B10

Stokes HP is a well-crafted LED linear light that is designed to elevate your space with timeless elegance and effortless vision protection. With its sleek design, anti-glare engineering, and high output illumination, Stokes HP is the perfect choice for anyone who wants to add a touch of luxury and sophistication to their space, without sacrificing comfort or versatility.

**Related Family & Dimension**

Rated Power	25W
Length (mm)	1000
Width (mm)	48
Height (mm)	75

For More Details Scan QR Code



**VISO | 97240.000**  
LINEAR PENDANT LIGHT




IP40 CRI≥90 RoHS 50,000 Hrs | LM80 | B10

Viso is available in a range of sizes and reflectors, making it ideal for a wide range of indoor spaces. It is also easy to install and maintain, making it a practical and functional choice for any commercial or residential setting.

**Related Family & Dimension**

Rated Power	36W
Diameter (mm)	62
Height (mm)	1200

For More Details Scan QR Code



## SIONOR | 94690.000

LINEAR PENDANT LIGHT



IP40 CRI≥90 RoHS 30,000 Hrs | LM80 | B10

Sionor is a well-crafted LED linear light that is designed to elevate your space with timeless elegance and effortless vision protection. With its sleek design, anti-glare engineering, and high output illumination, Sionor is the perfect choice for anyone who wants to add a touch of luxury and sophistication to their space, without sacrificing comfort or versatility.

### Related Family & Dimension


Rated Power	30W
Length (mm)	1504
Width (mm)	186
Height (mm)	130

For More Details Scan QR Code



## DESCO | 98970.000

ACOUSTIC LINEAR PENDANT LIGHT

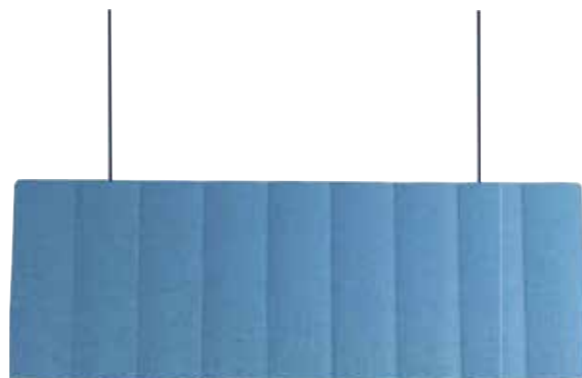

IP40 CRI≥90 RoHS 50,000 Hrs | LM80 | B10

Desco is a well-engineered LED linear light that is designed to elevate your space with timeless elegance and effortless vision protection. With its sleek design, anti-glare engineering, and high output illumination, Desco is the perfect choice for anyone who wants to add a touch of luxury and sophistication to their space, without sacrificing comfort, versatility, or eye health.

### Related Family & Dimension

Rated Power	25W
Length (mm)	1100
Width (mm)	48
Height (mm)	75

For More Details Scan QR Code



## MARIO HG | 94410.000

ROUND PENDNAT LIGHT



IP40 CRI≥90 RoHS 50,000 Hrs | LM80 | B10

Mario HG is a durable and versatile LED panel light that provides bright, even illumination in a variety of sizes and styles.

### Related Family & Dimension

Rated Power	15W
Diameter (mm)	300
Height (mm)	20
Rated Power	24W
Diameter (mm)	310
Height (mm)	12.5
Rated Power	36W
Diameter (mm)	400
Height (mm)	12.5
Rated Power	40W
Diameter (mm)	600
Height (mm)	20
Rated Power	90W
Diameter (mm)	1000
Height (mm)	12.5

For More Details Scan QR Code





# TRACK LIGHTS

## FAINA R | 91900.000

ANTI GLARE TRACK LIGHT



IP40 CRI≥90 RoHS 50,000 Hrs | LM80 | B10

Meet Faina, the aluminium Track light with Cree, Citizen, or Luminus power, featuring a deep anti-glare reflector and a focused 36-degree beam angle. The sleek black finish adds sophistication, with customization options available. Faina's CCT ranges from 2700K to 6500K, offering versatile lighting in a modern design.

### Related Family & Dimension

Rated Power	12W
Diameter (mm)	85
Height (mm)	160

For More Details Scan QR Code



## PROVIL | 91090.000

ANTI GLARE TRACK LIGHT



IP40 CRI≥90 RoHS 50,000 Hrs | LM80 | B10

Meet Provil, the aluminium Track light with Luminus power, Snoot Optic reflector, and Optic Lens diffuser for a focused 36-degree beam angle. The sleek black finish adds sophistication, with customization options available. Provil's CCT ranges from 2700K to 6500K, offering precise lighting in a modern design.

### Related Family & Dimension

Rated Power	20W
Diameter (mm)	115
Length (mm)	110
Height (mm)	120

For More Details Scan QR Code



## LIOS | 93580.000

ANTI GLARE TRACK LIGHT



IP40 CRI≥90 RoHS 50,000 Hrs | LM80 | B10

Meet Lios, the aluminium Track light with Luminus power, Mirrored Chrome Finish reflector, and Optic Lens diffuser for a focused 36-degree beam angle. The sleek black finish adds sophistication, with customization options available. Lios's CCT ranges from 2700K to 6500K, offering precise lighting in a modern design.

### Related Family & Dimension

Rated Power	12W
Diameter (mm)	49
Height (mm)	100

For More Details Scan QR Code



Rated Power	12W
Diameter (mm)	60
Height (mm)	130

## LUMINA | 91910.000

TRACK LIGHT



IP40 CRI≥90 RoHS 50,000 Hrs | LM80 | B10

Introducing Lumina, a sleek aluminium track light with a 30-degree beam angle for precise illumination. The clear glass diffuser and anodized aluminium reflector, powered by Cree, Citizen, or Luminus, deliver high-performance lighting. Choose from classic white, black, or custom finishes to suit your style. Lumina effortlessly combines form and function, making it the ideal track light for modern spaces.

### Related Family & Dimension

Rated Power 12W  
Diameter (mm) 55  
Height (mm) 160

Rated Power 20W  
Diameter (mm) 75  
Height (mm) 195

Rated Power 30W  
Diameter (mm) 95  
Height (mm) 200

For More Details Scan QR Code



## OPTEC | 95840.000

TRACK LIGHT



IP40 CRI≥90 RoHS 50,000 Hrs | LM80 | B10

Introducing Optec, the sleek aluminium track light with a 36-degree beam angle and customizable CCT (2700K to 6500K). Powered by Luminus, it features an optic lens diffuser and Snoot Optic reflector for precision lighting. Available in white, black, or custom finishes, Optec effortlessly combines style and efficiency in a compact design.

### Related Family & Dimension

Rated Power 20W  
Diameter (mm) 65  
Height (mm) 140

Rated Power 30W  
Diameter (mm) 85  
Height (mm) 160

For More Details Scan QR Code



## FABER | 99920.000

TRACK LIGHT



IP40 CRI≥90 RoHS 50,000 Hrs | LM80 | B10

Meet Faber, the aluminium track light with a 36-degree beam angle, Frosted Convex Lens reflector, and Cree power. Optic Lens diffuser ensures precision. Choose white, black, or custom finishes. Faber's CCT ranges from 2700K to 6500K, offering versatile illumination in a sleek design.

### Related Family & Dimension

Rated Power 30W  
Diameter (mm) 90  
Height (mm) 115

For More Details Scan QR Code



## FABER MINI | 99920.000

TRACK LIGHT



IP40 CRI≥90 RoHS 50,000 Hrs | LM80 | B10

Meet Faber Mini, the aluminium track light with a 12, 36, 60 degrees beam angle, Frosted Convex Lens reflector, and Cree power. Optic Lens diffuser ensures precision. Choose white, black, or custom finishes. Faber's CCT ranges from 2700K to 6500K, offering versatile illumination in a sleek design.

### Related Family & Dimension

Rated Power	30W
Diameter (mm)	80
Length (mm)	130

For More Details Scan QR Code



## FLORENCE | 90740.000

TRACK LIGHT



IP40 RoHS 50,000 Hrs | LM80 | B10 CRI≥90

Meet Florence, the aluminium Track light with Cree power, a 12, 36, 60 degrees beam angle, and clear glass diffuser. Anodized Aluminium reflector adds elegance. Choose from white, black, or custom finishes. Florence's CCT ranges from 2700K to 6500K, providing versatile lighting in a stylish design.

### Related Family & Dimension

Rated Power	30W
Diameter (mm)	100
Height (mm)	95

For More Details Scan QR Code



## LAURIA | 98070.000

TRACK LIGHT



IP40 CRI≥90 RoHS 50,000 Hrs | LM80 | B10

Meet Lauria, the aluminium Track light with Cree power, offering adjustable beam angles (12, 36, 60 degrees) and a clear glass diffuser. Anodized Aluminium reflector adds sophistication. Choose from white, black, or custom finishes. Lauria's CCT ranges from 2700K to 6500K, providing versatile lighting in a stylish design.

### Related Family & Dimension

Rated Power	36W
Diameter (mm)	110
Height (mm)	160
Rated Power	42W
Diameter (mm)	110
Height (mm)	160

For More Details Scan QR Code



## DOMINO | 97500.000

BEAM ANGLE ADJUSTABLE TRACK LIGHT



IP40 RoHS 50,000 Hrs | LM80 | B10 CRI≥85

Domino: Elevate your space with the Domino track light, featuring an optic lens and a snoot optic reflector with an adjustable beam angle from 10 to 50 degrees. Powered by Luminus, it offers a versatile color temperature range from 2700K to 6500K. The sleek design is available in white, black, and customizable finishes, adding a touch of modern sophistication to your environment.

### Related Family & Dimension

Rated Power	30W
Diameter (mm)	70
Height (mm)	150

For More Details Scan QR Code



## CAMLUCE | 91920.000

BEAM ANGLE ADJUSTABLE TRACK LIGHT



IP40 CRI≥90 RoHS 50,000 Hrs | LM80 | B10

Introducing Camluce, a sleek aluminium track light with adjustable beam angles (12 to 50 degrees) for personalized illumination. The optic lens diffuser and Snoot Optic 12 to 50-degree reflector, powered by Luminus, ensure precise lighting. Choose from white, black, or custom finishes to complement any space. Camluce effortlessly blends style and functionality with a color temperature range from 2700K to 6500K.

### Related Family & Dimension

Rated Power	10W
Diameter (mm)	43
Height (mm)	200
Rated Power	20W
Diameter (mm)	62
Height (mm)	210
Rated Power	30W
Diameter (mm)	85
Height (mm)	200

For More Details Scan QR Code



## ROTEPING | 93660.000

TUNABLE TRACK LIGHT



IP44 CRI≥90 RoHS 30,000 Hrs | LM80 | B10

Meet Roteping, the aluminium Track Tunable Light with Cree power, adjustable beam angle, and clear glass diffuser. Anodized Aluminium reflector adds sophistication. Choose from white, black, or custom finishes. Roteping's CCT ranges from 2700K to 6500K, delivering tailored lighting in a sleek design.

### Related Family & Dimension

Rated Power	30W
Diameter (mm)	85
Length (mm)	235
Rated Power	40W
Diameter (mm)	85
Length (mm)	235

For More Details Scan QR Code



## FAINA SQ | 91900.000

ANTI GLARE TRACK LIGHT



IP40 CRI≥90 RoHS 50,000 Hrs | LM80 | B10

Meet Faina, the aluminium Track light with Cree, Citizen, or Luminus power, featuring a deep anti-glare reflector and a focused 36-degree beam angle. The sleek black finish adds sophistication, with customization options available. Faina's CCT ranges from 2700K to 6500K, offering versatile lighting in a modern design.

### Related Family & Dimension

Rated Power	12W
Length (mm)	85
Width (mm)	85
Height (mm)	92

For More Details Scan QR Code



## DELICIA | 91970.000

ANTI GLARE TRACK LIGHT



IP40 CRI≥90 RoHS 50,000 Hrs | LM80 | B10

Meet Delicia, the aluminium Track light with Osram power and Frosted Optic Lens for a gentle 30-degree beam angle. Available in white, black, or custom finishes, Delicia's CCT ranges from 2700K to 6500K, providing versatile lighting in a modern design.

### Related Family & Dimension

Rated Power	45W
Width (mm)	170
Length (mm)	128
Height (mm)	55

For More Details Scan QR Code



## AVO | 96000.000

ANTI GLARE LINEAR TRACK LIGHT



IP40 CRI≥90 RoHS 50,000 Hrs | LM80 | B10

Meet Avo, the aluminium Track light with Citizen power, Clear Glass diffuser, and Deep Anti-Glare reflector for precise lighting. Available in white, black, or custom finishes, Avo's CCT ranges from 2700K to 6500K, offering versatility in a sleek design.

### Related Family & Dimension


Rated Power	1 X 32W
Width (mm)	130
Length (mm)	360
Height (mm)	228
Rated Power	2 X 32W
Width (mm)	186
Length (mm)	360
Height (mm)	228

For More Details Scan QR Code



## URANO | 94330.000

ADJUSTABLE LINEAR TRACK LIGHT

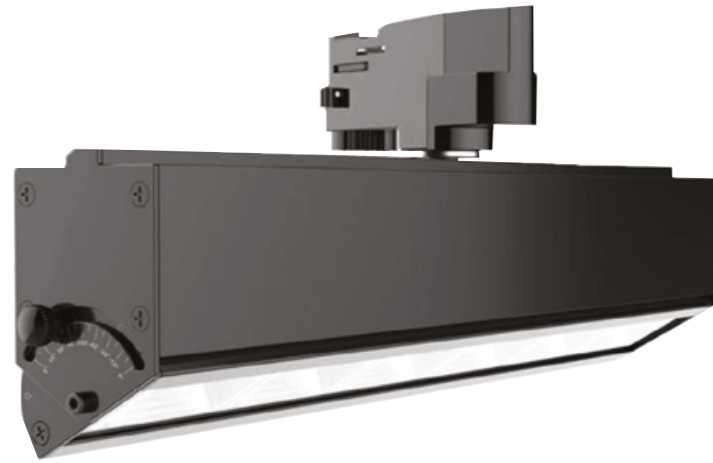

IP40 CRI≥90 RoHS 50,000 Hrs | LM80 | B10

Urano LED Track light luminance can rotate through 350 Degree, Light panel can tilt through +60 Degree. Specially developed optic design for uniform, rectangle illumination without dark dots. Proposal applications are clothing stores, supermarkets.

### Related Family & Dimension

Rated Power	20W
Length (mm)	500
Width (mm)	60
Height (mm)	148

For More Details Scan QR Code



## ORBIO | 94320.000

ADJUSTABLE LINEAR TRACK LIGHT



IP40 CRI≥90 RoHS 50,000 Hrs | LM80 | B10

Meet Orbio, the aluminium Track light powered by Cree with adjustable beam angles (30, 60, 100 degrees) and a lens diffuser. The sleek black finish adds sophistication, and customization options are available. Orbio's CCT ranges from 2700K to 6500K, offering versatile lighting in a stylish design.

### Related Family & Dimension

Rated Power	2 X 25W
Length (mm)	390
Width (mm)	146
Height (mm)	87

For More Details Scan QR Code



## SUPERLINEAR | 93660.000

ASYMMETRIC TRACK LIGHT



IP40 CRI≥90 RoHS 50,000 Hrs | LM80 | B10

Meet Superlinear, the aluminium Track light with Luminus power and a PC Optical Lens diffuser for a focused 36-degree beam angle. The sleek black finish adds sophistication, with customization options available. Superlinear's CCT ranges from 2700K to 6500K, offering precise lighting in a modern design.

### Related Family & Dimension


Rated Power	40W
Length (mm)	1160
Width (mm)	80
Height (mm)	80
Rated Power	60W
Length (mm)	1160
Width (mm)	80
Height (mm)	80
Rated Power	80W
Length (mm)	1160
Width (mm)	80
Height (mm)	80

For More Details Scan QR Code



## LANZIA | 94310.000

ASYMMETRIC TRACK LIGHT

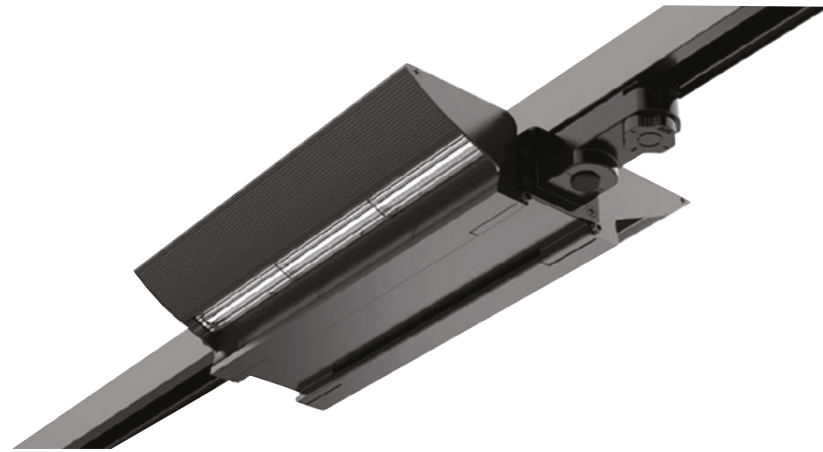

IP40 | CRI≥90 | RoHS | 50,000 Hrs | LM80 | B10

Meet Lanzia, the aluminium Track light with Luminus power and Clear Glass diffuser for a focused 30-degree beam angle. In sleek black, with customization options, Lanzia's CCT ranges from 2700K to 6500K, offering versatile lighting in a modern design.

### Related Family & Dimension

Rated Power	54W
Length (mm)	390
Width (mm)	218
Height (mm)	70

For More Details Scan QR Code



# MAGNETIC LIGHTS



## AVIRA SPOT | 98160.000

MAGNETIC ANTIGLARE SPOTLIGHT



IP40 CRI≥90 RoHS 50,000 Hrs | LM80 | B10

The Avira Spot is a discreet and versatile LED light that can be used for both accent and general lighting. It has a shallow installation depth, making it easy to install in a variety of spaces. The elegant silky trim adds a touch of sophistication to any interior.

### Related Family & Dimension

Power Rated	3W
Diameter (mm)	30
Height (mm)	95
Power Rated	6W
Diameter (mm)	38
Height (mm)	75
Power Rated	10W
Diameter (mm)	50
Height (mm)	99
Power Rated	12W
Diameter (mm)	59
Height (mm)	110
Power Rated	20W
Diameter (mm)	59
Height (mm)	129

For More Details Scan QR Code



## AVIRA GRILL | 99760.000

MAGNETIC ANTIGLARE LINEAR LIGHT



IP40 CRI≥90 RoHS 50,000 Hrs | LM80 | B10

Meet Avira Linear, the Aluminium LED Grill Magnetic Track light with Osram and Samsung power, Opal diffuser, and customizable finishes. Optional 12 to 55-degree beam angle, and Avira Linear's CCT ranges from 2700K to 6500K, providing versatile lighting in a sleek design.

### Related Family & Dimension

Power Rated	10W
Length (mm)	192
Width (mm)	20
Height (mm)	37
Power Rated	20W
Length (mm)	388
Width (mm)	20
Height (mm)	37
Power Rated	24W
Length (mm)	579
Width (mm)	20
Height (mm)	37

For More Details Scan QR Code



## AVIRA ADJ GRILL | 99770.000

MAGNETIC ADJUSTABLE ANTIGLARE LINEAR LIGHT



IP40 CRI≥90 RoHS 50,000 Hrs | LM80 | B10

Meet Avira Linear, the Aluminium LED Linear Dot Magnetic Track light with Osram and Samsung power, Opal diffuser, and customizable finishes. Optional 120-degree beam angle, and Avira Linear's CCT ranges from 2700K to 6500K, providing versatile lighting in a sleek design.

### Related Family & Dimension

Power Rated	10W
Length (mm)	195
Width (mm)	20

For More Details Scan QR Code



## AVIRA OPAL | 99740.000

MAGNETIC LINEAR LIGHT



IP40 CRI≥90 RoHS 50,000 Hrs | LM80 | B10

Meet Avira Linear, the Aluminium LED Magnetic Track light with Osram and Samsung power, Opal diffuser, and customizable finishes. Optional 120 degree beam angle, and Avira Linear's CCT ranges from 2700K to 6500K, providing versatile lighting in a sleek design.

### Related Family & Dimension

Power Rated	6W
Length (mm)	387
Width (mm)	20
Height (mm)	40
Power Rated	12W
Length (mm)	579
Width (mm)	20
Height (mm)	40
Power Rated	24W
Length (mm)	963
Width (mm)	20
Height (mm)	40

For More Details Scan QR Code



## AVIRA ADJ OPAL | 99730.000

MAGNETIC ADJUSTABLE LINEAR LIGHT



IP40 CRI≥90 RoHS 50,000 Hrs | LM80 | B10

Meet Avira Linear, the Aluminium LED Magnetic Track light with Osram and Samsung power, Opal diffuser, and customizable finishes. Optional 120-degree beam angle, and Avira Linear's CCT ranges from 2700K to 6500K, providing versatile lighting in a sleek design.

### Related Family & Dimension

Power Rated	10W
Length (mm)	195
Width (mm)	20

For More Details Scan QR Code



## AVIRA LINEAR | 99730.000

MAGNETIC CURVE LINEAR LIGHT



IP40 CRI≥90 RoHS 50,000 Hrs | LM80 | B10

Meet Avira Linear, the Aluminium LED Dot Curve Magnetic Track light with Osram and Samsung power, Opal diffuser, and customizable finishes. Optional 120-degree beam angle, and Avira Linear's CCT ranges from 2700K to 6500K, providing versatile lighting in a sleek design.

### Related Family & Dimension

Power Rated	20W
Length (mm)	337

For More Details Scan QR Code



## AVIRA PENDANT | 99690.000

MAGNETIC PENDANT LIGHT



IP40 CRI≥90 RoHS 50,000 Hrs | LM80 | B10

The Avira Pendant, the Aluminium LED Magnetic Track light with Osram and Samsung power, Opal diffuser, and customizable finishes. Optional 15 and 45 degree beam angle, and Avira Linear's CCT ranges from 2700K to 6500K, providing versatile lighting in a sleek design.

### Related Family & Dimension

Power Rated	10W
Diameter (mm)	55
Length (mm)	375


Power Rated	20W
Diameter (mm)	75
Length (mm)	375

For More Details Scan QR Code



## AVIRA TRACK

MAGNETIC LINEAR TRACK

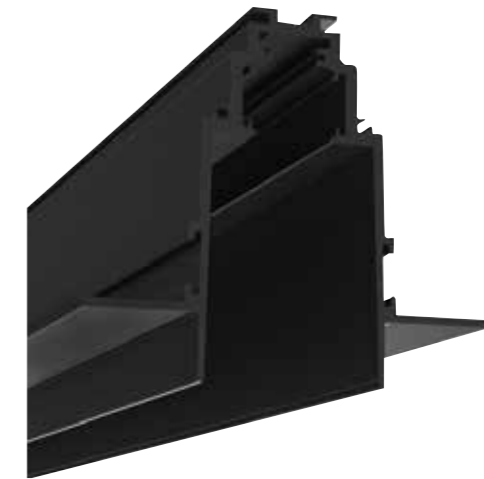

For More Details Scan QR Code



## AVIRA TRACK

CIRCULAR MAGNETIC TRACK



For More Details Scan QR Code





# PANEL LIGHTS

## SLIMPOINT | 97440.000

PRISMATIC PANEL LIGHT



IP44 CRI≥90 RoHS 50,000 Hrs | LM80 | B10

The Slimpoint is a durable and versatile LED prismatic panel light that provides bright, even illumination. It comes in a variety of sizes and reflectors to suit any need, and it has an elegant, silky trim.

### Related Family & Dimension

Power Rated	40W
Length (mm)	595
Width (mm)	595
Height (mm)	8

For More Details Scan QR Code



## ECOSLIM | 91720.000

PANEL LIGHT



IP44 CRI≥90 RoHS 50,000 Hrs | LM80 | B10

The Ecoslim is a durable and versatile LED panel light that provides bright, even illumination. It comes in a variety of sizes and reflectors to suit any need, and it has an elegant, silky trim.

### Related Family & Dimension

Power Rated	40W
Length (mm)	595
Width (mm)	595
Height (mm)	8

For More Details Scan QR Code



Power Rated	40W
Length (mm)	1200
Width (mm)	300
Height (mm)	8



Power Rated	40W/72W
Length (mm)	1200
Width (mm)	600
Height (mm)	8



## BRIGHTMOON | 93430.000

BACK-LIT PANEL LIGHT



IP40 CRI≥90 RoHS 50,000 Hrs | LM80 | B10

Brightmoon is a durable and versatile LED back-lit panel light that provides bright, even illumination. It comes in a variety of sizes and reflectors to suit any need and has an elegant silky trim.

### Related Family & Dimension

Power Rated	40W
Length (mm)	595
Width (mm)	595
Height (mm)	33

For More Details Scan QR Code



Power Rated	40W
Length (mm)	1195
Width (mm)	595
Height (mm)	26



## TEKTON | 92990.000

ANTI GLARE MODULAR LIGHT



IP44 CRI≥90 RoHS 30,000 Hrs | LM80 | B10

Tekton is a durable and versatile LED modular light that provides bright, even illumination with minimal glare in a variety of sizes and styles.

### Related Family & Dimension

Power Rated	36W
Length (mm)	298
Height (mm)	80

Power Rated	36W
Length (mm)	598
Height (mm)	110

For More Details Scan QR Code



## VELA | 96310.000

ANTI GLARE MODULAR LIGHT



IP40 CRI≥90 RoHS 50,000 Hrs | LM80 | B10

Vela is a durable and versatile LED modular light that provides bright, even illumination with minimal glare in a variety of sizes and styles.

### Related Family & Dimension

Power Rated	36W
Length (mm)	595
Width (mm)	595
Height (mm)	10

For More Details Scan QR Code



## RIPPLE | 98730.000

ANTI GLARE LOUVRE MODULAR LIGHT



IP44 CRI≥90 RoHS 50,000 Hrs | LM80 | B10

Ripple is a durable and versatile LED modular light that provides bright, even illumination with minimal glare. It comes in a variety of sizes and reflectors to suit any need, and it has an elegant, silky trim.

### Related Family & Dimension

Power Rated	36W
Length (mm)	600
Width (mm)	600
Height (mm)	21.8

For More Details Scan QR Code



## TURBO | 90380.000

ANTI GLARE PENDANT LIGHT



IP44 CRI≥85 RoHS 50,000 Hrs | LM80 | B10

Turbo is a well-crafted LED linear light that is designed to power up your space with timeless elegance and effortless vision protection. With its sleek design, anti-glare engineering, and high output illumination, Turbo is the perfect choice for anyone who wants to add a touch of luxury and sophistication to their space, without sacrificing comfort or versatility.

### Related Family & Dimension

Rated Power	40W
Length (mm)	1187
Width (mm)	276
Height (mm)	60

For More Details Scan QR Code



## LEVARA | 98390.000

ANTI GLARE PENDANT LIGHT



IP40 CRI≥90 RoHS 50,000 Hrs | LM80 | B10

Levara is a well-engineered LED linear pendant light that is designed to elevate your space with timeless elegance and smooth illumination. With its sleek design, anti-glare engineering, and high output illumination, Levara is the perfect choice for anyone who wants to add a touch of luxury and sophistication to their space, without sacrificing comfort or versatility.

### Related Family & Dimension

Rated Power	60W
Length (mm)	1150
Width (mm)	320
Height (mm)	17

For More Details Scan QR Code



## ECOSLIM | 91780.000

IP RATED PANEL LIGHT



IP65 CRI≥90 RoHS 50,000 Hrs | LM80 | B10

The Ecoslim is a durable and versatile LED IP rated panel light that provides bright, even illumination. It comes in a variety of sizes and reflectors to suit any need, and it has an elegant, silky trim.

### Related Family & Dimension

Power Rated	40W
Length (mm)	595
Width (mm)	595
Height (mm)	8

For More Details Scan QR Code



## MARIO R | 94410.000

PANEL LIGHT



IP40 CRI≥90 RoHS 50,000 Hrs | LM80 | B10

Mario R is a durable and versatile LED panel light that provides bright, even illumination in a variety of sizes and styles.

### Related Family & Dimension

Power Rated	15W
Length (mm)	300
Width (mm)	20
Power Rated	36W
Length (mm)	450
Width (mm)	20
Power Rated	40W
Length (mm)	600
Width (mm)	20

For More Details Scan QR Code



# TASK LIGHTS

## LUCA | 92700.000

TASK LIGHT



### Related Family & Dimension

Rated Power	3W
Diameter (mm)	31
Height (mm)	65

For More Details Scan QR Code



## SENNA II | 93320.000

TASK LIGHT



### Related Family & Dimension

Rated Power	2W
Diameter (mm)	42
Height (mm)	51

For More Details Scan QR Code



## KENZIE POLE | 92680.000


TASK LIGHT



### Related Family & Dimension

Rated Power	3 W
Height (mm)	390

For More Details Scan QR Code



## LUCA PLUS | 92700.000

MAGNETIC TASK LIGHT



### Related Family & Dimension

Rated Power	2W
Diameter (mm)	22
Height (mm)	33.4

For More Details Scan QR Code



## EYE FOCUS | 92970.000

TASK LIGHT



### Related Family & Dimension

Rated Power	2W
Diameter (mm)	28
Length (mm)	49
Height (mm)	200-450
Rated Power	2 X 2W
Diameter (mm)	28
Length (mm)	49
Height (mm)	200-450

For More Details Scan QR Code



## KENZIE | 92690.000

TASK LIGHT



### Related Family & Dimension

Rated Power	3 X 1W
Head	
Width (mm)	17
length (mm)	65
Height (mm)	12
Pole Head (mm)	8

For More Details Scan QR Code





# LINEAR LIGHTS

## SUPERLINE | 94960.000

LINEAR TRUNKING SYSTEM LIGHT



IP40 CRI≥90 RoHS 50,000 Hrs | LM80 | B10

Superline LED linear lights are like the sun on a cloudless day, but without the heat. They provide bright and even illumination, without being overwhelming. Superline linear lights are the perfect choice for any space where you want to create a bright and inviting atmosphere.

### Related Family & Dimension

Rated Power  
16W | 26W | 32W

Length (mm) 568

Rated Power  
40W | 65W | 70W | 80W

Length (mm) 1500

For More Details Scan QR Code



## LYONER | 96090.000

LINEAR TRUNKING SYSTEM LIGHT



IP40 CRI≥90 RoHS 50,000 Hrs | LM80 | B10

Lyoner is a well-crafted LED linear light that is designed to elevate your space with timeless elegance and enduring performance. With its sleek design, high output illumination, and smooth atmosphere, Lyoner casts a soft glow that highlights the beauty of your surroundings, creating a truly enchanting and inviting scene.

### Related Family & Dimension

Rated Power  
26W | 36W | 52W | 60W

Length (mm) 577  
1150  
1437

For More Details Scan QR Code



## CURVE SERIES | 94140.000

LINEAR CURVE LIGHT



IP40 CRI≥90 RoHS 50,000 Hrs | LM80 | B10

Curve Series is an architectural engineered LED linear light with performance to create a long lasting reliable product. This product provide high output illumination a smooth atmosphere. Curve Series is a good all rounder because of its range of sizes and reflectors. Easy to put together.


### Related Family & Dimension

Curve 40	
Width (mm)	40
Height (mm)	60
Curve 60	
Width (mm)	60
Height (mm)	80
Curve 70	
Width (mm)	70
Height (mm)	100
Curve 80	
Width (mm)	80
Height (mm)	100
Curve 100	
Width (mm)	100
Height (mm)	75

For More Details Scan QR Code




# COMPONENTS

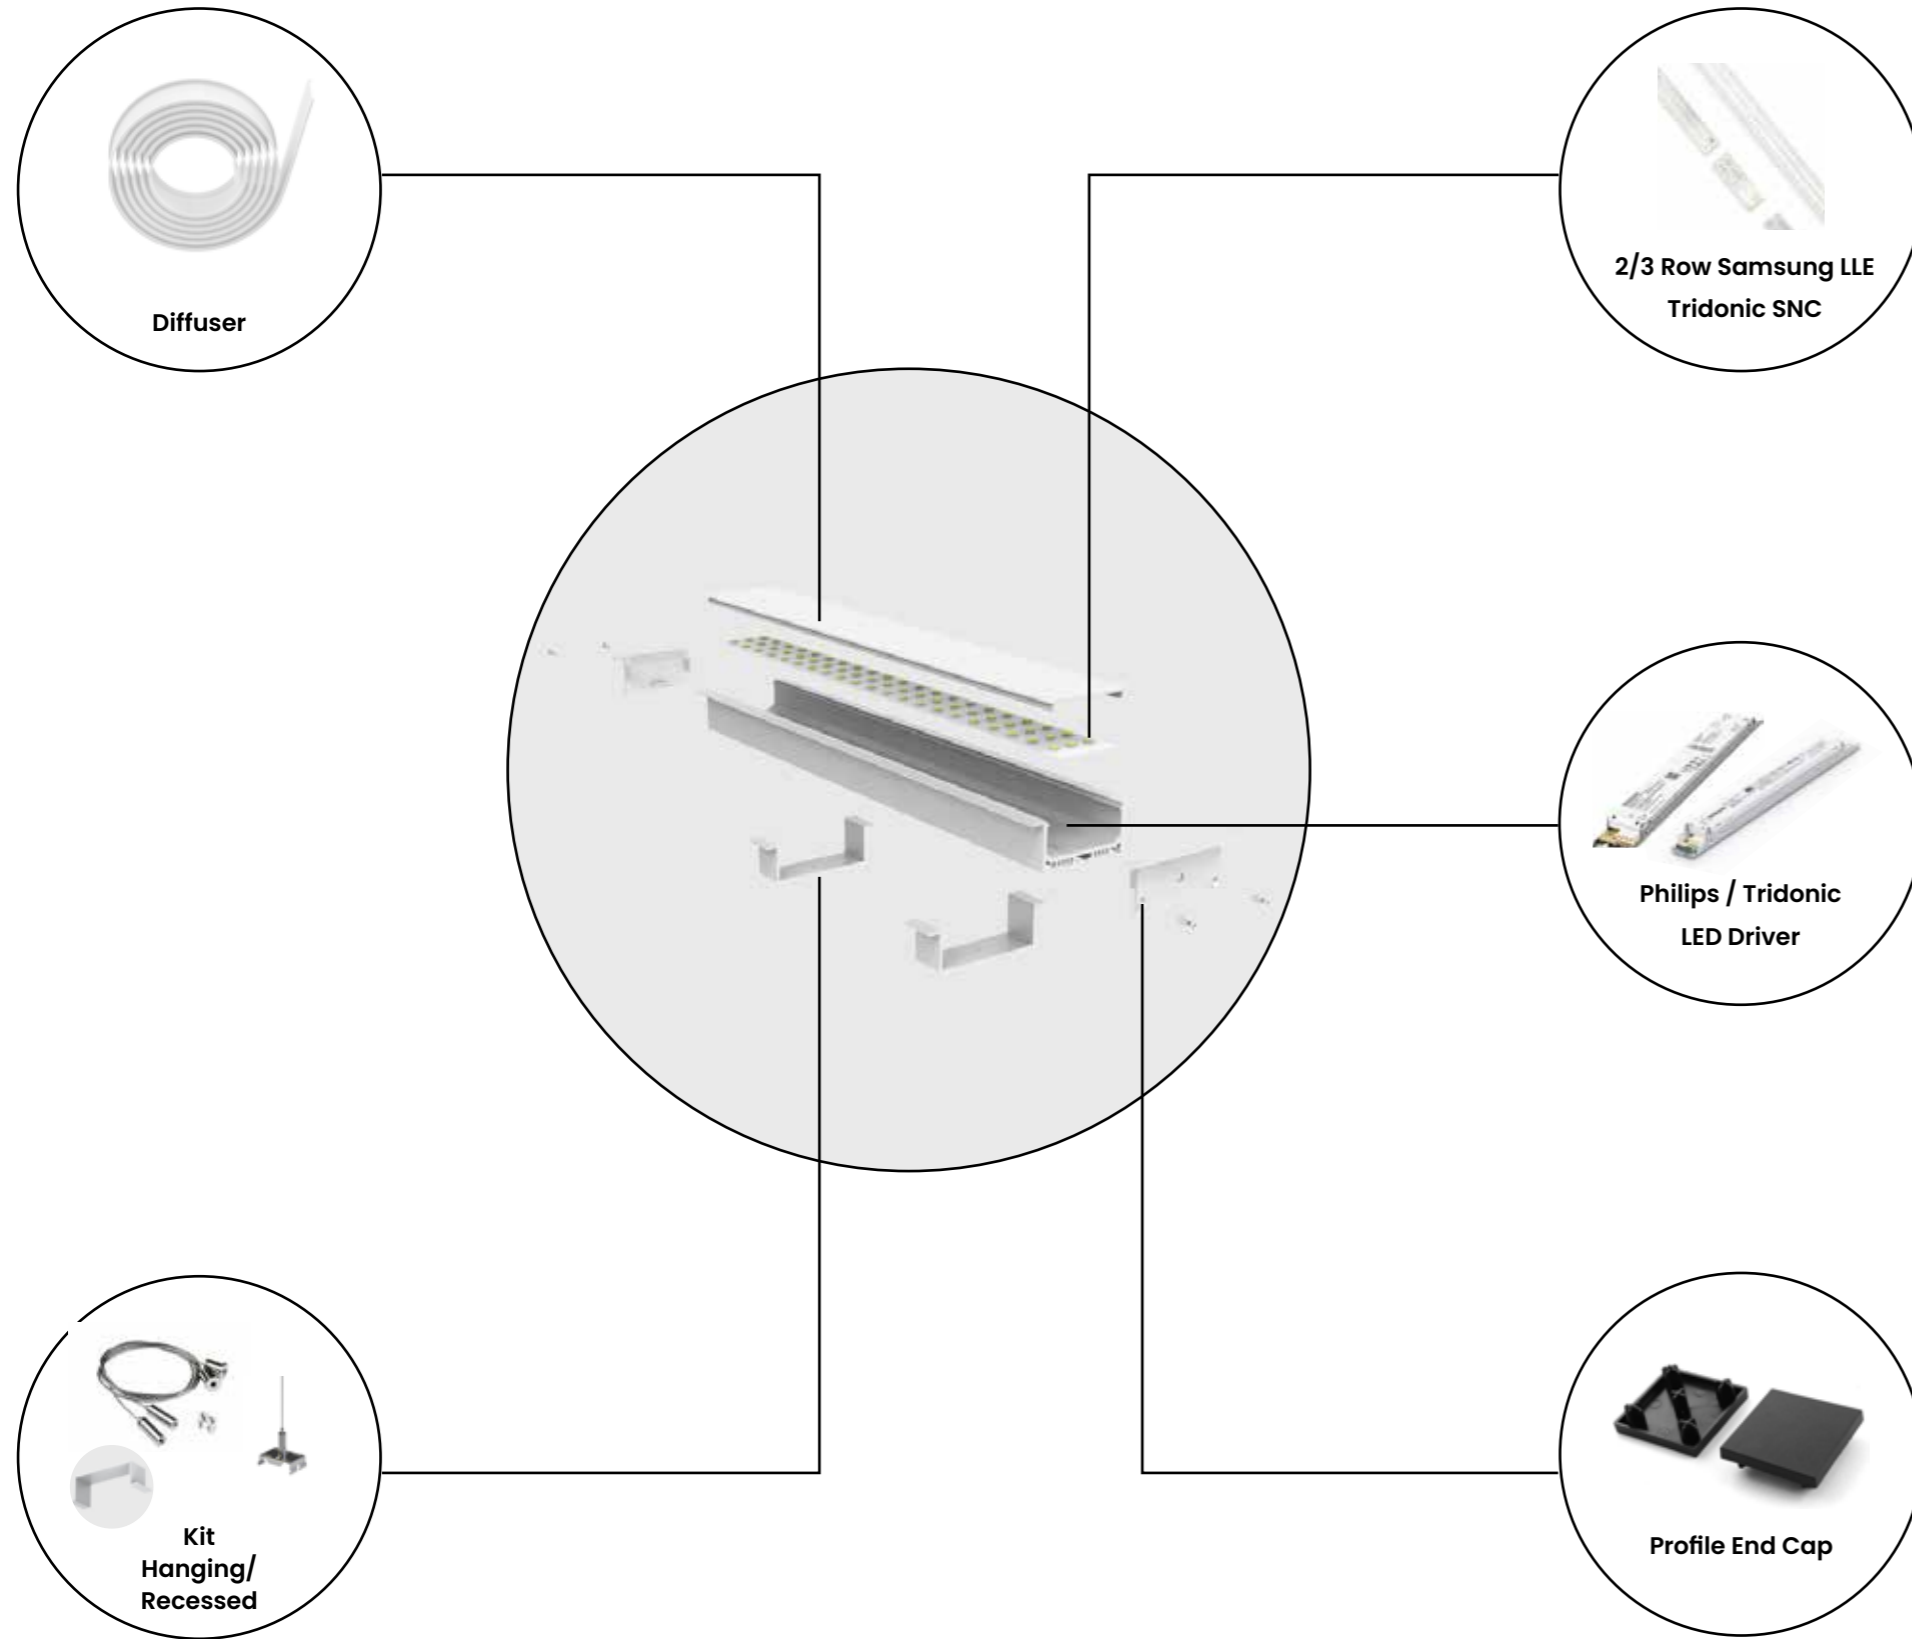

## LINEA 60 | 96940.000

TRIMLESS LINEAR LIGHT

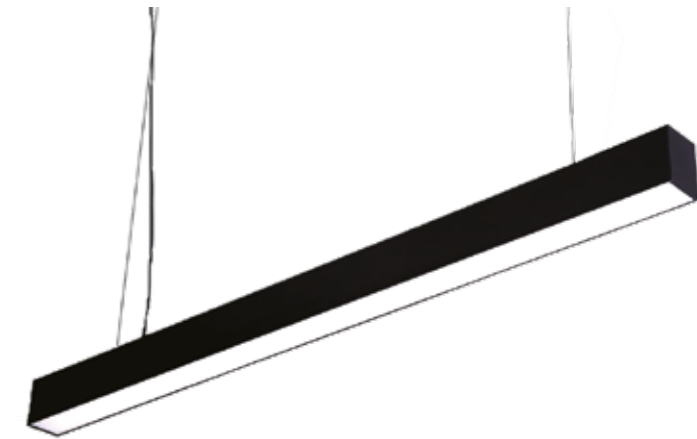

IP40 
 CRI≥90 
 RoHS 
 50,000 Hrs | LM80 | B10

Linea 60 LED linear lights are like the stars in the night sky. They add a touch of magic and wonder to any space, and they cast a soft glow that creates a sense of tranquillity and calm. Linea linear lights are the perfect choice for anyone who wants to create a space that is both visually appealing and functional.

### Related Family & Dimension

Rated Power  
Custom Range 14.5W to 58W Per Mtr


Width (mm)	60
Height (mm)	70

For More Details Scan QR Code



## TL AP 5050 | 95000.000

LINEAR LIGHT

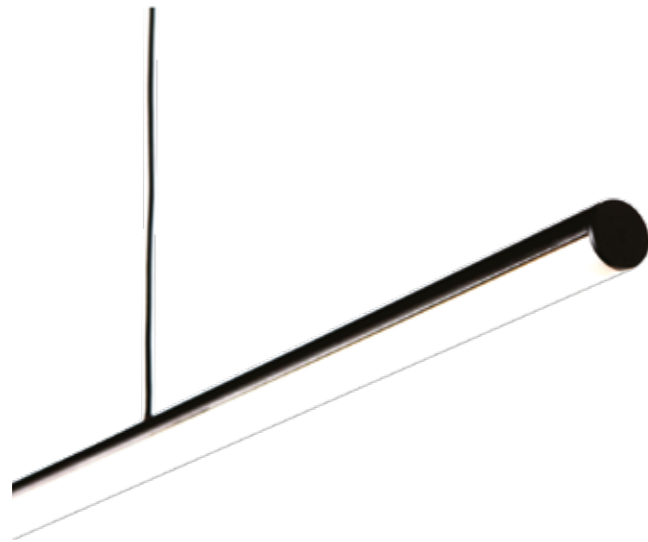

IP40 CRI≥90 RoHS 30,000 Hrs | LM80 | B10

TL AP 5050 is a round well-crafted LED linear light that is designed to elevate your space with timeless elegance and enduring performance. With its sleek design, high output illumination, and smooth atmosphere, TL AP 5050 casts a soft glow that highlights the beauty of your surroundings, creating a truly enchanting and inviting scene.

### Related Family & Dimension


Rated Power	14.4W/Mtr
Diameter (mm)	50
Width (mm)	50

For More Details Scan QR Code



## TL AP 5035 | 90400.000

TRIM LINEAR LIGHT

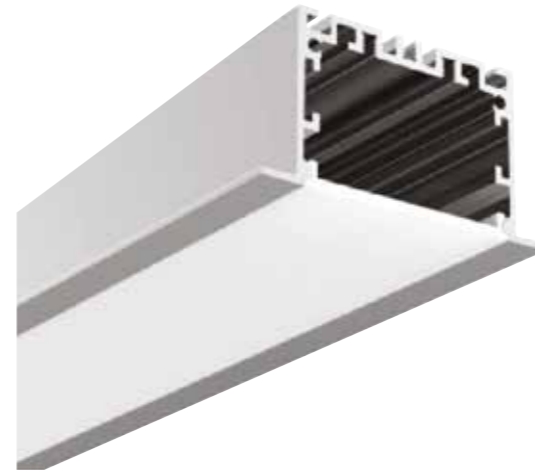

IP40 CRI≥90 RoHS 50,000 Hrs | LM80 | B10

TL AP 5035 is the perfect choice for anyone who wants to add a touch of luxury and sophistication to their space, without sacrificing versatility or durability. It is available in a range of sizes and reflectors, making it ideal for a wide range of indoor and outdoor spaces. It is also easy to install and maintain, making it a practical and functional choice for any commercial or residential setting.

### Related Family & Dimension

Rated Power	Custom Range 14.5W to 58W Per Mtr
Width (mm)	50
Height (mm)	35

For More Details Scan QR Code



## TL AP 6736 | 90670.000

TRIM LINEAR LIGHT



IP40 CRI≥90 RoHS 50,000 Hrs | LM80 | B10

TL AP 6736 LED linear lights are like the Milky Way galaxy.. They provide soft and even illumination, while also revealing the hidden beauty of your surroundings. TL AP 6736 linear lights are the perfect choice for anyone who wants to create a space that is both visually appealing and awe-inspiring.

### Related Family & Dimension

Rated Power	Custom Range 14.5W to 58W Per Mtr
Width (mm)	67
Height (mm)	36

For More Details Scan QR Code



## LINEA 35 | 93270.000

TRIMLESS LINEAR LIGHT



### Related Family & Dimension

For More Details Scan QR Code

Rated Power  
Custom Range 14.5W to 58W Per Mtr

Width (mm) 35  
Height (mm) 37



## TOWER 40 | 95000.000

TRIMLESS UP & DOWN LINEAR LIGHT



### Related Family & Dimension


For More Details Scan QR Code

Rated Power 2 X 20W  
Width (mm) 38  
Height (mm) 123



## PROLINE 50

TRIMLESS LINEAR LIGHT

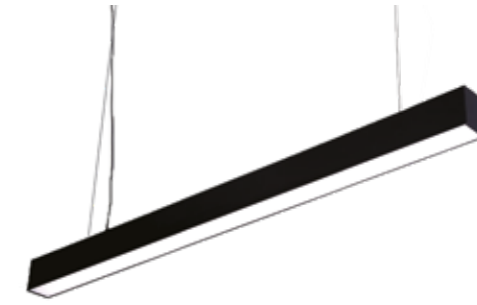

### Related Family & Dimension

For More Details Scan QR Code

Rated Power  
Custom Range 14.5W to 58W Per Mtr

Width (mm) 50  
Height (mm) 75



## LINEA 40 | 94140.000

TRIMLESS LINEAR LIGHT



### Related Family & Dimension

For More Details Scan QR Code

Rated Power  
Custom Range 14.5W to 58W Per Mtr

Width (mm) 40  
Height (mm) 35



## TOWER 50

TRIMLESS LINEAR LIGHT



### Related Family & Dimension

For More Details Scan QR Code

Rated Power  
Custom Range 14.5W to 58W Per Mtr

Width (mm) 50  
Height (mm) 75



## ROLO | 97960.000

TRIMLESS UP & DOWN LINEAR LIGHT



### Related Family & Dimension

For More Details Scan QR Code

Rated Power 20W  
Length (mm) 1200  
Width (mm) 60  
Height (mm) 70

Rated Power 40W  
Length (mm) 1500  
Width (mm) 68  
Height (mm) 130



## TOWER 67 | 97880.000

TRIMLESS LINEAR LIGHT



### Related Family & Dimension

Rated Power  
Custom Range 14.5W to 58W Per Mtr

Width (mm) 34  
Height (mm) 67

For More Details Scan QR Code



## SALA HP | 96880.000

TRIMLESS LINEAR LIGHT



### Related Family & Dimension

Rated Power  
Custom Range 14.5W to 58W Per Mtr


Width (mm) 90  
Height (mm) 100

For More Details Scan QR Code



## LINEA 96 | 97550.000

TRIM LINEAR LIGHT

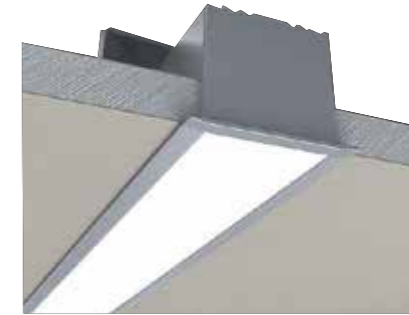

### Related Family & Dimension

Rated Power  
Custom Range 14.5W to 58W Per Mtr

Width (mm) 96  
Height (mm) 35

For More Details Scan QR Code



## WITRA HP | 96860.000

TRIMLESS LINEAR LIGHT



### Related Family & Dimension

Rated Power  
Custom Range 14.5W to 58W Per Mtr

Width (mm) 68  
Height (mm) 80

For More Details Scan QR Code



## SALA RC | 96890.000

TRIM LINEAR LIGHT



### Related Family & Dimension

Rated Power  
Custom Range 14.5W to 58W Per Mtr

Width (mm) 112  
Height (mm) 100

For More Details Scan QR Code



## LINEA 200 | 99760.000

TRIM LINEAR LIGHT



### Related Family & Dimension

Rated Power  
Custom Range 14.5W to 58W Per Mtr

Width (mm) 200  
Height (mm) 35

For More Details Scan QR Code



## WITRA RC | 96870.000

TRIM LINEAR LIGHT



### Related Family & Dimension

Rated Power  
Custom Range 14.5W to 58W Per Mtr

Width (mm) 90  
Height (mm) 80

For More Details Scan QR Code



## TLAP 1212 | 95000.000

ALUMINIUM LINEAR PROFILE



### Related Family & Dimension


Width (mm) 12  
Height (mm) 12

For More Details Scan QR Code



## TL AP 1307 | 95000.000

ALUMINIUM LINEAR PROFILE

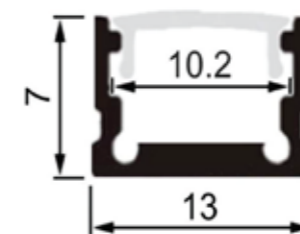

For More Details Scan QR Code



## LINEA 65 | 90660.000

TRIM LINEAR LIGHT



### Related Family & Dimension

Rated Power  
Custom Range 14.5W to 58W Per Mtr

Width (mm) 65  
Height (mm) 35

For More Details Scan QR Code



## LIVIA | 93350.000

TRIM LINEAR LIGHT



### Related Family & Dimension

Rated Power  
Custom Range 14.5 to 58W Per Mtr


Length (mm) 1500  
Width (mm) 125  
Height (mm) 95

For More Details Scan QR Code



## TLAP 4912 | 95000.000

ALUMINIUM INDIRECT LINEAR PROFILE

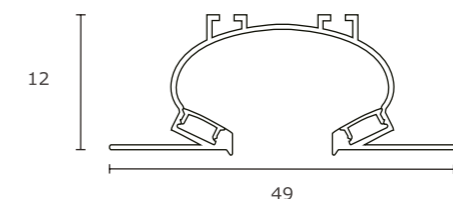


For More Details Scan QR Code



## TLAP 1208 | 95000.000

ALUMINIUM LINEAR PROFILE

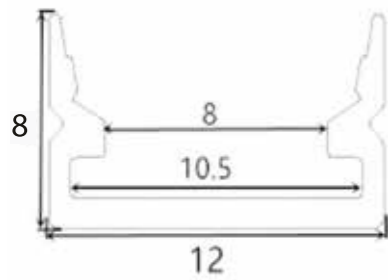


For More Details Scan QR Code



## TL AP 4918 | 95000.000

ALUMINIUM LINEAR PROFILE

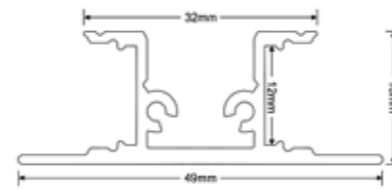


For More Details Scan QR Code




## TLAP 1408 | 95000.000

ALUMINIUM LINEAR PROFILE

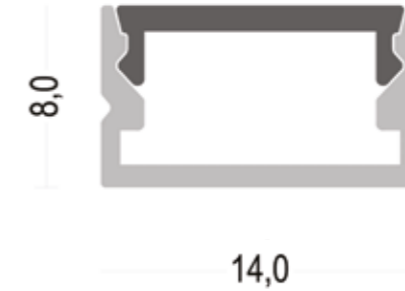


For More Details Scan QR Code



## TLAP 1207 | 95000.000

ALUMINIUM LINEAR PROFILE

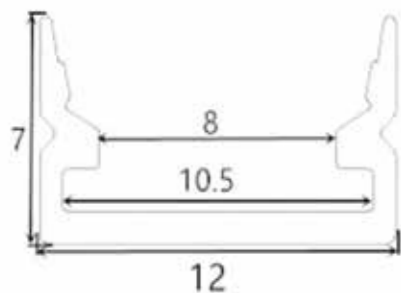


For More Details Scan QR Code



## TLAP 2119 SQ | 90410.000

ALUMINIUM LINEAR PROFILE

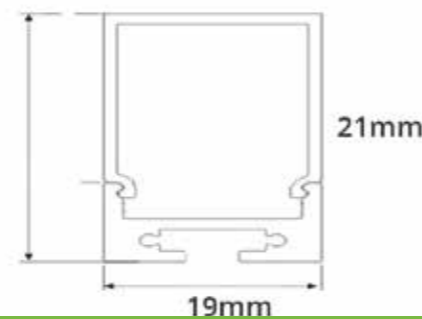


For More Details Scan QR Code



## TLAP 1612 | 95000.000

ALUMINIUM LINEAR PROFILE



For More Details Scan QR Code




## TLAP 1715 | 95000.000

ALUMINIUM LINEAR PROFILE



For More Details Scan QR Code

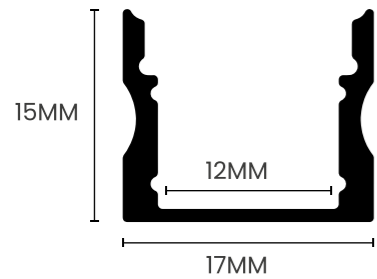


## TLAP 1806 | 95000.000

ALUMINIUM LINEAR PROFILE



For More Details Scan QR Code




## TLAP 2013 | 95000.000

ALUMINIUM LINEAR PROFILE



For More Details Scan QR Code

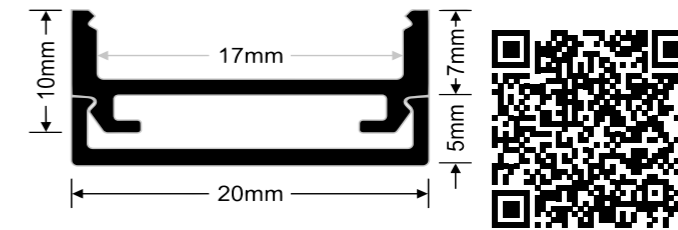


## TLAP 1614 | 95000.000

ALUMINIUM LINEAR PROFILE



For More Details Scan QR Code

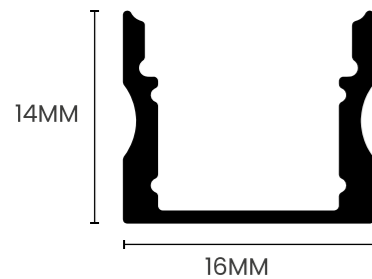

## TLAP 2310 | 95000.000

ALUMINIUM LINEAR PROFILE



For More Details Scan QR Code




## TLAP 3030 SQ | 95000.000

ALUMINIUM LINEAR PROFILE



For More Details Scan QR Code

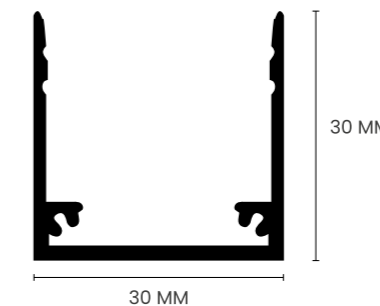


## TLAP 1707 | 95000.000

ALUMINIUM LINEAR PROFILE



For More Details Scan QR Code

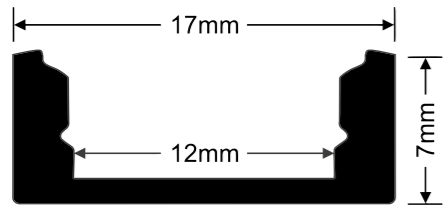


## TLAP 2015 | 95000.000

ALUMINIUM LINEAR PROFILE



For More Details Scan QR Code

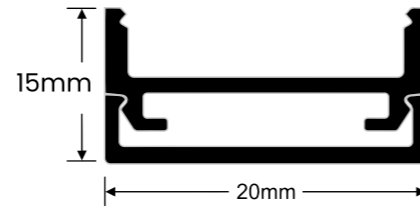


## TLAP 3030C | 95000.000

ALUMINIUM CORNER LINEAR PROFILE




For More Details Scan QR Code




## TLAP 0712 | 95000.000

ALUMINIUM LINEAR PROFILE

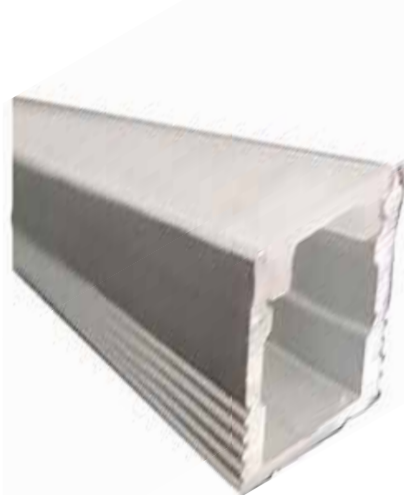

For More Details Scan QR Code



12MM



7MM


**TECNOLIGHT**<sup>®</sup>  
the Art of illumination

## TLAP 1919F | 95010.000

ALUMINIUM CORNER LINEAR PROFILE



For More Details Scan QR Code

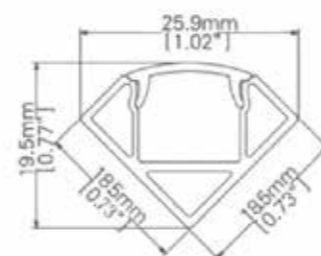


## TLAP 1616 | 95000.000

ALUMINIUM CORNER LINEAR PROFILE



For More Details Scan QR Code





## TLAP 2507 | 95000.000

ALUMINIUM LINEAR PROFILE



For More Details Scan QR Code

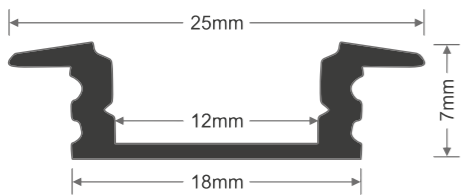


## TLAP 2119 R | 33300.000

ALUMINIUM LINEAR PROFILE



For More Details Scan QR Code




## TLAP 6528 | 95000.000

ALUMINIUM STEP PROFILE



For More Details Scan QR Code

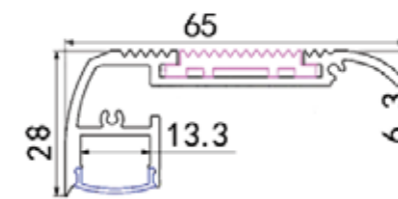


## TLAP 2515 | 95000.000

ALUMINIUM LINEAR PROFILE



For More Details Scan QR Code

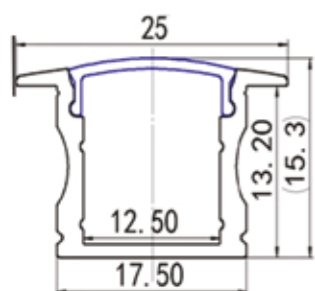


## TLAP 2226G | 97220.000

ALUMINIUM LINEAR IP RATED PROFILE



For More Details Scan QR Code

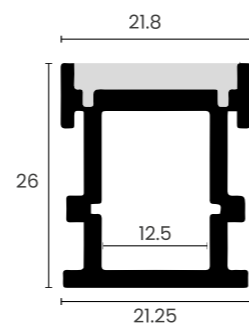



# STRIP LIGHTS

## POWERFLEX 2110 | 99840.000

STRIP LIGHT



### Related Family & Dimension

Rated Power	7.2W/Mtr
Length(mm)	5000
Width (mm)	5

For More Details Scan QR Code



## POWERFLEX 2835 | 98110.000

STRIP LIGHT



### Related Family & Dimension

Rated Power	4.8W/Mtr
	9.6W/Mtr
	14.4W/Mtr
Length(mm)	5000
Width (mm)	8

For More Details Scan QR Code



## POWERFLEX 3527 RGBW | 92410.000

STRIP LIGHT (RGBW + 6000K)



### Related Family & Dimension

Rated Power	19.2W/Mtr
Length(mm)	5000
Width (mm)	10

For More Details Scan QR Code



## POWERFLEX 3527 | 98170.000

TUNABLE STRIP LIGHT



### Related Family & Dimension

Rated Power	19.2W/Mtr
Length(mm)	5000
Width (mm)	10

For More Details Scan QR Code



## LUMIFLEX 2824 ZIGZAG | 87090.000

STRIP LIGHT



### Related Family & Dimension

Rated Power	7.2W/Mtr
Length(mm)	5000
Width (mm)	8

For More Details Scan QR Code



## POWERFLEX 3838 | 97350.000


RGB STRIP LIGHT



### Related Family & Dimension

Rated Power	9.6W/Mtr
	14.4W/Mtr
Length(mm)	5000
Width (mm)	10

For More Details Scan QR Code



## POWERFLEX 5050 | 92360.000

STRIP LIGHT



### Related Family & Dimension

Rated Power 14.4W/Mtr  
Length(mm) 5000  
Width (mm) 8

For More Details Scan QR Code



## POWERFLEX 5050 RGBW | 92360.000

STRIP LIGHT



### Related Family & Dimension


Rated Power 19.2W/Mtr  
Length(mm) 5000  
Width (mm) 10

For More Details Scan QR Code



## POWERFLEX 5050 BLUE | 93260.000


STRIP LIGHT

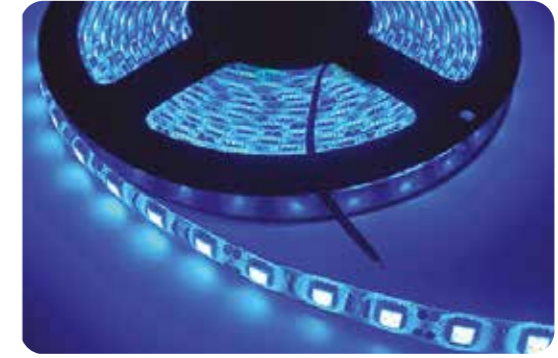

### Related Family & Dimension

Rated Power 12W/Mtr  
Length(mm) 5000  
Width (mm) 8

For More Details Scan QR Code



## POWERFLEX 2835 BLUE | 93630.000

STRIP LIGHT



### Related Family & Dimension

Rated Power 9.6W/Mtr  
Length(mm) 5000  
Width (mm) 8

For More Details Scan QR Code



## POWERFLEX 2835 PINK | 93630.000

STRIP LIGHT



### Related Family & Dimension

Rated Power 9.6W/Mtr  
Length(mm) 5000  
Width (mm) 8

For More Details Scan QR Code



## POWERFLEX 2835 RED | 93630.000

STRIP LIGHT



### Related Family & Dimension

Rated Power 9.6W/Mtr  
Length(mm) 5000  
Width (mm) 8

For More Details Scan QR Code



## LUMIFLEX 2812 | 87070.000

STRIP LIGHT



### Related Family & Dimension

Rated Power	4.8W/Mtr 9.6W/Mtr 12W/Mtr
Length(mm)	5000
Width (mm)	10

For More Details Scan QR Code



## LUMIFLEX 2835 | 87070.000

STRIP LIGHT



### Related Family & Dimension

Rated Power	4.8W/Mtr 9.6W/Mtr 12W/Mtr
Length(mm)	5000
Width (mm)	10

For More Details Scan QR Code



## VALUE FLEX 2835 | 92390.000

TUNABLE STRIP LIGHT



### Related Family & Dimension

Rated Power	8.6W/Mtr
Length(mm)	5000
Width (mm)	10

For More Details Scan QR Code



## VALUE FLEX 2835 | 92390.000

STRIP LIGHT



### Related Family & Dimension

Rated Power	8.6W/Mtr
Length(mm)	5000
Width (mm)	10

For More Details Scan QR Code



Rated Power	28.4W/Mtr
Length(mm)	3000
Width (mm)	10

## FLEX 3528 | 92410.000

RED STRIP LIGHT



### Related Family & Dimension

Rated Power	6W/Mtr
Length(mm)	5000
Width (mm)	10

For More Details Scan QR Code



## LUMI COB | 92350.000

STRIP LIGHT



### Related Family & Dimension

Rated Power	10W/Mtr
Length(mm)	5000
Width (mm)	8

For More Details Scan QR Code



## FLEX 3528 | 92410.000

STRIP LIGHT



### Related Family & Dimension

Rated Power	6W/Mtr
Length(mm)	5000
Width (mm)	10

For More Details Scan QR Code



## POWERFLEX 5050 RGB | 93620.000

LED STRIP LIGHT



### Related Family & Dimension

Rated Power	14.4W/Mtr
Length(mm)	5000
Width (mm)	8

For More Details Scan QR Code



## PIXEL 5050 | 98850.000

STRIP LIGHT



### Related Family & Dimension

Rated Power	14.4W/Mtr
Length(mm)	5000
Width (mm)	10

For More Details Scan QR Code



## POWERFLEX 2835 IP | 93630.000

IP RATED STRIP LIGHT

IP65



### Related Family & Dimension

Rated Power	4.8W/Mtr
	9.6W/Mtr
	14.4W/Mtr
Length(mm)	5000
Width (mm)	8

For More Details Scan QR Code



## ULTIMO NEON 2525 | 92350.000

SIDE BEND NEONFLEX

IP65



### Related Family & Dimension

Rated Power	16W/Mtr
Width(mm)	25
Height (mm)	25

For More Details Scan QR Code



## ULTIMO NEON 5050 | 96610.000

SIDE BEND NEONFLEX

IP65



### Related Family & Dimension

Rated Power	19.2W/Mtr
Width(mm)	50
Height (mm)	50

For More Details Scan QR Code



## ULTIMO NEON 1616 | 97360.00

TOP BEND NEONFLEX

IP65



### Related Family & Dimension

Rated Power	4.8W/Mtr
Width(mm)	16
Height (mm)	16
Rated Power	8W/Mtr
Width(mm)	16
Height (mm)	16
Rated Power	14.4W/Mtr
Width(mm)	16
Height (mm)	16

For More Details Scan QR Code



## NEONFLEX 2836 | 98340.000

NEONFLEX 360



### Related Family & Dimension

Rated Power	9W/Mtr
Length(mm)	5000
Width (mm)	25

For More Details Scan QR Code



# FRAME & BULB



## ATLANTIC S | 95880.000

TRIMLESS FRAME



### Related Family & Dimension

Width(mm)	120
Length (mm)	120
Height (mm)	55

For More Details Scan QR Code



## ZARA PRIME | 96290.000

TRIMLESS FRAME



### Related Family & Dimension

Length(mm)	160
Width (mm)	160

For More Details Scan QR Code



## ATLANTIC R | 95880.000

TRIMLESS FRAME



### Related Family & Dimension

Width(mm)	130
Height (mm)	45

For More Details Scan QR Code



## TESIS | 90320.000

TRIMLESS FRAME



### Related Family & Dimension

Diameter(mm)	81
Height (mm)	51

For More Details Scan QR Code



## MORSEL R | 95180.000

ADJUSTABLE FRAME



### Related Family & Dimension

Diameter(mm)	80
--------------	----

For More Details Scan QR Code



## MORSEL PRIME | 93960.000

ADJUSTABLE FRAME



### Related Family & Dimension

Diameter(mm)	85
Surface Cutout (mm)	75

For More Details Scan QR Code



## LIVA | 90550.000

ANTIGLARE FRAME



### Related Family & Dimension

Length(mm)	110
Width (mm)	110
Surface Cutout (mm)	100

For More Details Scan QR Code



## MORSEL S | 95180.000

ADJUSTABLE FRAME



### Related Family & Dimension

Width(mm)	80
Length (mm)	80

For More Details Scan QR Code



## COMFO | 95250.000

FRAME



### Related Family & Dimension

Length(mm)	90
Width (mm)	50
Surface Cutout (mm)	75

For More Details Scan QR Code



## MORSEL ROUND | 95190.000

IP RATED FRAME



### Related Family & Dimension

Diameter(mm)	80
Surface Cutout (mm)	70

For More Details Scan QR Code



## MORSEL SQUARE | 95180.000

IP RATED FRAME



### Related Family & Dimension

Length(mm)	80
Width (mm)	80
Surface Cutout (mm)	70

For More Details Scan QR Code



## STAR LED | 90051.000

E27 LED MODULE



### Related Family & Dimension

Rated Power	12W
Diameter(mm)	72
Height (mm)	137
Rated Power	15W
Diameter(mm)	72
Height (mm)	137
Rated Power	23W
Diameter(mm)	95
Height (mm)	125

For More Details Scan QR Code



## FILAMENTO | 94420.000

E27 ST64 LED MODULE



### Related Family & Dimension

Rated Power	4W
Diameter(mm)	72
Height (mm)	137
Rated Power	8W
Diameter(mm)	72
Height (mm)	137
Rated Power	12W
Diameter(mm)	72
Height (mm)	137

For More Details Scan QR Code



## FILAMENTO | 94440.000

E27 G125 LED MODULE



### Related Family & Dimension

Rated Power	4W
Diameter(mm)	125
Height (mm)	175
Rated Power	8W
Diameter(mm)	125
Height (mm)	175

For More Details Scan QR Code



## FILAMENTO | 90080.000

E27 A60 LED MODULE



### Related Family & Dimension

Rated Power	4W
Diameter(mm)	60
Height (mm)	105
Rated Power	6W
Diameter(mm)	60
Height (mm)	105
Rated Power	8W
Diameter(mm)	60
Height (mm)	105

For More Details Scan QR Code



## CAMETA | 90030.000

AR111 LED MODULE



### Related Family & Dimension

Rated Power	15W
Diameter(mm)	110
Height (mm)	49

For More Details Scan QR Code



## CAMETA | 90030.000

ROCKET MR16 LED MODULE



### Related Family & Dimension

Rated Power	8.5W
Diameter(mm)	47
Height (mm)	52
Rated Power	13W
Diameter(mm)	47
Height (mm)	65

For More Details Scan QR Code



## ESSENTIAL | 90530.000

GU10 LED MODULE




### Related Family & Dimension

Rated Power	6W
Diameter(mm)	50
Height (mm)	54
Rated Power	6.5W
Diameter(mm)	50
Height (mm)	55.6

For More Details Scan QR Code



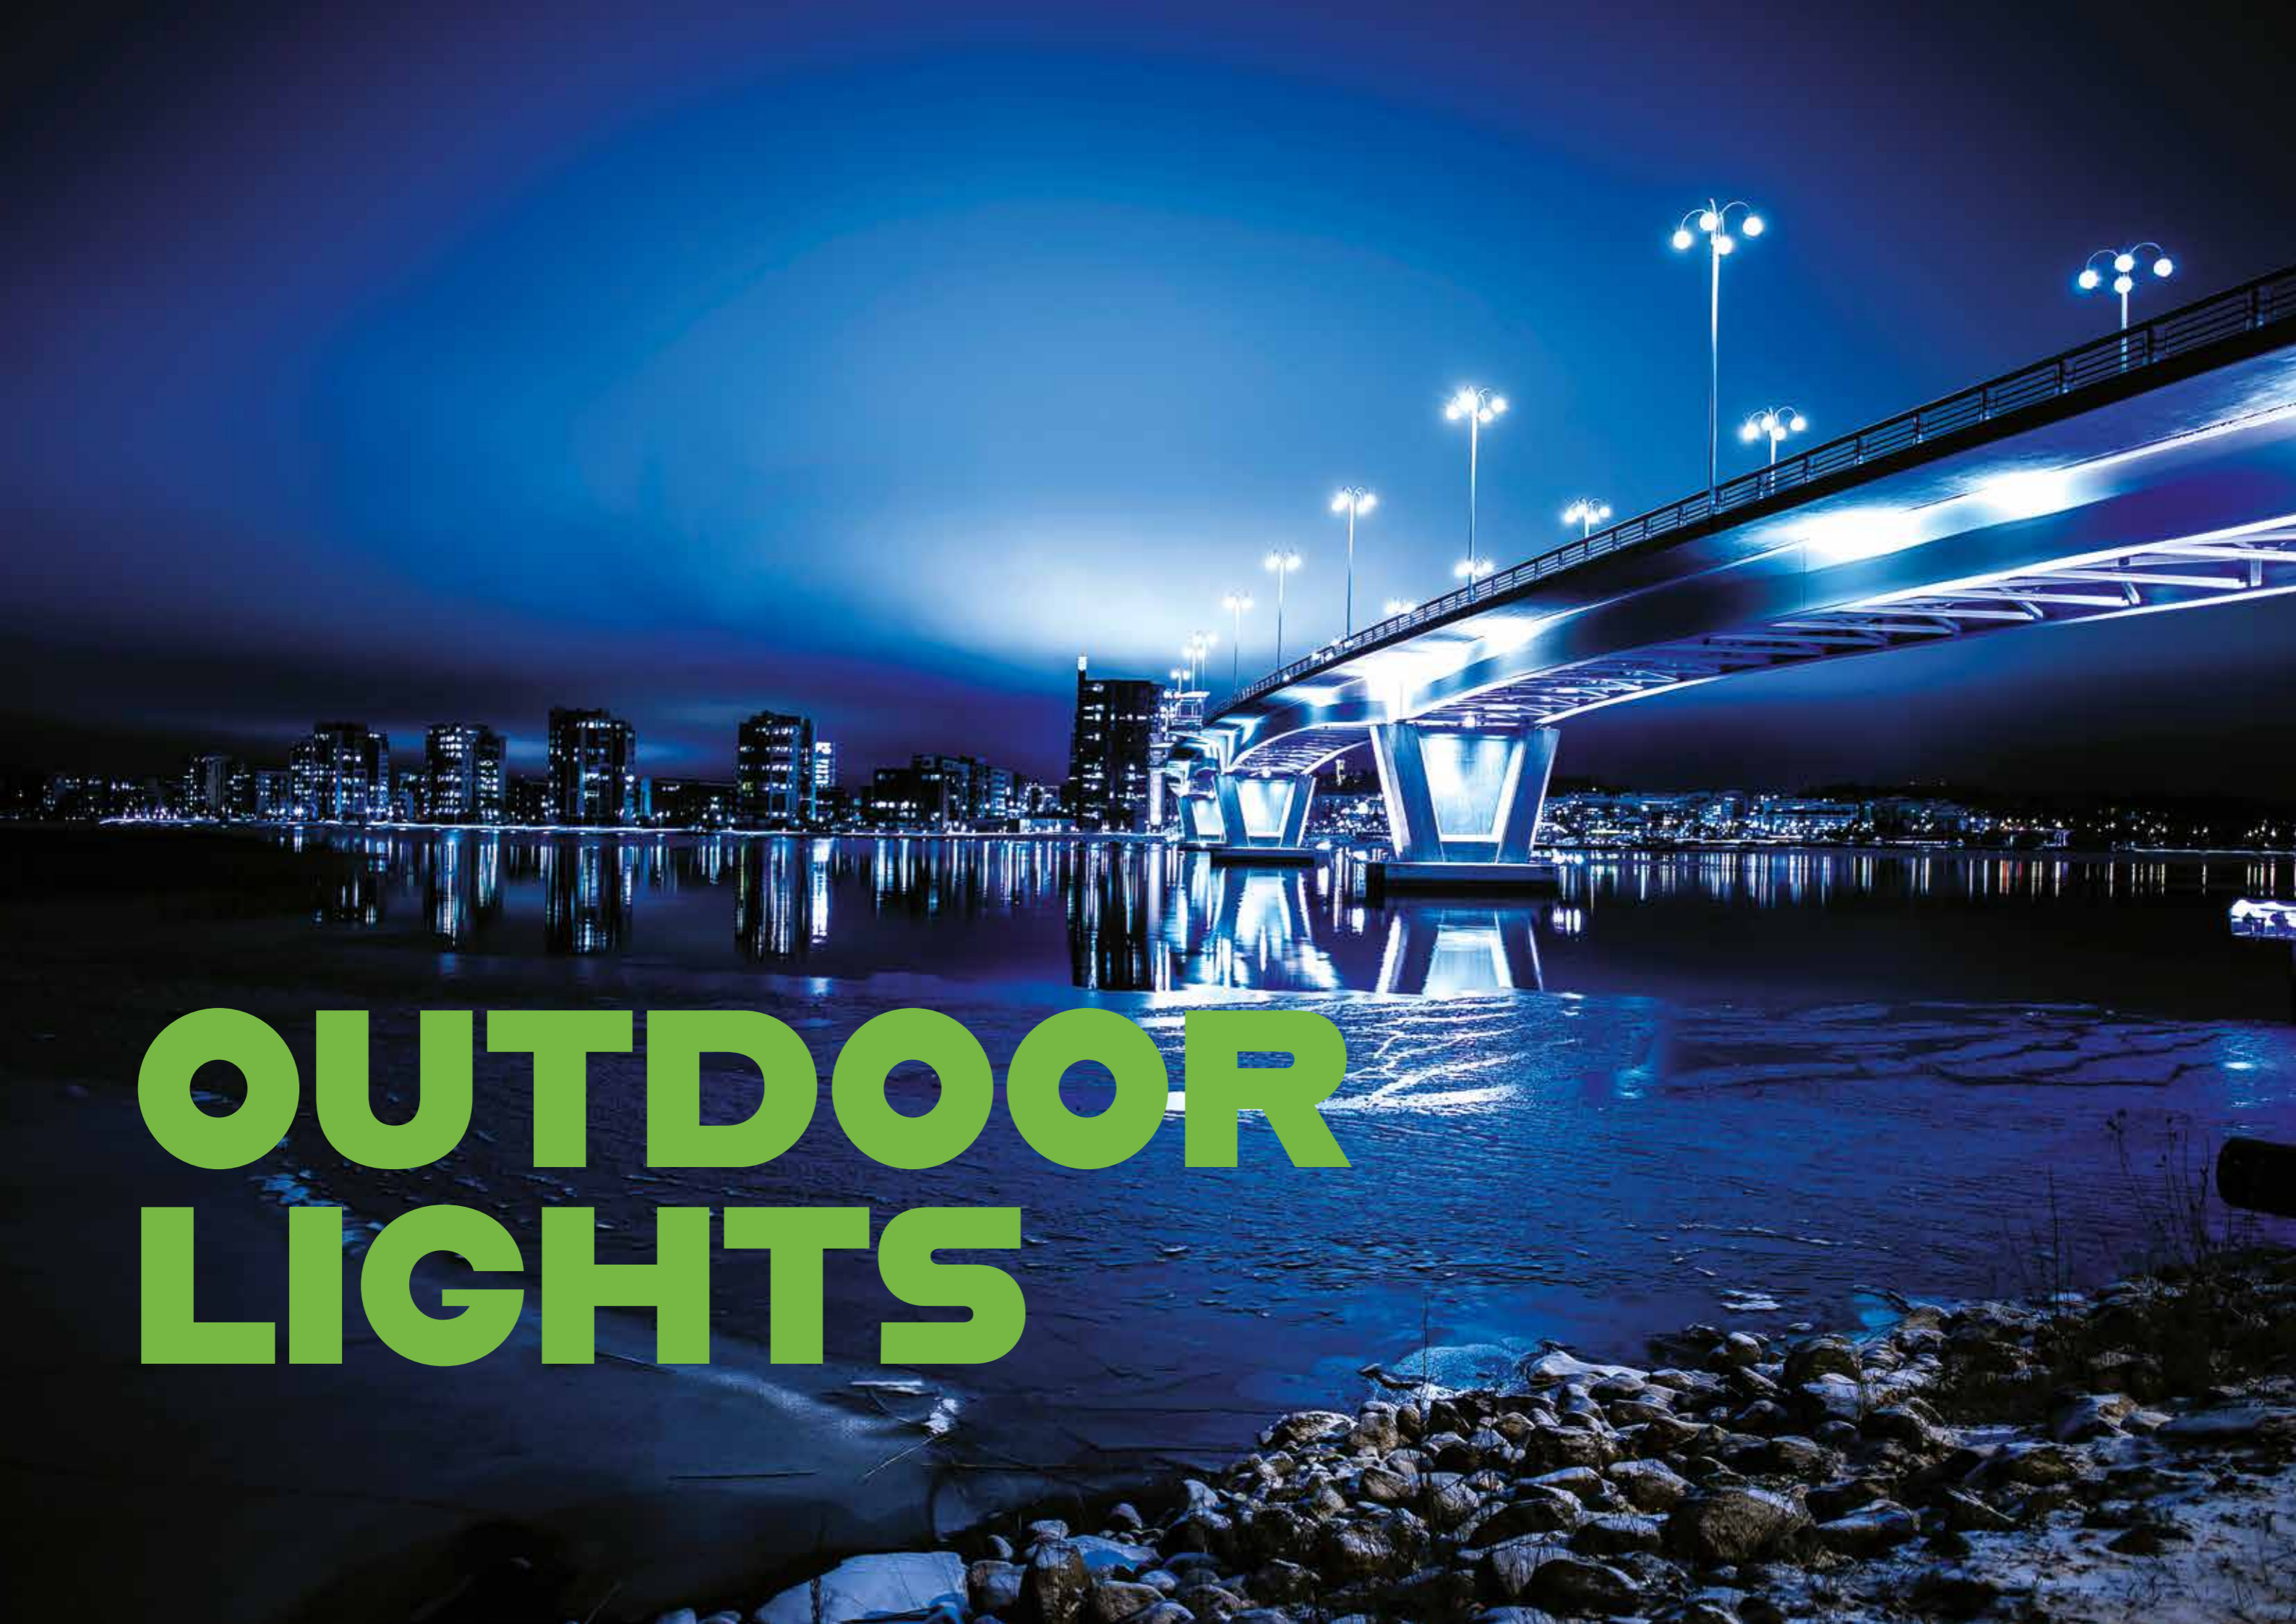

# OUTDOOR LIGHTS

## HYDRO FLOOR RING | 99700.000

IN-GROUND LIGHT



IP67 CRI≥90 30,000 Hrs | LM80 | B10 IK08

Meet Hydro Floor Ring, a Cree-powered in-ground light with die-cast aluminium and optic glass diffuser. Customize its sleek grey finish. Hydro Floor Ring offers a wide 120-degree beam angle and customizable color temperatures from 2700K to 6500K, effortlessly blending style and functionality for your outdoor space.

### Related Family & Dimension

Rated Power	2W
Diameter (mm)	42
Height (mm)	40

For More Details Scan QR Code



## HADI | 92250.000

IN-GROUND LIGHT



IP67 CRI≥90 30,000 Hrs | LM80 | B10 IK08

Meet Hadi, a Cree-powered in-ground light with die-cast aluminium construction. Featuring an optic lens diffuser and a sleek stainless steel finish, Hadi offers versatile illumination with beam angles of 15, 20, and 30 degrees. Customize the ambiance with color temperatures from 2700K to 6500K, seamlessly blending style and functionality for your outdoor space.

### Related Family & Dimension

Rated Power	3W
Diameter (mm)	40
Height (mm)	41

For More Details Scan QR Code



## FLORI | 96060.000

IN-GROUND LIGHT



IP67 CRI≥90 30,000 Hrs | LM80 | B10 IK08

Introducing Flori, a Cree-powered in-ground light with die-cast aluminium construction and a tempered glass diffuser. The stainless steel finish adds sophistication to outdoor spaces. Flori offers a wide 120-degree beam angle, customizable color temperatures from 2700K to 6500K, effortlessly blending style and functionality.

### Related Family & Dimension

Rated Power	3W
Diameter (mm)	40
Height (mm)	53

For More Details Scan QR Code



## IRIS | 96050.000

IN-GROUND LIGHT



IP67 CRI≥90 30,000 Hrs | LM80 | B10 IK08

Introducing Iris, a Cree-powered in-ground light with die-cast aluminium and a durable tempered glass diffuser. Customize its sleek stainless steel finish to match your style. Iris offers focused illumination with a 25-degree beam angle and customizable color temperatures from 2700K to 6500K, seamlessly blending style and functionality for your outdoor space.

### Related Family & Dimension

Rated Power	3W
Diameter (mm)	54
Height (mm)	72

For More Details Scan QR Code



## TERRA | 96210.000

IN-GROUND LIGHT



IP67 CRI≥90 30,000 Hrs | LM80 | B10 IK08

Meet Terra, a Cree-powered in-ground light with die-cast aluminium and a tempered glass diffuser. Customize its sleek stainless steel finish. Terra offers focused illumination with a 20-degree beam angle and customizable color temperatures from 2700K to 6500K, effortlessly blending style and functionality for your outdoor space.

### Related Family & Dimension

Rated Power	3W
Diameter (mm)	55
Height (mm)	70

For More Details Scan QR Code



## ARITA | 94620.000

IN-GROUND LIGHT



IP67 CRI≥90 30,000 Hrs | LM80 | B10 IK08

Introducing Arita, a sleek in-ground light powered by Cree with die-cast aluminium construction. The optic lens diffuser and silver finish provide precise illumination. Arita offers a focused 30-degree beam angle, customizable color temperatures from 2700K to 6500K, blending style and functionality for your outdoor space.

### Related Family & Dimension

Rated Power	2W
Diameter (mm)	48
Height (mm)	42

For More Details Scan QR Code



## DEZINE | 92270.000

IN-GROUND LIGHT



IP67 CRI≥90 30,000 Hrs | LM80 | B10 IK08

Meet Dezine, a Cree-powered in-ground light with die-cast aluminium construction. The tempered glass diffuser ensures durability, while the customizable grey finish adds a modern touch. Illuminate your outdoor space with color temperatures ranging from 2700K to 6500K, seamlessly blending style and functionality. Dezine is the perfect choice for enhancing your outdoor lighting design.

### Related Family & Dimension

Rated Power	3W
Diameter (mm)	90
Height (mm)	108

Rated Power	6W
Diameter (mm)	110
Height (mm)	96

For More Details Scan QR Code



## HYDRO FLOOR MINI | 94120.000

IN-GROUND LIGHT



IP67 CRI≥90 30,000 Hrs | LM80 | B10 IK08

Introducing Hydro Floor Mini, a sleek in-ground light powered by Cree with die-cast aluminium construction and anodized aluminium reflector. With an optic lens diffuser and a modern grey finish, it offers versatile illumination with beam angles of 20 and 30 degrees. Customize the ambiance with color temperatures from 2700K to 6500K, effortlessly blending style and functionality outdoors.

### Related Family & Dimension

Rated Power	15W
Diameter (mm)	160
Height (mm)	38

For More Details Scan QR Code



## RETRO | 96530.000

IN-GROUND LIGHT



IP67 CRI≥90 30,000 Hrs | LM80 | B10 IK08

Meet Retro, a Cree-powered in-ground light with die-cast aluminium and anodized aluminium diffuser. Customize its sleek stainless steel finish. Retro offers precise illumination with a 15-degree beam angle and customizable color temperatures from 2700K to 6500K, effortlessly blending style and functionality for your outdoor space.

### Related Family & Dimension

Rated Power	3W
One Way	
Diameter (mm)	65
Height (mm)	17

Rated Power	3W
Two Way	
Diameter (mm)	65
Height (mm)	17

Rated Power	3W
Four Way	
Diameter (mm)	65
Height (mm)	17

For More Details Scan QR Code



## REEVO | 90450.000

IN-GROUND LIGHT



IP65 CRI≥90 30,000 Hrs | LM80 | B10 IK08

Meet Reevo, a Cree-powered in-ground light with die-cast aluminium and clear glass diffuser. Customize its sleek black finish to your liking. Reevo offers versatile beam angles from 28 to 60 degrees and customizable color temperatures from 2700K to 6500K, effortlessly blending style and functionality for your outdoor space.

### Related Family & Dimension

Rated Power	12W
Diameter (mm)	130
Height (mm)	125

For More Details Scan QR Code



## PAMIRA | 99850.000

IN-GROUND LIGHT



IP65 CRI≥90 30,000 Hrs | LM80 | B10 IK08

Meet Pamira, a Cree-powered in-ground light with die-cast aluminium and a clear glass diffuser. Customize its elegant design in black or your preferred finish. Pamira offers versatile beam angles from 28 to 60 degrees, and customizable color temperatures from 2700K to 6500K, effortlessly blending style and functionality for your outdoor space.

### Related Family & Dimension

Rated Power	9 X 1W
Diameter (mm)	134
Height (mm)	74
Rated Power	9 X 2W
Diameter (mm)	200
Height (mm)	124

For More Details Scan QR Code



## FRESNO | 96530.000

IN-GROUND LIGHT



IP67 CRI≥90 30,000 Hrs | LM80 | B10 IK08

Introducing Fresno, a sleek in-ground light powered by Cree with die-cast aluminium construction. The optic lens diffuser and silver finish offer elegant illumination. Fresno features a focused 15-degree beam angle, customizable color temperatures from 2700K to 6500K, seamlessly blending style and functionality for your outdoor space.

### Related Family & Dimension

Rated Power	8W
Diameter (mm)	116
Height (mm)	75

For More Details Scan QR Code



## ANNA | 94180.000

ASYMMETRIC IN-GROUND LIGHT



IP67 CRI≥90 30,000 Hrs | LM80 | B10 IK08

Introducing Anna, a Cree-powered in-ground light with die-cast aluminium construction. The tempered glass diffuser and stainless steel finish add durability and elegance. Anna offers versatile beam angles of 15, 24, 30, and 60 degrees, with customizable color temperatures from 2700K to 6500K. Illuminate your outdoor spaces with Anna's blend of style and functionality.

### Related Family & Dimension

Rated Power	7W
Diameter (mm)	78
Height (mm)	78
Rated Power	36W
Diameter (mm)	170
Height (mm)	131

For More Details Scan QR Code



## DANZA | 99100.000

ASYMMETRIC IN-GROUND LIGHT



IP67 CRI≥90 30,000 Hrs | LM80 | B10 IK08

Meet Danza, a Cree-powered in-ground light with die-cast aluminium construction. Customize its sleek design in white, black, or your preferred finish. Danza features an anodized aluminium reflector and optic lens diffuser, offering precise beam angles from 5 to 45 degrees. Explore color temperatures from 2700K to 6500K, effortlessly blending style and versatility for your outdoor space.

### Related Family & Dimension

Rated Power	42W
Diameter (mm)	330
Height (mm)	260

For More Details Scan QR Code



# SPIKE LIGHTS



## REEDS | 97650.000

SPIKE LIGHT



IP65 CRI≥90 30,000 Hrs | LM80 | B10 IK08

Meet Reeds, an Osram-powered spike light with aluminium construction and frosted PUMMA diffuser. Customize its sleek black finish. Reeds offers a broad 110-degree beam angle and customizable color temperatures from 2700K to 6500K, effortlessly blending style and functionality for your outdoor space.

### Related Family & Dimension

Rated Power	1.4W
Diameter (mm)	16
Height (mm)	500

For More Details Scan QR Code



## FOCAL | 90840.000

SPIKE LIGHT



IP65 CRI≥90 30,000 Hrs | LM80 | B10 IK08

Meet Focal, a Cree-powered spike light with aluminium and glass construction, featuring a clear glass diffuser. Customize its sleek graphite gray finish. Focal offers focused illumination with a 45-degree beam angle and customizable color temperatures from 2700K to 6500K, effortlessly blending style and functionality for your outdoor space.

### Related Family & Dimension

Rated Power	GU10
Diameter (mm)	64
Length (mm)	103
Height (mm)	1222

For More Details Scan QR Code



## PICTO | 98650.000

SPIKE LIGHT




IP65 CRI≥90 30,000 Hrs | LM80 | B10 IK08

Meet Picto, a Cree-powered spike light with sleek aluminium construction and a clear glass diffuser. Customize its elegant black finish. Picto offers versatile illumination with 25 and 45-degree beam angles, and customizable color temperatures from 2700K to 6500K, effortlessly blending style and functionality for your outdoor space.

### Related Family & Dimension

Rated Power	6W
Diameter (mm)	60
Length (mm)	80
Height (mm)	145

For More Details Scan QR Code



## TAVI | 98640.000

SPIKE LIGHT



IP67 CRI≥90 30,000 Hrs | LM80 | B10 IK08

Meet Tavi, a Cree-powered spike light with sleek aluminium construction and a clear glass diffuser. Customize its modern graphite gray finish. Tavi offers focused illumination with a 45-degree beam angle and customizable color temperatures from 2700K to 6500K, effortlessly blending style and functionality for your outdoor space.

### Related Family & Dimension

Light Source	GU10
Diameter (mm)	65
Length (mm)	100
Height (mm)	268.5

For More Details Scan QR Code



## ADRO | 98630.000 | 98620.000 C

SPIKE LIGHT



IP65 CRI≥90 30,000 Hrs | LM80 | B10 IK08

Introducing Adro, a sleek Cree-powered spike light with aluminium construction and a clear glass diffuser. Customize its modern graphite gray finish. Adro offers focused illumination with a 45-degree beam angle and customizable color temperatures from 2700K to 6500K, effortlessly combining style and functionality for your outdoor space.

### Related Family & Dimension

Rated Power	6W
Diameter (mm)	63
Length (mm)	85
Height (mm)	202
Rated Power	6W
Diameter (mm)	63
Length (mm)	116
Height (mm)	202

For More Details Scan QR Code



## VILS | 92310.000

SPIKE LIGHT



IP65 CRI≥90 30,000 Hrs | LM80 | B10 IK08

Introducing Vils, a Cree-powered spike light with sleek aluminium construction and a clear glass diffuser. Customize its elegant black finish. Vils offers focused illumination with a 30-degree beam angle and customizable color temperatures from 2700K to 6500K, effortlessly combining style and functionality for your outdoor space.

### Related Family & Dimension

Power Source	GU10
Diameter (mm)	100
Length (mm)	120
Height (mm)	468

For More Details Scan QR Code



## POWER SPOT | 95590.000

FLOOD LIGHT



IP65 CRI≥90 30,000 Hrs | LM80 | B10 IK08

Meet Superspot, a stainless steel garden light powered by Cree. The modern graphite gray finish is customizable, and Superspot offers adjustable color temperatures from 2700K to 6500K. Elevate your outdoor space with this sleek and functional surface-mounted light.

### Related Family & Dimension

Rated Power	4W
Width (mm)	55
Length (mm)	55
Height (mm)	87

For More Details Scan QR Code



## FENA | 98060.000

FLOOD LIGHT



IP65 CRI≥90 30,000 Hrs | LM80 | B10 IK08

Meet Fena, a Cree-powered garden light with aluminium construction and a clear glass diffuser. Customize its stylish gray finish, with additional options available. Fena offers adjustable illumination with beam angles of 12, 20, and 30 degrees, and customizable color temperatures from 2700K to 6500K, effortlessly blending style and functionality for your garden space.

### Related Family & Dimension

Rated Power	45W
Width (mm)	172
Length (mm)	172
Height (mm)	230

For More Details Scan QR Code



## STROM PRIME | 98090.000

FLOOD LIGHT



IP65 CRI≥90 30,000 Hrs | LM80 | B10 IK08

Meet Strom Prime, a Cree-powered garden light with aluminium construction, clear glass diffuser, and customizable gray finish. Choose from adjustable beam angles (20, 30, 60 degrees) and color temperatures (2700K to 6500K) to effortlessly elevate your garden space.

### Related Family & Dimension

Rated Power	20W/30W
Width (mm)	125
Length (mm)	125
Height (mm)	182

For More Details Scan QR Code



## STROM TNT | 98080.000

FLOOD LIGHT



IP66 | CRI≥90 | 30,000 Hrs | LM80 | B10 | IK08

Meet Strom TNT, a versatile garden light with aluminium construction and a clear glass diffuser. Powered by Cree or Osram, customize its finish with the standard gray or choose from additional options. Strom TNT offers flexible illumination with beam angles of 15, 20, 30, and 15 x 60 degrees, along with customizable color temperatures from 2700K to 6500K, effortlessly blending style and functionality for your garden space.

### Related Family & Dimension

For More Details Scan QR Code

Rated Power	
45W   56W   72W	
Width (mm)	145
Length (mm)	321
Height (mm)	199



## NIDDA | 94560.000

FOCUS LIGHT



IP65 | CRI≥90 | 30,000 Hrs | LM80 | B10 | IK08

Meet Nidda, a Cree-powered garden light with aluminium construction, clear glass diffuser, and customizable graphite gray finish. Choose adjustable color temperatures from 2700K to 6500K to effortlessly elevate your garden space with style and functionality.

### Related Family & Dimension

For More Details Scan QR Code

Rated Power	10W
Diameter (mm)	60
Length (mm)	130
Height (mm)	163



## VILS SURFACE | 98610.000

FOCUS LIGHT



IP65 | CRI≥90 | 30,000 Hrs | LM80 | B10 | IK08

Meet Vils Surface, a Cree-powered garden light with aluminium and glass construction, customizable gray finish, and focused 30-degree beam angle. Elevate your outdoor space with adjustable color temperatures from 2700K to 6500K, effortlessly blending style and functionality.

### Related Family & Dimension

For More Details Scan QR Code

Rated Power	8W
Diameter (mm)	102
Length (mm)	150
Height (mm)	295



## VISTA | 94220.000

BEAM ANGLE ADJUSTABLE FOCUS LIGHT



IP67 | CRI≥90 | 30,000 Hrs | LM80 | B10 | IK08

Meet Vista, a Cree-powered garden light with aluminium construction, clear glass diffuser, and customizable dark gray finish. Choose from adjustable beam angles (10 to 40 degrees) and color temperatures (2700K to 6500K) to effortlessly elevate your garden space.

### Related Family & Dimension

Rated Power 8W  
Diameter (mm) 62  
Length (mm) 103  
Height (mm) 87

Rated Power 12W  
Diameter (mm) 62  
Length (mm) 133  
Height (mm) 98

Rated Power 15W  
Diameter (mm) 67  
Length (mm) 151  
Height (mm) 100

Rated Power 25W  
Diameter (mm) 89  
Length (mm) 212  
Height (mm) 148

For More Details Scan QR Code



# BOLLARD LIGHTS

## BOXY | 97760.000

BOLLARD LIGHT



IP65 CRI≥90 50,000 Hrs | LM80 | B10 IK08

Introducing Boxy, a sleek die-cast aluminium luminaire powered by Cree. Its anodized aluminium reflector and optic lens diffuser create a focused beam angle of 30 degrees. Customize the body finish in black or your preferred option. With color temperatures ranging from 2700K to 6500K, Boxy seamlessly combines style and functionality.

### Related Family & Dimension

Rated Power	6W
Width (mm)	54
Length (mm)	160
Height (mm)	650
LED Rotating Angle	320°

For More Details Scan QR Code



## CLENCH | 92320.000

BOLLARD LIGHT



IP65 CRI≥90 50,000 Hrs | LM80 | B10 IK08

Introducing Clench, a black die-cast aluminium luminaire powered by Cree. With an anodized aluminium reflector and optic lens diffuser, Clench offers a focused 30-degree beam angle. Customize its sleek design, blending style seamlessly with functionality across color temperatures from 2700K to 6500K.

### Related Family & Dimension

Rated Power	3.3W
Width (mm)	50
Length (mm)	75
Height (mm)	700

For More Details Scan QR Code



## LORI

BOLLARD LIGHT



IP65 CRI≥90 50,000 Hrs | LM80 | B10 IK08

Introducing Lori, a black die-cast aluminium luminaire powered by Cree. With an anodized aluminium reflector and glass diffuser, Lori provides a wide 118-degree beam angle. Customize the body finish to suit your preference. Lori seamlessly combines style and functionality with color temperatures ranging from 2700K to 6500K.

### Related Family & Dimension

Rated Power	18W
Diameter (mm)	80
Height (mm)	1250

For More Details Scan QR Code



## ATRIO | 95520.000

BOLLARD LIGHT



IP65 CRI>80 50,000 Hrs | LM80 | B10 IK08

Meet Atrio, a Cree-powered die-cast aluminium luminaire with an anodized aluminium reflector and optic lens diffuser. Choose the body finish in white, black, or your preference. Atrio offers a focused 28-degree beam angle, customizable upon request. Seamlessly blending style and functionality, it spans color temperatures from 2700K to 6500K.

### Related Family & Dimension

Rated Power	18W
Diameter (mm)	120
Height (mm)	650

For More Details Scan QR Code



## AVOLA | 95390.000

BOLLARD LIGHT



IP65 CRI>80 50,000 Hrs | LM80 | B10 IK08

Meet Avola, a Cree-powered die-cast aluminium luminaire with an anodized aluminium reflector and optic lens diffuser. Available in dark grey, silver, white, rust, and black, with customization options. Avola offers a wide 110-degree beam angle, seamlessly combining style and functionality across color temperatures from 2700K to 6500K.

### Related Family & Dimension

Rated Power	9.3W
Diameter (mm)	65
Height (mm)	750

For More Details Scan QR Code



## AXIS | 98810.000

BOLLARD LIGHT



IP65 CRI≥90 50,000 Hrs | LM80 | B10 IK08

Meet Axis, a Cree-powered die-cast aluminium luminaire with an anodized aluminium reflector and optic lens diffuser. Available in dark grey, silver, white, rust, and black, with customization options. Axis offers a focused 30-degree beam angle, effortlessly combining style and functionality across color temperatures from 2700K to 6500K.

### Related Family & Dimension

Rated Power	10W
Width (mm)	105
Length (mm)	155
Height (mm)	900

For More Details Scan QR Code



## TORI | 99470.000

BOLLARD LIGHT



IP65 CRI≥90 50,000 Hrs | LM80 | B10 IK08

Introducing Tori, a black die-cast aluminium luminaire powered by Cree. With an anodized aluminium reflector and glass diffuser, Tori provides a wide 118-degree beam angle. Customize the body finish to suit your style, effortlessly combining functionality with color temperatures ranging from 2700K to 6500K.

### Related Family & Dimension

Rated Power	9W
Diameter (mm)	110
Height (mm)	900

For More Details Scan QR Code



## MARO | 99540.000

BOLLARD LIGHT



IP65 CRI≥90 30,000 Hrs | LM80 | B10 IK08

Introducing Maro, a Cree-powered die-cast aluminium luminaire with an anodized aluminium reflector and glass diffuser. Choose from body finishes in grey, black, and customization options. Maro features a focused 30-degree beam angle, effortlessly combining style and functionality across color temperatures from 2700K to 6500K.

### Related Family & Dimension

Rated Power	18W
Diameter (mm)	150
Height (mm)	900

For More Details Scan QR Code



## LINDA | 95400.000

BOLLARD LIGHT



IP65 CRI≥90 50,000 Hrs | LM80 | B10 IK08

Introducing Linda, a Cree-powered die-cast aluminium luminaire with an anodized aluminium reflector and optic lens diffuser. Choose from body finishes in grey, black, and customization options. Linda features a focused 30-degree beam angle, effortlessly combining style and functionality across color temperatures from 2700K to 6500K.

### Related Family & Dimension

Rated Power	12W
Height (mm)	230

For More Details Scan QR Code



# WALL LIGHTS



## SEEGO R | 86680.000

RECESSED WALL LIGHT



IP65 CRI≥90 30,000 Hrs | LM80 | B10 IK08

Meet Seego R, a Cree-powered wall light with a sleek aluminium and glass design. The clear glass diffuser, available in black, white, or customizable finishes, creates a modern aesthetic. With a 90-degree beam angle and adjustable color temperatures from 2700K to 6500K, Seego R offers versatile and stylish wall lighting for any space.

### Related Family & Dimension

Rated Power	3W
Diameter (mm)	100

For More Details Scan QR Code



## MICRO R | 99580.000

RECESSED WALL LIGHT



IP65 CRI≥90 30,000 Hrs | LM80 | B10 IK08

Micro R: A modern wall light with clear glass diffuser, anodized aluminium reflector, and Cree-powered brilliance. Silver finish and customizable, offering adjustable color temperatures from 2700K to 6500K for versatile lighting in a sleek design.

### Related Family & Dimension

Rated Power	3W
Diameter (mm)	80

For More Details Scan QR Code



## MICRO SQ | 97870.000

RECESSED WALL LIGHT



IP65 CRI≥90 30,000 Hrs | LM80 | B10 IK08

Introducing Micro SQ, a Cree-powered recessed wall light with clear glass and a wide 90-degree beam angle. Choose Satin Nickel or customize. Illuminate your space with adjustable color temperatures from 2700K to 6500K, providing a sleek and functional solution for recessed wall lighting.

### Related Family & Dimension

Rated Power	3W
Width (mm)	80
Length (mm)	80

For More Details Scan QR Code



## SEEGO STEP SQ | 86690.000

RECESSED WALL LIGHT



IP65 CRI≥90 30,000 Hrs | LM80 | B10 IK08

Meet Seego Step SQ, a Cree-powered recessed wall light with clear glass and a wide 90-degree beam angle. Choose black, white, or customize. Illuminate your space with adjustable color temperatures from 2700K to 6500K, offering a stylish and functional solution for recessed wall lighting.

### Related Family & Dimension

Rated Power	3W
Width(mm)	100
Length(mm)	100

For More Details Scan QR Code



## SEEGO FLAT SQ | 86610.000

RECESSED WALL LIGHT



IP65 CRI≥90 30,000 Hrs | LM80 | B10 IK08

Meet Seego Flat SQ, a Cree-powered recessed wall light with clear glass and a wide 90-degree beam angle. Choose black, white, or customize. Illuminate your space with adjustable color temperatures from 2700K to 6500K, offering a stylish and functional solution for recessed wall lighting.

### Related Family & Dimension

Rated Power	3W
Width (mm)	100
Length (mm)	100

For More Details Scan QR Code



## IMPULSE | 98990.000

RECESSED WALL LIGHT




IP65 CRI≥90 30,000 Hrs | LM80 | B10 IK08

Introducing Impulse, a sleek Cree-powered recessed wall light with clear glass and a wide 90-degree beam angle. Choose black, white, or customize. Illuminate your space with adjustable color temperatures from 2700K to 6500K, providing a stylish and functional solution for recessed wall lighting.

### Related Family & Dimension

Rated Power	3W
Width (mm)	225
Length (mm)	195

For More Details Scan QR Code



## TOTO | 99480.000

RECESSED WALL LIGHT



IP65 CRI≥90 30,000 Hrs | LM80 | B10 IK08

Meet Toto, an Epistar-powered recessed wall light with aluminium and glass construction and a frosted glass diffuser. Opt for the sleek black finish or customize it according to your preference. Illuminate your space with adjustable color temperatures ranging from 2700K to 6500K. Toto effortlessly combines style and functionality, offering a versatile solution for your lighting needs.

### Related Family & Dimension

Rated Power	3W
Width (mm)	70
Length (mm)	230
Height (mm)	80

For More Details Scan QR Code



## REETA | 99520.000

RECESSED WALL LIGHT



IP65 CRI≥90 30,000 Hrs | LM80 | B10 IK08

Introducing Reeta, a sleek Cree-powered recessed wall light with clear glass and an anodized aluminium reflector. Choose the stylish Grey finish or customize it. Illuminate your space with adjustable color temperatures from 2700K to 6500K, offering a sophisticated lighting solution.

### Related Family & Dimension

Rated Power	3.2W
Length (mm)	233
Width (mm)	80
Height (mm)	113

For More Details Scan QR Code



## ALEMA | 99490.000

RECESSED WALL LIGHT



IP67 CRI≥90 30,000 Hrs | LM80 | B10 IK08

Meet Alema, an Epistar-powered recessed wall light with aluminium and glass construction, featuring a frosted glass diffuser. Opt for the sleek Dark Grey finish or customize it to your preference. Illuminate your space with adjustable color temperatures from 2700K to 6500K. Alema effortlessly blends style and functionality, providing a versatile solution for your recessed wall lighting needs.

### Related Family & Dimension

Rated Power	4W
Width (mm)	80
Length (mm)	233
Height (mm)	113

For More Details Scan QR Code



## ALISO | 99500.000

RECESSED WALL LIGHT



IP65 CRI≥90 30,000 Hrs | LM80 | B10 IK08

Introducing Aliso, a Samsung-powered recessed wall light with clear glass and an anodized aluminium reflector. Choose Grey or customize. Illuminate your space with adjustable color temperatures from 2700K to 6500K, providing a stylish and functional solution for recessed wall lighting.

### Related Family & Dimension

Rated Power	4W
Length (mm)	80
Height (mm)	233

For More Details Scan QR Code



## SEEGO SURFACE | 86680.000

WALL LIGHT



IP65 CRI≥90 30,000 Hrs | LM80 | B10 IK08

Meet Seego surface, a Cree-powered wall light with a sleek aluminium and glass design. The clear glass diffuser, available in black, white, or customizable finishes, creates a modern aesthetic. With a 55-degree beam angle and adjustable color temperatures from 2700K to 6500K, Seego surface offers versatile and stylish wall lighting for any space.

### Related Family & Dimension

Rated Power	5W
Diameter (mm)	110
Width (mm)	22

For More Details Scan QR Code



## AGOLUX | 99750.000

UP & DOWN WALL LIGHT



IP65 CRI≥85 30,000 Hrs | LM80 | B10 IK08

Meet Agolux, a Samsung-powered wall light with aluminium construction, frosted glass diffuser, and customizable finish in black or white. Enjoy a broad 88-degree beam angle, with additional options available. Illuminate your space with adjustable color temperatures from 2700K to 6500K, effortlessly blending style and functionality in this sleek wall light.

### Related Family & Dimension

Rated Power	10W
Width (mm)	60
Length (mm)	55

For More Details Scan QR Code



## LAN PRIME | 97340.000

UP & DOWN WALL LIGHT



IP65 CRI≥85 30,000 Hrs | LM80 | B10 IK08

Meet Lan Prime, a Samsung-powered wall light with aluminium construction, frosted glass diffuser, and customizable black or white finish. Enjoy a broad 88-degree beam angle, with additional options available. Illuminate your space with adjustable color temperatures from 2700K to 6500K, effortlessly blending style and functionality in this sleek wall light.

### Related Family & Dimension

Rated Power	2 X 6W
Width (mm)	60
Length (mm)	96
Height (mm)	160

For More Details Scan QR Code



## LEGO | 90100.000

UP & DOWN BEAM ANGLE ADJ WALL LIGHT



IP65 CRI≥85 30,000 Hrs | LM80 | B10 IK08

Meet Lego, a Samsung-powered wall light with aluminium and glass construction, customizable in black or white. Enjoy an adjustable beam angle from 0 to 100 degrees horizontally and 0 to 90 degrees vertically. Illuminate your space with adjustable color temperatures from 2700K to 6500K, effortlessly combining style and functionality in this sleek wall light.

### Related Family & Dimension

Rated Power	2 X 6W
Width (mm)	100
Length (mm)	100
Height (mm)	125

Rated Power	2 X 9W
Width (mm)	110
Length (mm)	130
Height (mm)	160

For More Details Scan QR Code



## BIT | 95840.000

WALL LIGHT



IP65 CRI≥90 30,000 Hrs | LM80 | B10 IK08

Introducing Bit, a Cree-powered wall light with aluminium construction and a clear glass diffuser. Enjoy a focused 30-degree beam angle for precise illumination. Opt for the sleek black finish or customize it based on your preference. Illuminate your space with adjustable color temperatures ranging from 2700K to 6500K, seamlessly blending style and functionality in this compact wall light.

### Related Family & Dimension

Rated Power	5W
Width (mm)	80
Length (mm)	102
Height (mm)	114

For More Details Scan QR Code



## LAN | 97250.000

UP & DOWN WALL LIGHT



IP65 CRI≥90 30,000 Hrs | LM80 | B10 IK08

Lan, a Cree-powered wall light with aluminium and glass construction, an anodized aluminium reflector, and clear glass diffuser. Enjoy a wide 88-degree beam angle. Choose black or white finishes, with customizable options. Illuminate your space with adjustable color temperatures from 2700K to 6500K, effortlessly blending style and functionality in this sleek wall light.

### Related Family & Dimension

Rated Power	2 X 6W
Width (mm)	67
Length (mm)	100
Height (mm)	155

For More Details Scan QR Code



## DIRO | 97820.000

UP & DOWN WALL LIGHT



IP65 CRI≥90 30,000 Hrs | LM80 | B10 IK08

Introducing Diro, a Cree-powered wall light with aluminium construction, featuring an anodized aluminium reflector and clear glass diffuser. Opt for the sleek black finish or customize it according to your preference. Illuminate your space with adjustable color temperatures ranging from 2700K to 6500K, effortlessly combining style and functionality in this sophisticated wall light.

### Related Family & Dimension

Rated Power	12W
Diameter (mm)	90
Length (mm)	133
Height (mm)	182
Rated Power	2 X 12W
Diameter (mm)	90
Length (mm)	133
Height (mm)	220

For More Details Scan QR Code



## DIRO PRIME | 91080.000

UP & DOWN WALL LIGHT



IP65 CRI≥90 30,000 Hrs | LM80 | B10 IK08

Introducing Diro Prime, a Cree-powered wall light with aluminium construction, featuring an anodized aluminium reflector and clear glass diffuser. Opt for the sleek black finish or customize it according to your preference. Illuminate your space with adjustable color temperatures ranging from 2700K to 6500K, effortlessly combining style and functionality in this sophisticated wall light.

### Related Family & Dimension

Rated Power	12W
Diameter (mm)	87
Length (mm)	130
Height (mm)	145
Rated Power	2 X 12W
Diameter (mm)	90
Length (mm)	130
Height (mm)	250

For More Details Scan QR Code



## NAVO R | 97700.000

UP & DOWN WALL LIGHT



IP65 CRI≥90 30,000 Hrs | LM80 | B10 IK08

Introducing Navo R, a Cree-powered wall light with aluminium and glass construction, featuring an anodized aluminium reflector and clear glass diffuser. Choose from black or white finishes, with customization options available. Illuminate your space with adjustable color temperatures from 2700K to 6500K, seamlessly blending style and functionality in this sleek wall light.

### Related Family & Dimension

Rated Power	2 X 6W
Width (mm)	108
Length (mm)	120
Height (mm)	240

For More Details Scan QR Code



## SHYN | 97740.000

UP & DOWN WALL LIGHT



IP65 CRI≥90 30,000 Hrs | LM80 | B10 IK08

Meet Shyn, a Cree-powered wall light with aluminium and glass construction, an anodized aluminium reflector, and clear glass diffuser. Enjoy a focused 10-degree beam angle. Choose from black or white finishes, with customizable options. Illuminate your space with adjustable color temperatures from 2700K to 6500K, effortlessly blending style and functionality in this sleek wall light.

### Related Family & Dimension

Rated Power	12W
Width (mm)	100
Length (mm)	100
Height (mm)	140

Rated Power	2 X 12W
Width (mm)	100
Length (mm)	132
Height (mm)	220

For More Details Scan QR Code



## NAVO SQ | 97700.000

UP & DOWN WALL LIGHT



IP65 CRI≥90 30,000 Hrs | LM80 | B10 IK08

Introducing Navo SQ, a Cree-powered wall light with aluminium and glass construction, featuring an anodized aluminium reflector and clear glass diffuser. Choose from a black or white finish, with customization options available. Illuminate your space with adjustable color temperatures from 2700K to 6500K, seamlessly blending style and functionality in this sleek wall light.

### Related Family & Dimension

Rated Power	2 X 6W
Width (mm)	94
Length (mm)	106
Height (mm)	240

For More Details Scan QR Code



## SPLIT | 93180.000

UP & DOWN WALL LIGHT



IP65 CRI≥90 30,000 Hrs | LM80 | B10 IK08

Meet Split, a Cree-powered wall light with aluminium and glass construction, an anodized aluminium reflector, and clear glass diffuser. Enjoy a broad 90-degree beam angle. Choose from black or white finishes, with customizable options. Illuminate your space with adjustable color temperatures from 2700K to 6500K, effortlessly blending style and functionality in this sleek wall light.

### Related Family & Dimension


Rated Power	2 X 6W
Width (mm)	90
Length (mm)	60
Height (mm)	260

For More Details Scan QR Code



## HEDRA | 97770.000

WALL LIGHT

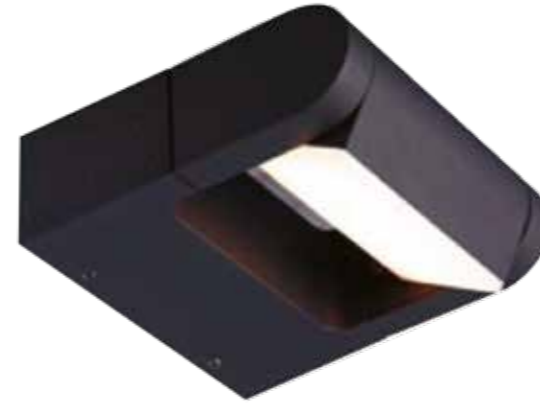

IP65 CRI≥90 30,000 Hrs | LM80 | B10 IK08

Introducing Hedra, a Samsung-powered wall light featuring aluminium and polycarbonate construction with a frosted aluminium diffuser. Choose from black, white, or customize to suit your style. Illuminate your space with adjustable color temperatures ranging from 2700K to 6500K. Hedra offers a sleek and functional solution for your wall lighting needs.

### Related Family & Dimension

Rated Power	6W
Width (mm)	54
Overall Height (mm)	328

For More Details Scan QR Code



## MONA | 97690.000

WALL LIGHT



IP65 CRI≥90 30,000 Hrs | LM80 | B10 IK08

Introducing Mona, a Samsung-powered wall light with aluminium and glass construction, featuring a frosted glass diffuser. Opt for the sleek black finish or customize it according to your preference. Illuminate your space with adjustable color temperatures ranging from 2700K to 6500K. Mona effortlessly combines style and functionality, providing a sophisticated lighting solution for your walls.

### Related Family & Dimension

Rated Power	11W
Width (mm)	180
Length (mm)	220
Height (mm)	35

For More Details Scan QR Code



## AXIS WALL | 97880.000

WALL LIGHT



IP65 CRI≥90 30,000 Hrs | LM80 | B10 IK08

Meet Axis Wall, a Samsung-powered wall light with frosted aluminium diffuser. Choose black, white, or customize. Illuminate your space with adjustable color temperatures from 2700K to 6500K, offering a stylish and functional solution for wall lighting.

### Related Family & Dimension

Rated Power	9W
Width (mm)	100
Length (mm)	168
Height (mm)	273

For More Details Scan QR Code



## ALGO | 93660.000

BOUNDARY LIGHT



IP65 CRI≥90 30,000 Hrs | LM80 | B10 IK08

Introducing Algo, a Samsung-powered top boundary light crafted from aluminium and glass with a frosted glass diffuser. Choose black, white, or customize to fit your style. Illuminate your space with adjustable color temperatures ranging from 2700K to 6500K. Algo provides a sophisticated and versatile solution for top boundary lighting.

### Related Family & Dimension

Rated Power	23W
Length (mm)	290
Height (mm)	400

For More Details Scan QR Code



## LUCIA | 98590.000

WALL LIGHT



IP65 CRI≥90 30,000 Hrs | LM80 | B10 IK08

Meet Lucia, a Cree-powered wall light with a sleek aluminium and glass design. The clear glass diffuser and anodized aluminium reflector create a stylish look. Choose black, white, or customize to suit your taste. With a 90-degree beam angle and adjustable color temperatures from 2700K to 6500K, Lucia provides versatile and elegant wall lighting.

### Related Family & Dimension

Light Source	E27W
Diameter (mm)	300
Width (mm)	62

For More Details Scan QR Code



## REVATO | 93030.000

WALL LIGHT



IP65 | CRI≥90 | 30,000 Hrs | LM80 | B10 | IK08

Meet Revato, a Cree-powered wall light with a sleek aluminium and glass design. The frosted glass diffuser create a stylish look. Choose black, white, or customize to suit your taste. With a 120-degree beam angle and adjustable color temperatures from 2700K to 6500K, Revato provides versatile and elegant wall lighting.

### Related Family & Dimension

Rated Power	20W
Diameter (mm)	220
Width (mm)	62

For More Details Scan QR Code



## REVATO HM | 93030.000

WALL LIGHT



IP65 | CRI≥90 | 30,000 Hrs | LM80 | B10 | IK08

Meet Revato HM, a Cree-powered wall light with a sleek aluminium and glass design. The opal diffuser and anodized aluminium reflector create a stylish look. Choose black, white, or customize to suit your taste. With a 120-degree beam angle and adjustable color temperatures from 2700K to 6500K, Revato HM provides versatile and elegant wall lighting.


### Related Family & Dimension

Rated Power	20W
Diameter (mm)	220
Width (mm)	62

For More Details Scan QR Code



# INDUSTRIAL LIGHTS

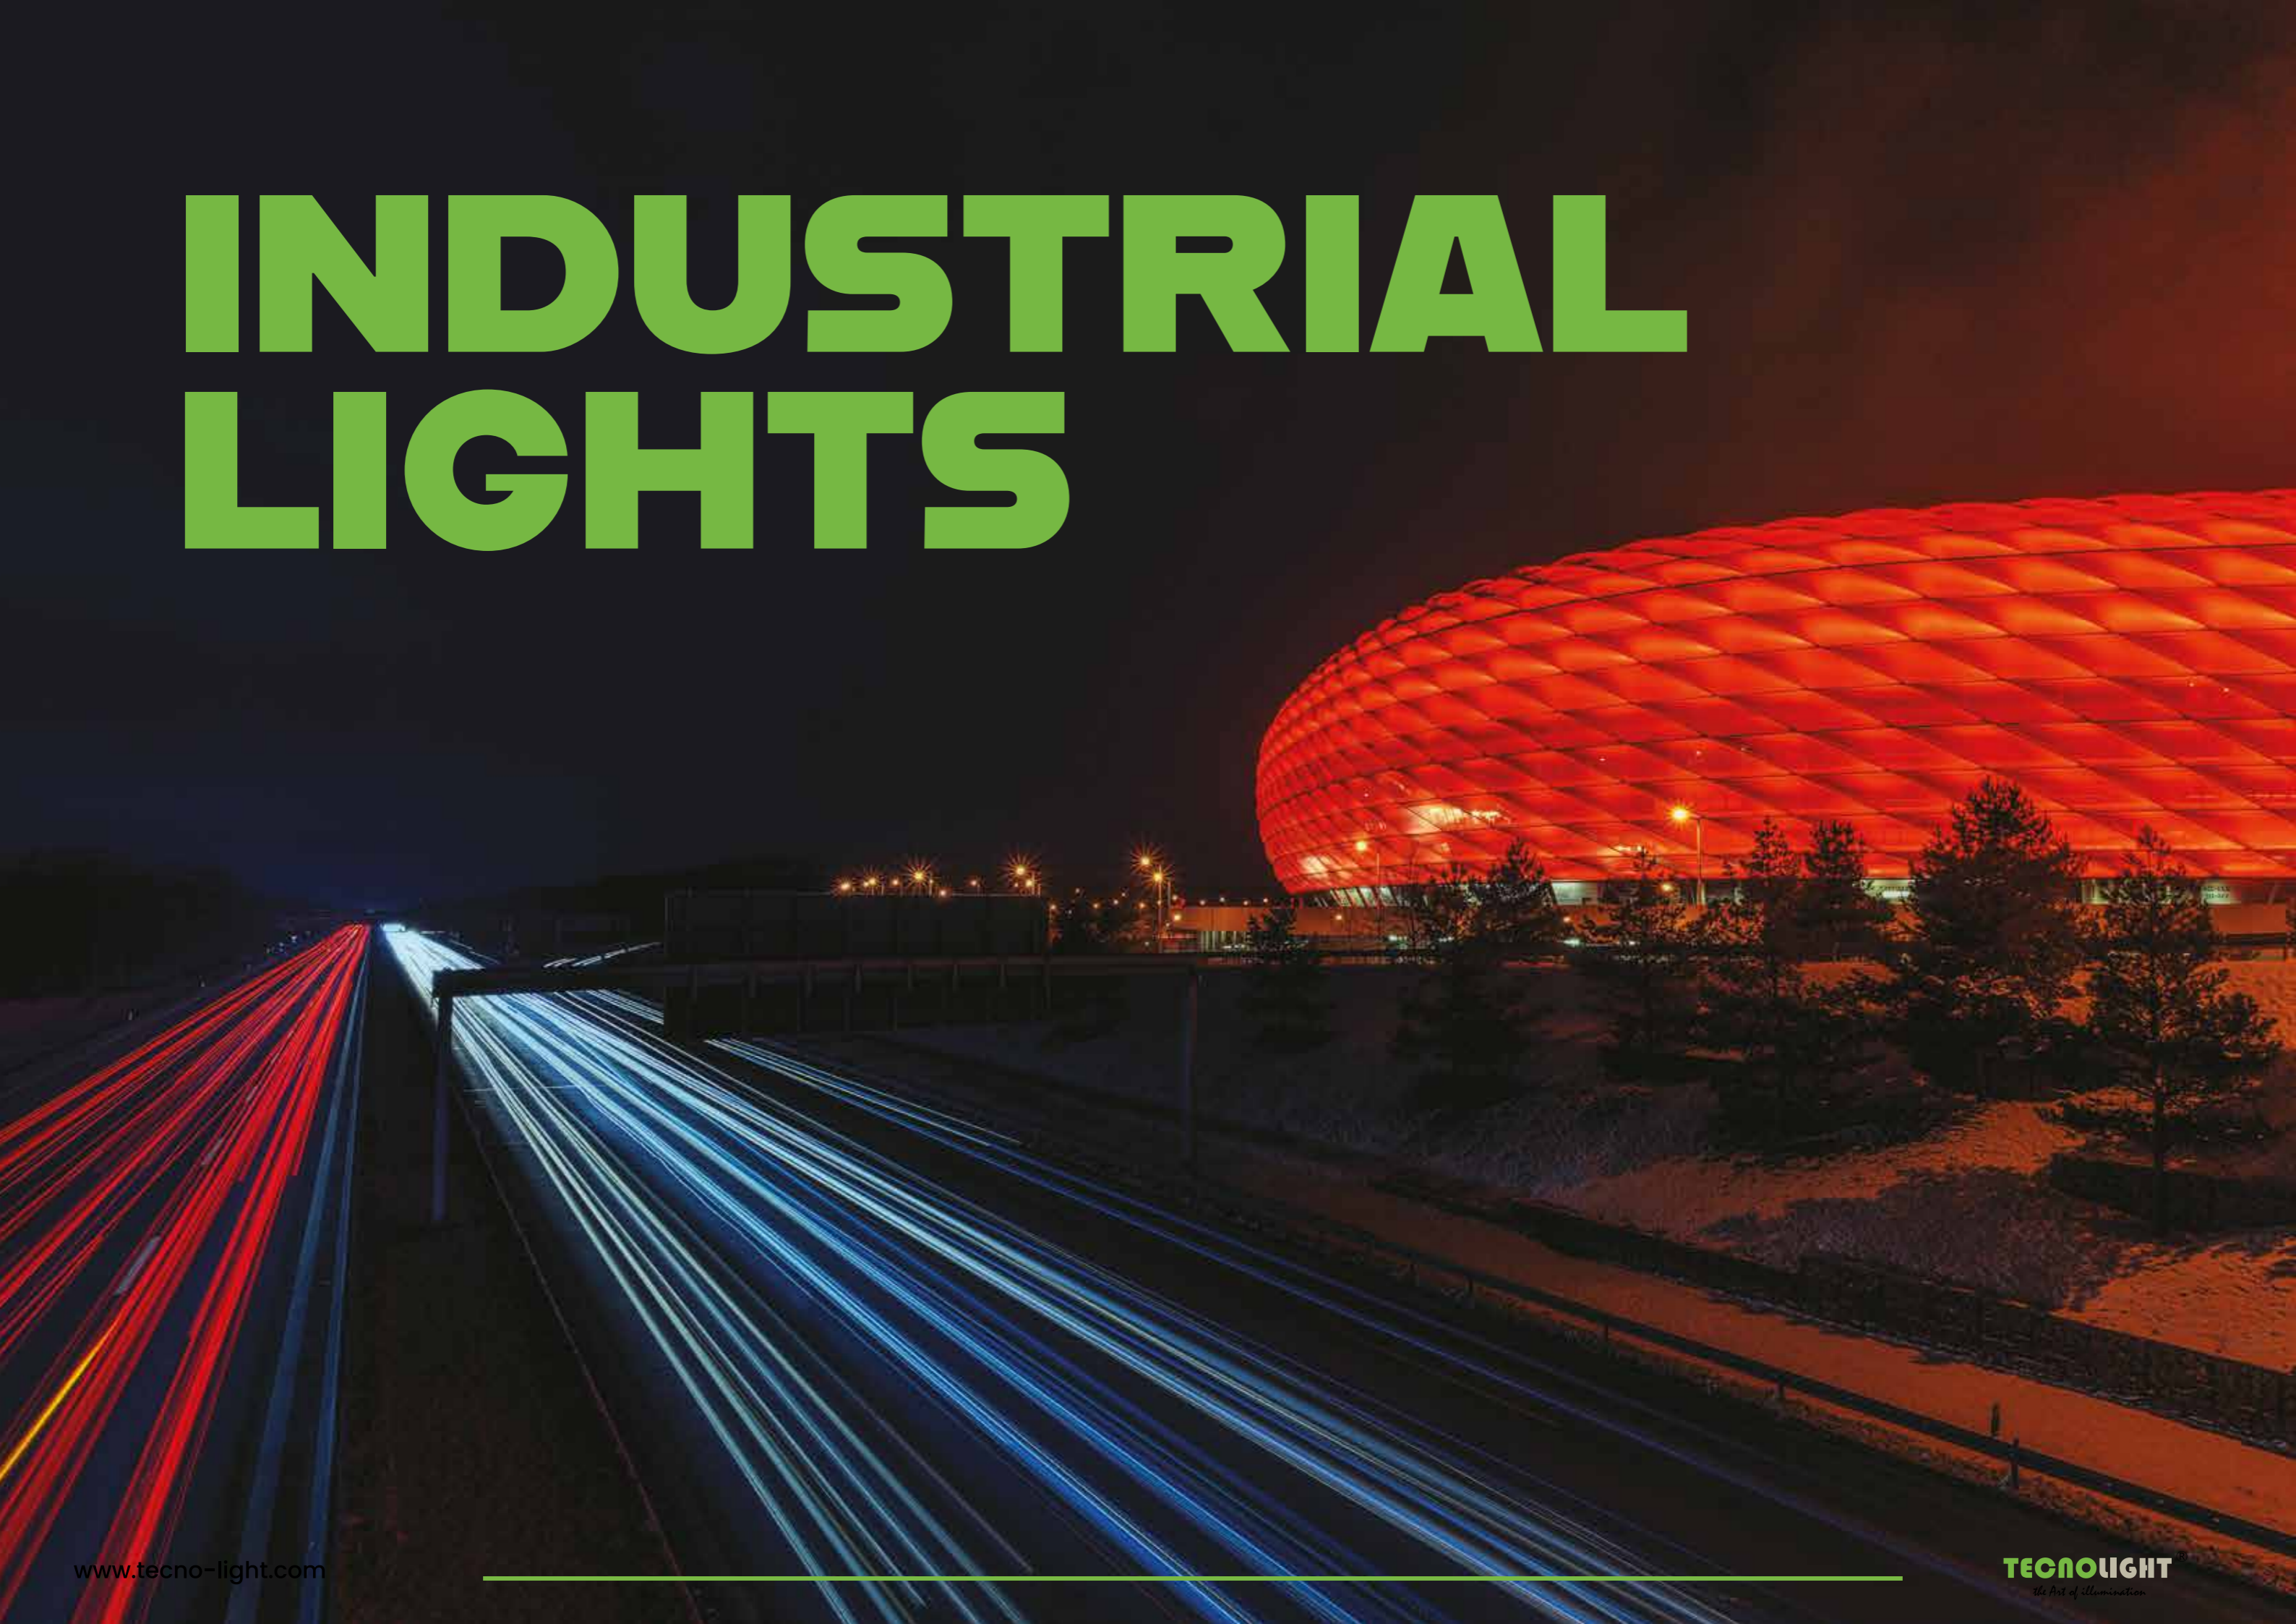

## ICINO | 98050.000

FLOOD LIGHT



IP65 CRI≥90 RoHS 30,000 Hrs | LM80 | B10

Meet Icino, the Die Cast Aluminium Flood Light with Nichia power, Tempered Impact Resistant PMMA Lens, and Anodized Aluminium reflector for wide-angle lighting (120 degree). In sleek black, with customization options, Icino's CCT ranges from 2700K to 6500K, providing versatile lighting in a durable design.

### Related Family & Dimension

Rated Power	30W
Width (mm)	175
Height (mm)	235

For More Details Scan QR Code



## MARICO | 92060.000

FLOOD LIGHT



IP66 CRI≥90 RoHS 30,000 Hrs | LM80 | B10

Meet Marico, the Die Cast Aluminium Flood Light with Cree power, Tempered Glass diffuser, and Aluminium reflector for wide-angle lighting (100 degree). Available in white, black, or custom finishes, Marico's CCT ranges from 2700K to 6500K, providing versatile lighting in a durable design.

### Related Family & Dimension

Rated Power	30W   50W
Width (mm)	185
Height (mm)	265
Rated Power	100W
Width (mm)	280
Height (mm)	300
Rated Power	150W
Width (mm)	280
Height (mm)	360
Rated Power	150W
Width (mm)	330
Height (mm)	370

For More Details Scan QR Code



## POWERPUFF | 92070.000

FLOOD LIGHT



IP67 RoHS 30,000 Hrs | LM80 | B10 CRI≥85

Meet Powerpuff, the Die Cast Aluminium Flood Light with Nichia power, Tempered Impact Resistant PMMA Lens, and Anodized Aluminium reflector for precise lighting (15 to 110 degrees adjustable). In sleek black, with customization options and an optional 135 x 65-degree beam angle. Powerpuff's CCT ranges from 2700K to 6500K, providing versatile lighting in a modern design.

### Related Family & Dimension

Rated Power	50W
Length (mm)	242
Height (mm)	102
Rated Power	100W
Length (mm)	242
Height (mm)	221
Rated Power	150W
Length (mm)	242
Height (mm)	340
Rated Power	200W
Length (mm)	419
Height (mm)	221
Rated Power	300W
Length (mm)	419
Height (mm)	340

For More Details Scan QR Code



## ETERNAL | 92120.000

HIGH BAY LIGHT



IP65 CRI≥90 RoHS 50,000 Hrs | LM80 | B10

Meet Eternal, the Die Cast Aluminium high bay Light with Nichia power, Milky PC Cover diffuser, and Acrylic reflector for gentle and efficient lighting. In sleek black, with customization options and an optional 120-degree beam angle. Eternal's CCT ranges from 2700K to 6500K, providing versatile lighting in a modern design.

### Related Family & Dimension

Rated Power	60W
Diameter (mm)	310
Height (mm)	318
Rated Power	100W
Diameter (mm)	410
Height (mm)	458
Rated Power	150W
Diameter (mm)	410
Height (mm)	456
Rated Power	200W
Diameter (mm)	410
Height (mm)	482

For More Details Scan QR Code



## RISTINA UFO | 92131.000

UFO HIGH BAY LIGHT



IP65 CRI≥85 RoHS 30,000 Hrs | LM80 | B10

Meet Ristina UFO, the Die Cast Aluminium high bay Light powered by Cree, with a sleek black finish and optional 120-degree beam angle. Customization options are available, and Ristina UFO's CCT ranges from 2700K to 6500K, providing impactful lighting in a modern design.

### Related Family & Dimension

Rated Power	100W/ 150W/ 200W
Diameter (mm)	280
Height (mm)	160

For More Details Scan QR Code



## MISTRAL | 98320.000

LINEAR HIGH BAY LIGHT



IP66 CRI≥90 RoHS 50,000 Hrs | LM80 | B10

Linear High Bay Luminaire - Modern is an aesthetically pleasing high efficiency high bay option. This fixture delivers high lumen output for warehouses, factories, utility areas, and more.

### Related Family & Dimension

Rated Power	400W
Length (mm)	1094
Width (mm)	374
Height (mm)	59

For More Details Scan QR Code



## CANOPY | 92870.000

CEILING | WALL LIGHT



IP65 CRI≥90 RoHS 50,000 Hrs | LM80 | B10

Canopy is a versatile and durable LED industrial light that is perfect for a variety of applications. It is easy to install and maintain, and it looks great too. Canopy provides bright, even illumination without being harsh or glaring, creating a smooth and inviting atmosphere in any industrial space.

### Related Family & Dimension

Rated Power	60W
Diameter (mm)	290
Height (mm)	144

For More Details Scan QR Code



## LUCEM | 99430.000

PARKING LIGHT



IP66 CRI≥90 RoHS 50,000 Hrs | LM80 | B10

Meet Lucem, the Passivated Aluminium Parking Light with Nichia power, Tempered Impact Resistant PMMA Lens, and a sleek white finish. Customization options are available, and Lucem offers an optional 150-degree beam angle. Its CCT ranges from 2700K to 6500K, providing durable and versatile lighting in a modern design.

### Related Family & Dimension

Rated Power	400W
Length (mm)	338
Width (mm)	160
Height (mm)	70

For More Details Scan QR Code



## CLIO | 92080.000

RECESSED FLOOD LIGHT



IP66 CRI≥90 RoHS 50,000 Hrs | LM80 | B10

Meet Clio, the Die Cast Aluminium Flood Light with Philips power, Tempered Impact Resistant PMMA Lens, and Anodized Aluminium reflector for focused lighting (30 and 60 degrees). Available in silver, with customization options, Clio's CCT ranges from 2700K to 6500K, providing versatile lighting in a durable design.

### Related Family & Dimension

Rated Power	50W
Length (mm)	235
Width (mm)	145
Height (mm)	75
Rated Power	100W
Length (mm)	235
Width (mm)	145
Height (mm)	97

For More Details Scan QR Code



## AURA | 93010.000

TRIPROOF LIGHT



IP66 CRI≥90 RoHS 50,000 Hrs | LM80 | B10

Aura is like a halo of light for your industrial space. It provides bright, even illumination without being harsh or glaring. It also has a soft, ethereal glow that can add a touch of sophistication to any factory, warehouse, or other industrial setting.

### Related Family & Dimension

Rated Power	20W
Length (mm)	630
Width(mm)	127

Rated Power	38W
Length (mm)	1260
Width(mm)	127

For More Details Scan QR Code



## AURA PLUS | 98360.000

TRIPROOF LIGHT



IP65 CRI≥90 RoHS 50,000 Hrs | LM80 | B10

Aura Plus is a well-made LED industrial light that is designed to provide long-lasting, reliable illumination with a smooth atmosphere. It is a good all-rounder because it is available in a variety of sizes and reflectors, and it is easy to install. It also has an elegant-looking silky trim that makes it a fashionable choice for industrial lighting.

### Related Family & Dimension

Light Source	2 X T8
Length (mm)	600
Width (mm)	97
Height (mm)	82

Power Rated	2 X T8
Length (mm)	1200
Width (mm)	97
Height (mm)	82

For More Details Scan QR Code



## ELNIGH | 98360.000

EXPLOSION PROOF LIGHT




IP65 CRI≥90 50,000 Hrs | LM80 | B10 Fire Rated

Elnigh is translucent and has soft, even light. The lamp base is made of flame-retardant material and is heat resistant. The high-brightness LED light source is energy-efficient, environmentally friendly, and low-maintenance. The lamp base has a strong and durable fastening buckle for quick installation.

### Related Family & Dimension

Rated Power	2 X 18W
Length (mm)	1370
Width (mm)	208
Height (mm)	20

For More Details Scan QR Code





# STREET LIGHTS

## STRADALUCE | 93210.000

POLE LIGHT



IP66 CRI≥90 RoHS 50,000 Hrs | LM80 | B10

Meet Stradaluce, the Die Cast Aluminium Pole Light with Nichia power, PC diffuser, and a gray finish. Customization options are available, and Stradaluce offers an optional 150-degree beam angle. Its CCT ranges from 2700K to 6500K, providing impactful lighting in a modern design.

### Related Family & Dimension

Power Rated  
30W | 40W | 60W | 100W | 120W  
150W | 180W | 240W | 280W

Length (mm) 950  
Width (mm) 455  
Height (mm) 125

Length (mm) 795  
Width (mm) 381  
Height (mm) 118

Length (mm) 668  
Width (mm) 330  
Height (mm) 110

Length (mm) 535  
Width (mm) 260  
Height (mm) 99

For More Details Scan QR Code



## THOR | 9468.000

POLE LIGHT



IP66 CRI≥90 RoHS 50,000 Hrs | LM80 | B10

Meet Thor, the Die Cast Aluminium Pole Light with Nichia power, clear glass diffuser, and a gray finish. Customization options are available, and Thor offers an optional 150-degree beam angle. Its CCT ranges from 2700K to 6500K, providing impactful lighting in a modern design.

### Related Family & Dimension

Rated Power 40W  
Length (mm) 400  
Width (mm) 603

For More Details Scan QR Code



## LOFFER | 97320.000

POLE LIGHT



IP67 CRI≥90 RoHS 50,000 Hrs | LM80 | B10

Meet Loffer, the Die Cast Aluminium Pole Light with Nichia power, PC diffuser, and a gray finish. Customization options are available, and Loffer offers an optional 150-degree beam angle. Its CCT ranges from 2700K to 6500K, providing impactful lighting in a modern design.

### Related Family & Dimension

Rated Power  
50W | 70W | 100W

Length (mm) 490  
Width (mm) 480  
Height (mm) 113

For More Details Scan QR Code



# FACADE LIGHTS



## ULTIMONEON 0816 | 92350.000

LED SIDE BEND RGB STRIP LIGHT

IP67



### Related Family & Dimension

Rated Power	12W/Mtr
Width(mm)	8
Height (mm)	16

Rated Power	19.2W/Mtr
Width(mm)	8
Height (mm)	16

For More Details Scan QR Code



## ULTIMONEON 1018 | 92350.000

LED SIDE BEND SPI PIXEL

IP67



### Related Family & Dimension

Rated Power	14.4W/Mtr
Width(mm)	10
Height (mm)	18

Rated Power	19.2W/Mtr
Width(mm)	10
Height (mm)	18

For More Details Scan QR Code



## CARSON PLUS | 94300.000

WALL WASHER LIGHT



IP67 RoHS 30,000 Hrs | LM80 | B10 CRI≥85

Wall washing can be used by anyone who wants to use vertical, indirect lighting placed at a certain distance and angle from a wall to create a smooth “wash” effect. If done correctly, wall washing can simultaneously hide rough imperfections, eliminate shadows, and uniformly light up a wall.

### Related Family & Dimension

Rated Power	36W
Length (mm)	1000
Width (mm)	50
Height (mm)	86.5

For More Details Scan QR Code



## ULTIMO NEON 1010 | 92350.000

LED TOP BEND STRIP LIGHT

IP67



### Related Family & Dimension

Rated Power	9W/Mtr
Width(mm)	10
Height (mm)	10

Rated Power	14W/Mtr
Width(mm)	10
Height (mm)	10

For More Details Scan QR Code



## ULTIMONEON 1018 | 92350.000

RGB + 4000K SIDE BEND STRIP LIGHT

IP67



### Related Family & Dimension

Rated Power	14.4W/Mtr
Width(mm)	10
Height (mm)	18

Rated Power	19.2W/Mtr
Width(mm)	10
Height (mm)	18

For More Details Scan QR Code



**CARSON | 93750.000**

WALL WASHER LIGHT



# LED DRIVER

IP67 CRI≥90 RoHS 30,000 Hrs | LM80 | B10

Wall washing is a lighting technique that uses vertical, indirect lighting to create a smooth and even wash of light on a wall. It can be used to hide imperfections, eliminate shadows, and uniformly light up a wall. Wall washing can be used in a variety of settings, both indoors and outdoors.

#### Related Family & Dimension

Rated Power  
9W | 12W | 18W | 24W | 36W

Length (mm) 300  
Length (mm) 500  
Length (mm) 1000

Width (mm) 45  
Height (mm) 87

Width (mm) 45  
Height (mm) 103

For More Details Scan QR Code



## 96450.000

### CONSTANT CURRENT DALI DIMMABLE DRIVER



#### Related Family & Dimension

Power Rated	10W
Length (mm)	109
Width (mm)	29

Power Rated	20W
Length (mm)	150
Width (mm)	43

Power Rated	30W
Length (mm)	150
Width (mm)	43

Power Rated	40W
Length (mm)	137
Width (mm)	81

For More Details Scan QR Code



## 96480.000

### CONSTANT VOLTAGE DALI DIMMABLE DRIVER



#### Related Family & Dimension

Power Rated	75W (12V/24V)
Length (mm)	204
Width (mm)	54

Power Rated	150W (12V/24V)
Length (mm)	206
Width (mm)	75

For More Details Scan QR Code



## 96450.000

### CONSTANT CURRENT TRIAC DIMMABLE DRIVER



#### Related Family & Dimension

Power Rated	10W
Length (mm)	109
Width (mm)	29

Power Rated	20W
Length (mm)	150
Width (mm)	43

Power Rated	30W
Length (mm)	150
Width (mm)	43

Power Rated	40W
Length (mm)	137
Width (mm)	81

For More Details Scan QR Code



## 96490.000

### CONSTANT VOLTAGE TRIAC DIMMABLE DRIVER



#### Related Family & Dimension

Power Rated	75W (12V/24V)
Length (mm)	213
Width (mm)	54

Power Rated	150W (12V/24V)
Length (mm)	260
Width (mm)	69

For More Details Scan QR Code



## 91200.000

### 12V/24V IP RATED DRIVER

IP67



#### Related Family & Dimension

Power Rated	30W
Length (mm)	239
Width (mm)	35

Power Rated	60W
Length (mm)	295
Width (mm)	35

Power Rated	100W
Length (mm)	309
Width (mm)	35

Power Rated	150W
Length (mm)	309
Width (mm)	35

Power Rated	200W
Length (mm)	256
Width (mm)	45

For More Details Scan QR Code



## WARRANTY POLICY

### Tecnolight Luminaires Warranty:

Tecnolight warrants that each Product will be free from defects in material and workmanship during the warranty period subject to the terms and conditions set forth herein in more detail. The warranty period starts on the date of invoice issued to the Customer and lasts subject to a maximum warranty period of up to 5 years, the warranty is 1 year for each 10,000 hours of predicted lifetime of the product.

### Warranty claim:

The Customer shall notify and return the defective Product to Tecnolight regional representative/distributor. All claims must be made in writing by email to the Local Distributor with Purchase proof. The Customer will be required to provide a documented record of the installation date, and installation location of the Product and the claimed failure. Tecnolight reserves and has the right to examine the Product to determine the cause of failure and patterns of usage.

### Implementation of the Warranty.

Tecnolight S.R.L. at its discretion, repair or replace the defective Product against the receipt of the defective unit(s) only. The replacement product will offer the same specifications as the original Product wherever possible. In case the defective Product is no longer available in Tecnolight Portfolio, it will be replaced by the most similar product. Replaced Products or replaced parts of the Product shall be covered under the initial Warranty for the remainder of the applicable warranty period for the Product that is replaced. Tecnolight S.R.L. will not bear Any costs incurred by the removal of the defective Product and reinstallation of the repaired or replacement Product.

Product Type	Life Time	Years of Warranty
Luminaires/ Industrial Lighting/ Commercial Lighting	30,000	3 Years
	50,000	5 Years

### Exclusions This Warranty does not cover the follow

1. Defective Product caused by modifications, alterations, drop, abuse, misuse,
2. Abnormal use or acts of nature.
3. Usage of fixtures in wrong application/wrong power supply.
4. Failure caused by fire, water, flood or lightning strike of the installation.
5. All parts subject to wear and tear, such as mechanical parts.
6. Warranty period is based on a maximum number of operation hours 12 hours/day.


**BST** | A RELIABLE TESTING FOR TRUST  
GLOBAL TESTING AND CERTIFICATION PRECISION SERVICE QUALITY

## Certificate of Compliance

**Certificate NO.** : BST180911524101SC  
**Applicant** : TECHNOLIGHT S.R.L.  
 Via Dei Laghi 19 Altavilla Vicentina (Vi) Cap 36077 Italy  
**Manufacturer** : TECHNOLIGHT S.R.L.  
 Via Dei Laghi 19 Altavilla Vicentina (Vi) Cap 36077 Italy  
**Product Name** : LED DOWN LIGHT  
**Trade Name** : **TECNOUGHT**  
the Art of illumination  
**Main Test Model** : 9 209 020 183 19  
**Additional Model** : 92090.000, 92150.000, 9 209 020 184 19, 9 209 020 185 19,  
 9 209 012 183 17, 9 209 012 184 17, 9 209 012 185 17, 9 215 042 184 27,  
 9 215 042 186 27  
**Test Standard** : EN 60598-2-1:1989  
 EN 60598-1:2015  
**As shown in the Test Report No.** : BST180911524101SR

The EUT described above has been tested by us with the listed standards and found in compliance with the council LVD directive 2014/35/EU. It is possible to use CE marking to demonstrate the compliance with this LVD Directive.  
 The certificate applies to the tested sample above mentioned only and shall not imply an assessment of the whole production.





**Christina Deng**  
 Manager  
 Sep. 05, 2018

**Shenzhen BST Technology Co., Ltd.**  
 Add: Building No.23-24, Zhiheng Industrial Park, Guankouer Road, Nantou, Nanshan District, Shenzhen, Guangdong, China  
 Certificate Search: <http://www.bst-lab.com>, Tel: 400-882-9628, 8009990305, E-mail: christina@bst-lab.com


**BST** | A RELIABLE TESTING FOR TRUST  
GLOBAL TESTING AND CERTIFICATION PRECISION SERVICE QUALITY

## Certificate of Compliance

**Certificate Number:** BST180911524102CC  
**Applicant** : TECHNOLIGHT S.R.L.  
 Via Dei Laghi 19 Altavilla Vicentina (Vi) Cap 36077 Italy  
**Manufacturer** : TECHNOLIGHT S.R.L.  
 Via Dei Laghi 19 Altavilla Vicentina (Vi) Cap 36077 Italy  
**Product Name** : LED DOWN LIGHT  
**Trade Name** : **TECNOUGHT**  
the Art of illumination  
**Main Test Model** : 9111 012 184 17  
**Additional Model** : 91300.000, 91310.000, 91520.000, 91320.000, 91130.000,  
 91110.000, 91680.000, 91220.000, 91230.000, 91450.000  
**Test Standard** : IEC 62321-4:2013+AMD1:2017, IEC 62321-5:2013,  
 IEC 62321-6:2015, IEC 62321-7-1:2015,  
 IEC 62321-7-2:2017, IEC 62321-8:2017  
**As shown in the Test Report No.** : BST180911524102CR

The EUT described above has been tested by us and found in compliance with the council RoHS 2 Directive 2011/65/EU Annex II (EU) 2015/863 as last amended by Directive (EU) 2017/2102. This certificate is only valid in conjunction with the test report.





**Tony Qian**  
 Approved Signatory  
 Sep.04, 2018


**Dongguan BST Testing Co., Ltd**  
 Add: A1201-1204 Xinsanqi Of Dongbao Road, Dongcheng District, Dongguan, Guangdong, China  
 Certificate Search: <http://www.bst-lab.com>, Tel:400-882-9628, 8009990305, E-mail: christina@bst-lab.com

# Certificates

1 Speditore - Expéditeur - Consigner - Expéditeur TECHNOLIGHT S.R.L. - VIA DEI LAGHI, 19 - 36077 ALTAVILLA VICENTINA (VI) - ITALY		C22330062191		ORIGINALE	
2 Destinatarlo - Destinataire - Consignee - Destinatarlo SUNRISE OASIS LIGHTING LLC 10th Street, Al Quoz Industrial 4 DUBAI EMIRATI ARABI UNITI UNITED ARAB EMIRATES		UNIONE EUROPEA UNION EUROPÉENNE EUROPEAN UNION UNIÓN EUROPEA			
4 Informazioni riguardanti il trasporto (Indicazione facoltativa) Informations relatives au transport Transport details - Expedicion		CERTIFICATO DI ORIGINE CERTIFICAT D'ORIGINE CERTIFICATE OF ORIGIN CERTIFICADO DE ORIGEN			
		3 Paese d'origine - Pays d'origine - Country of origin - Pays de origen EUROPEAN UNION - ITALY			
		5 Osservazioni - Remarques - Remarks - Observaciones INVOICE 2 OF 02/03/2022			
6 N. d'ordine; marche, numeri, quantità e natura dei colli; denominazione delle merci N° d'ordre; marques, numéros, nombre et nature des colis; désignation des marchandises Item number; marks, numbers, number and kind of packages; description of goods N° de orden; marcas, números, nombre y naturaleza de los bultos; designación de las mercancías			7 Quantità Quantité Quantity Cantidad		
1 PALLET CONTAINING: TCLS-001- TECHNOLIGHT ABNER 15,9W 4000K LED SQUARE ADJUSTABLE DOWNLIGHT BLACK FINISH POWERED BY CREE CHIP WITH WITH LED DRIVER (ALVIT) pcs 216 TCLS-002 TECHNOLIGHT OVID 9W 4000K LED ROUND ADJUSTABLE SPOTLIGHT WHITE FINISH POWERED BY CREE CHIP WITH WITH LED DRIVER (ALVIT) pcs 216			GROSS WEIGHT 155 NET WEIGHT 140		
8 La sottoscritta Autorità certifica che le merci sopra elencate sono originarie del Paese menzionato nel riquadro 3 L'Autorité soussignée certifie que les marchandises désignées ci-dessus sont originaires du pays figurant dans la case N° 3 The undersigned Authority certifies that the goods described above originate in in the country shown in box 3 La Autoridad infrascrita certifica que las mercancías designadas son originarias del país indicado en la casilla N° 3					

For Italy Verification website visit:  
<https://co.vancom.infocemere.it> (secure token F187249D77AF)


For ICC Verification website visit:  
<https://certificates.iccwbo.org>



CAMERA DI COMMERCIO INDUSTRIA ARTIGIANATO AGRICOLTURA DI VICENZA  
VICENZA CHAMBER OF COMMERCE INDUSTRY HANDICRAFT AND AGRICULTURE  
Ufficio Comunità Estere - Foreign Trade Department




Il Segretario Generale  
(ANTONIO LA MACCA)

N. Prof. 17386/2022  
VICENZA, 03/03/2022





INTERNATIONAL CHAMBER OF COMMERCE  
CERTIFICATE OF ORIGIN  
Approved Chamber (IT/02020)


### CERTIFICATO DI CIRCOLAZIONE DELLE MERCI


1. Esportatore (nome, indirizzo completo, paese) TECHNOLIGHT VIA MONTE GENEROSO 6/A 20155 MILANO IT		<b>EUR. 1 VE N. T 218696</b>	
Prima di compilare il formulario consultare le note al retro.			
2. Certificato utilizzato negli scambi preferenziali tra		UE-ITALIA	
3. Destinatarlo (nome, indirizzo completo, paese) (indicazione facoltativa) FUTURE FOR THE MANUFACTURE OF OFFIC FURNITURE PLOT N.17/19 & 21 INDUSTR ZONE 100 ACRE, BADR CITY EG		Egitto <small>(Indicare i paesi, gruppi di paesi o territori di cui traggono origine)</small>	
4. Paese, gruppo di paesi o territorio di cui i prodotti sono considerati originari U. E.	5. Paese, gruppo di paesi o territorio di destinazione EG-Egitto	7. Osservazioni	
6. Informazioni riguardanti il trasporto (indicazione facoltativa)			
8. N. d'ordine, marche, numeri, numero e natura dei colli (*), designazione delle merci		9. Massa lorda (kg) o altra misura (l, m³, ecc.)	10. Fattura (indicazione facoltativa)
1 PK APPARECCHI PER L'ILLUMINAZIONE, COMPRESI I PROIETT 94051190 ORI ED I RIFLETTORI E LORO PARTI		KG 10.5	1
		<b>TOTALE KG 10.5</b>	
11. VISTO DELLA DOGANA Dichiarazione certificata <b>Certificato A23ITQTG010002240E6 Vers. 1</b> Documento d'esportazione (*) modello <b>EX A</b> ..... <b>2240 D</b> del <b>23/03/23</b> Ufficio doganale <b>135100</b> Paese o territorio in cui il certificato è rilasciato ITALIA VICENZA ..... <b>addi 23/03/23</b>		 <b>23/03/23</b> <b>3.23</b>	
12. DICHIARAZIONE DELL'ESPORTATORE Io sottoscritto dichiaro che le merci di cui sopra soddisfano alle condizioni richieste per ottenere il presente certificato.		VICENZA <b>23/03/23</b> Fatto a ..... addi .....	
<p>TECHNOLIGHT VIA MONTE GENEROSO 6/A MILANO</p> <p>(Firma) </p> <p><a href="https://aidsonline85.adm.gov.it/Certificati?id=A23ITQTG010002240E6">https://aidsonline85.adm.gov.it/Certificati?id=A23ITQTG010002240E6</a></p>		<p>TECHNOLIGHT VIA MONTE GENEROSO 6/A MILANO</p> <p>(Firma) </p>	

# Certificates

		<b>Ref. Certif. No.</b> DE 2-02672
<b>IEC SYSTEM FOR MUTUAL RECOGNITION OF TEST CERTIFICATES FOR ELECTRICAL EQUIPMENT (IECEE) CB SCHEME</b>		
<b>CB TEST CERTIFICATE</b>		
Product	LED Linear Light	
Name and address of the applicant	TECHNOLIGHT SRL Via Dei Laghi 19 36077 Altavilla Vicentina VI, Italy	
Name and address of the manufacturer	TECHNOLIGHT SRL Via Dei Laghi 19 36077 Altavilla Vicentina VI, Italy	
Name and address of the factory	TECHNOLIGHT SRL Via Dei Laghi 19 36077 Altavilla Vicentina VI, Italy	
Ratings and principal characteristic:	AC 220-240V; 50/60Hz; 40W; ta:50°C; IP20; Class For other ratings, refer to test report.	
Trademark (if any)	TECNOLIGHT	
Customer's Testing Facility (CTF) Stage used	N/A	
Model / Type Ref.	96880.000; 93270.000; 95000.000; 96860.000; 93350.00 97280.000; 94140.000; 96870.000; 96890.000; 95010.00 96940.000	
Additional information (if necessary may also be reported on page 2)	-see also test report ref no. 50330243 001.	
A sample of the product was tested and found to be in conformity with	IEC 60598-2-1:1979 A1 IEC 60598-1:2014+A1 for national deviations see test report	
As shown in the Test Report Ref. No. which forms part of this Certificate	50330243 00	
This CB Test Certificate is issued by the National Certification Body		
	TÜV Rheinland LGA Products GmbH Tillystraße 2 · 90431 Nürnberg, Germany Phone + 49 221 806-1371 Fax + 49 221 806-3935 Mail: cert-validity@de.tuv.com Web: www.tuv.com	
Date: 19.02.2020	Signature	Dipl.-Ing. Univ. S. [Signature]

# GLOSSARY OF TERMS

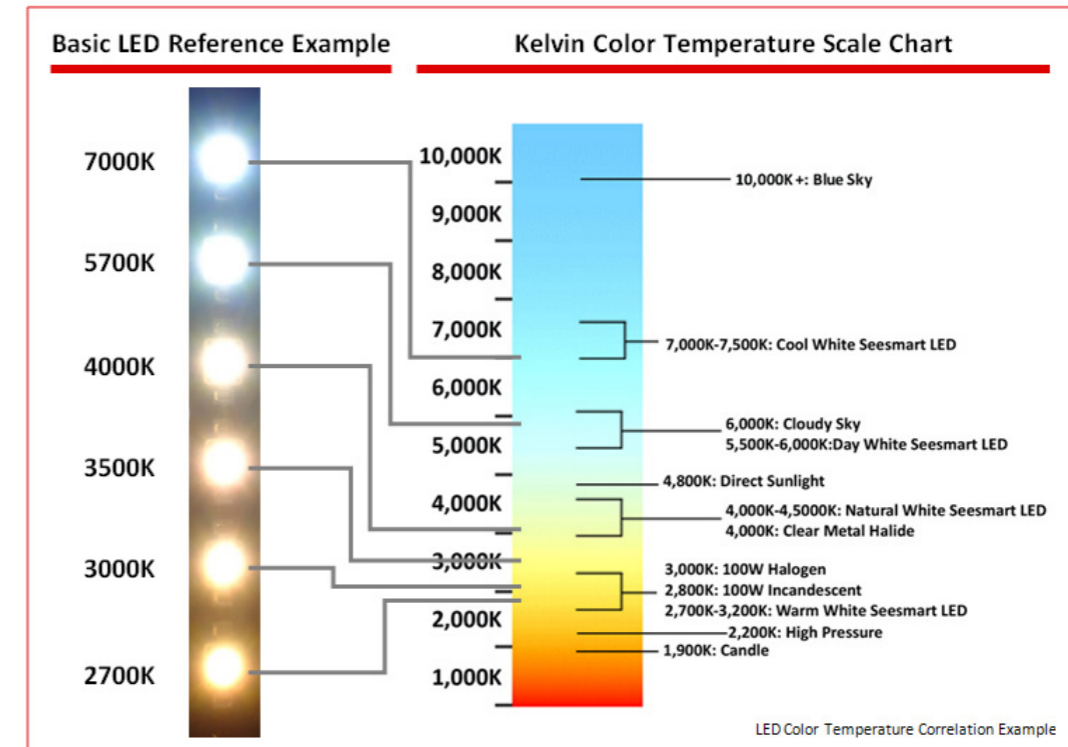

IP (INGRESS PROTECTION) RATING GUIDE	
SOLIDS	WATER
LEVEL OF INGRESS PROTECTION	LEVEL OF INGRESS PROTECTION
<b>1</b> Protected against a solid object greater than 50mm (such as a hand) (50N of force).	<b>1</b> Protected against vertically falling drops of water for 10 minutes at rate of 3mm/min.
<b>2</b> Protected against a solid object greater than 12.5mm (such as a finger) (10N of force).	<b>2</b> Protected against diagonally falling (up to 15°) drops of water for 10 minutes at rate of 3mm/min.
<b>3</b> Protected against a solid object greater than 2.5mm (such as a screwdriver) (3N of force).	<b>3</b> Protected against diagonally falling (up to 60°) sprays of water for 5 minutes at 0.7 LPM at 80-100 kPa.
<b>4</b> Protected against a solid object greater than 1mm (such as a wire) (3N of force).	<b>4</b> Protected against water splashed from all directions for 5 minutes at 10 LPM at 80-100 kPa.
<b>5</b> Dust protected. Limited ingress of dust permitted. Will not interfere with operation of equipment.	<b>5</b> Protected against a 6.3mm water nozzle for 3 minutes at 12.5 LPM at 30 kPa at a distance of 3 meters.
<b>6</b> Dust tight. No ingress of dust	<b>6</b> Protected against a 12.5mm water nozzle for 3 minutes at 100 LPM at 100 kPa at a distance of 3 meters.
 SOLID (DUST, SWI.)    LIQUIDS (WATER, J)	<b>7</b> Protected against 30 minute submersion at a depth of 1 meter.
	<b>8</b> Protected against continuous submersion for long periods at a depth of 3 meters.
	<b>9K</b> Protected against powerful, high temperature water jets.

## NOTE



## **TECHNOLIGHT S.R.L.**

Milano (Mli) Monte  
Generoso 6/A Cap 20155

[info@tecno-light.com](mailto:info@tecno-light.com)  
[www.tecno-light.com](http://www.tecno-light.com)